

Daikin air conditioners for your home, shops,  
restaurants, offices, small hotels...

[Multi Model Applications and Combination Tables](#)

**R-410A**



## ABOUT DAIKIN

Daikin has a worldwide reputation based on over 80 years' experience in the successful manufacture of high quality air conditioning equipment for industrial, commercial and residential use.



Daikin Airconditioning UK Ltd, Weybridge Head Office

## ENVIRONMENTAL CONSCIOUSNESS

**In all of us,  
a green heart**



### Enhancing the present - safeguarding the future

Throughout the last 50 years or so the basic building blocks of life - air, water and the earth - have been systematically subjected to increasing levels of pollution with little regard to their potentially devastating effects on future generations.

Recently however, concern has grown regarding climate changes, acid rain, water and air pollution and the constant degradation of Earth's natural resources. The very technology that created these problems is now being harnessed to halt and reverse them. Depletion of the ozone layer and global warming have been highlighted and are now being addressed. Government legislation prohibiting the use of toxic substances and the generation of pollutants has slowed down the destruction of the environment.

Daikin Europe is proud to have been pro active in this respect, closely following its Japanese parent in implementing policies that have often pre-empted official legislative codes and directives. As a result, a culture of "environmental management" has since 2001, played a key role in the company's day to day activities and development strategies.

Top management commitment is reflected in the establishment of a number of action plans, which are now strictly observed and implemented throughout the Daikin Group.

## TABLE OF CONTENTS

<b>Multi Model Applications</b>	
• Air conditioning - create a sense of well-being	4
• The benefits of a Multi System	5
<b>Indoor units</b>	6
<b>Outdoor units</b>	8
<b>R-410A Combination table</b>	10
<b>Specifications</b>	
• Indoor units	11
• Outdoor Units	22
<b>Accessories</b>	24
<b>Control Systems</b>	26
<b>Combination tables</b>	30
	3



# Multi Model applications

## Air conditioning - creating a sense of well-being


Air conditioning has become part of our daily life, providing comfort everywhere - at home, in shops, restaurants, offices and hotels. In fact, it's hard to imagine life without it. Air conditioning generates that pleasant feeling associated with an atmosphere that is close to the ideal.

Air conditioning supplies pure cool air when it's hot outside. In winter or those cooler periods during spring and autumn, the heat pump can provide either cooling or heating.


Daikin air conditioning provides year round comfort and wellbeing for residential, commercial and industrial applications alike.

### The basic facts about air conditioning:

#### cooling operation

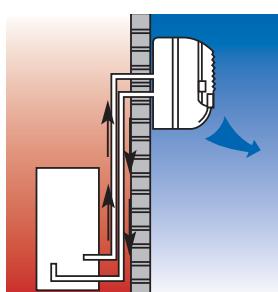

#### heating operation

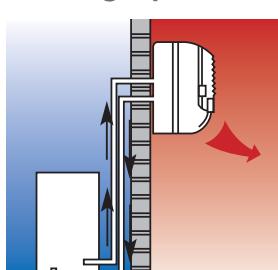

#### • Air conditioning for cooling

Air conditioning works like a domestic refrigerator, continuously removing heat from the cabinet and discharging it into the kitchen. This 'free' heat can be experienced by touching the coil on the back of the refrigerator. The principle of air conditioning is exactly the same.

A split system comprises an indoor and an outdoor unit, connected together by small copper tubing.

In summer, the indoor unit extracts heat from the room and exhausts it via the outdoor unit outside.


The indoor unit distributes cool air into the room, preventing unpleasant draughts and ensuring that the home remains cool and comfortable.

#### • Air conditioning for heating

In winter, the reverse occurs. Natural heat, which is present in the outdoor air - even when it's freezing - is extracted and transferred indoors. Air conditioners that are able to heat and cool are known as heat pump systems. A heat pump cuts down on the use of a traditional central heating, allowing it to be switched off, possibly completely during spring and autumn.

- **Inverter technology**

The use of integrated inverter control ensures maximum **energy efficiency** by supplying only the required heating or cooling load where a standard non inverter unit would supply maximum load in an on/off regime.

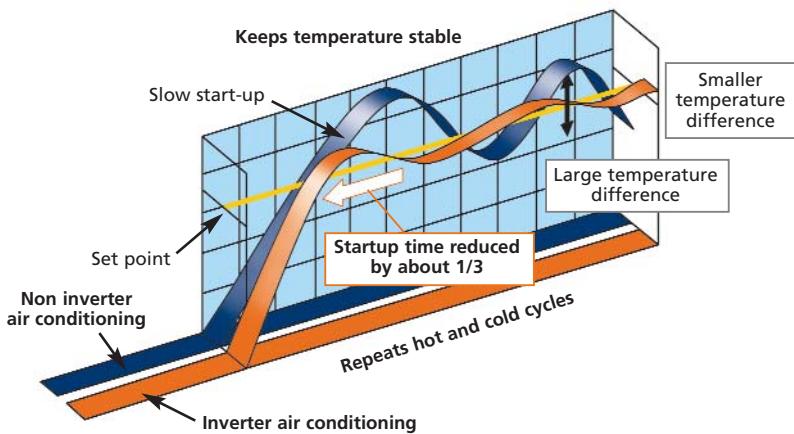

The rapid start up time provided by the inverter increases **comfort** by reducing the lead time in obtaining the required indoor temperature. Once the required temperature is reached, the inverter unit continuously scans the room for small changes and adjusts the room temperature in seconds, thereby increasing comfort once again.

## The benefits of a **Multi system**

- **Air conditioning in every room**

A Multi system allows up to 5 indoor units to operate off a single outdoor unit, thereby reducing installation space and costs. All indoor units can be individually controlled and do not need to be installed at the same time - extra units (up to a maximum of 5) can be added later.



- **The widest choice**

Different types of indoor units — wall mounted, concealed ceiling, floor standing etc - in different capacities can be mixed together in Multi system applications. Thus the ideal indoor unit can be selected for the bedroom, living room, office or wherever, according to the installation surface or personal requirements.



- **An ideal indoor climate**

A single outdoor unit can cool down or heat up a complete house, office or small shop at different times. A pleasant climate can be enjoyed whilst working at the desk in the afternoon, as well as a constant temperature in the living room and cool bedrooms in the evening.



# Indoor units


Daikin air conditioning introduces summer freshness and winter warmth. Creating a perfect balance between temperature, humidity, purity and air movement... Daikin air conditioning is the modern, cost effective route to indoor comfort throughout the year.



< Wall mounted unit



Wall mounted unit >

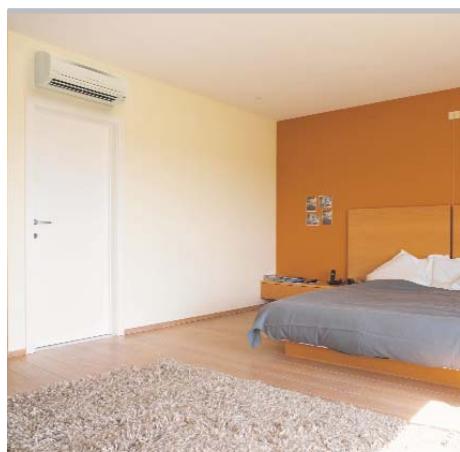


< Wall mounted unit



Flexi type unit >  
(ceiling suspended application)



< Floor standing unit

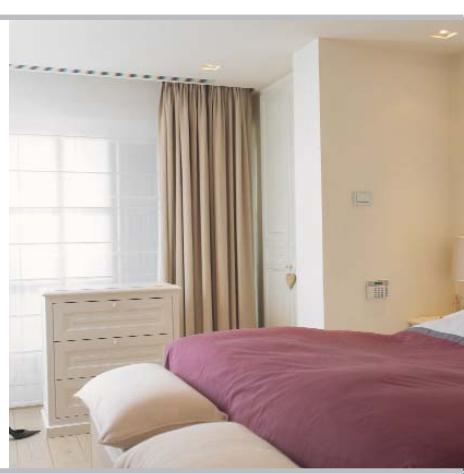

Slim concealed  
ceiling unit >

In offices, hotels, department stores and most other commercial premises Daikin air conditioning improves the indoor environment and creates a basis for increased business prosperity – efficiently, economically and discreetly.




< Concealed  
ceiling unit (for hotel  
application)



Concealed  
ceiling unit >



< Round Flow cassette

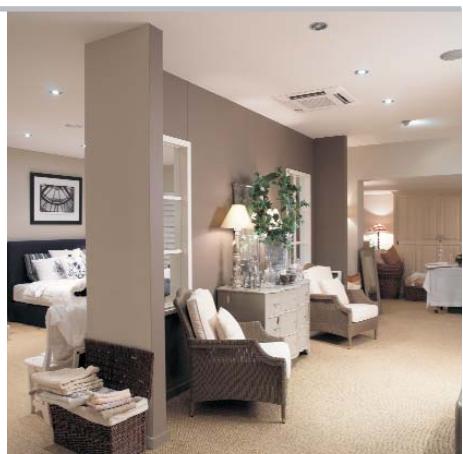

4-way blow ceiling  
mounted cassette >  
(600mm x 600mm)



< Ceiling  
suspended unit

# Possible outdoor models

## OUTDOOR UNITS - cooling only

Maximum number of indoor units	2	3	4	5
<b>2MKS~F</b>		X		
<b>3MKS~E</b>		X		
<b>4MKS~E/F</b>			X	
<b>5MKS~E</b>				X



## OUTDOOR UNITS - heat pump

Maximum number of indoor units	2	3	4	5
<b>2MXS~F*</b>		X		
<b>3MXS~E*</b>			X	
<b>4MXS~E/F*</b>				X
<b>5MXS~E*</b>				X

\* Note: At least 2 indoor units should be connected to this Multi outdoor unit.

# R-410A combination table

	2MKS40F	2MKS50F	3MKS50E	4MKS58E	4MKS75F	5MKS90E	2MXS40F	2MXS50F	3MXS52E	4MXS68F	4MXS80E	5MXS90E
	Wall mounted unit											
	Heat pump											
FTKS20DW	x	x	x	x	x	x						
FTKS20DL	x	x	x	x	x	x						
FTKS25DW	x	x	x	x	x	x						
FTKS25DL	x	x	x	x	x	x						
FTKS35DW	x	x	x	x	x	x						
FTKS35DL	x	x	x	x	x	x						
FTKS50F					x	x	x					
FTKS60F					x	x						
FTKS71F					x	x						
FTXG25E-W							x	x	x	x	x	x
FTXG25E-S							x	x	x	x	x	x
FTXG35E-W							x	x	x	x	x	x
FTXG-35E-S							x	x	x	x	x	x
CTXG50E-W									x	x	x	x
CTXG50E-S									x	x	x	x
FTXS20DW							x	x	x	x	x	x
FTXS20DL							x	x	x	x	x	x
FTXS25DW							x	x	x	x	x	x
FTXS25DL							x	x	x	x	x	x
FTXS35DW							x	x	x	x	x	x
FTXS35DL							x	x	x	x	x	x
FTXS20C							x	x	x	x	x	x
FTXS25C							x	x	x	x	x	x
FTXS35C							x	x	x	x	x	x
FTXS50F							x	x	x	x	x	x
FTXS60F									x	x	x	x
FTXS71F									x	x	x	x
FLKS25B	x	x	x	x	x	x						
FLKS35B	x	x	x	x	x	x						
FLKS50B				x	x	x						
FLKS60B				x	x	x						
FLXS25B							x	x	x	x	x	x
FLXS35B							x	x	x	x	x	x
FLXS50B								x	x	x	x	x
FLXS60B								x	x	x	x	x
FDKS25E	x	x	x	x	x	x						
FDKS35E	x	x	x	x	x	x						
FDKS50C				x	x	x						
FDKS60C				x	x	x						
FDXS25E							x	x	x	x	x	x
FDXS35E							x	x	x	x	x	x
FDXS50C								x	x	x	x	x
FDXS60C									x	x	x	x
FVXS25F	x	x	x	x	x	x	x	x	x	x	x	x
FVXS35F	x	x	x	x	x	x	x	x	x	x	x	x
FVXS50F					x	x	x		x	x	x	x
FDBQ25B					x	x	x		x	x	x	x
FBQ35B					x	x	x		x	x	x	x
FBQ50B					x	x	x		x	x	x	x
FBQ60B					x	x	x			x	x	x
FCQ35C					x	x	x		x	x	x	x
FCQ50C					x	x	x		x	x	x	x
FCQ60C					x	x	x			x	x	x
FFQ25B					x	x	x		x	x	x	x
FFQ35B					x	x	x		x	x	x	x
FFQ50B					x	x	x		x	x	x	x
FFQ60B					x	x	x			x	x	x
FHQ35B					x	x	x		x	x	x	x
FHQ50B					x	x	x		x	x	x	x
FHQ60B					x	x	x		x	x	x	x

# Specifications Indoor units



## FTXG-E & CTXG-E

Wall mounted unit



### Comfort

- Stylish and modern design
- Available in 2 colour variations
- Comfort mode reassures draught free operation
- Extremely quiet in operation

### Filter

- Titanium apatite photocatalytic air purification filter powerfully absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses

### Energy efficient

- ECONO mode decreases the power consumption so that other appliances that need large power consumption can be used
- Movement sensor automatically saves power consumption in unoccupied rooms

#### HEAT PUMP (air cooled)

			FTXG25E-W/S	FTXG35E-W/S	CTXG50E-W/S			
Dimensions	HxWxD	mm		275x840x150				
Weight		kg		9				
Front panel colour			Mat crystal white & mat crystal silver					
Air flow rate	cooling	H/L/SL	m³/min	7.7/4.7/3.8	8.1/4.9/4.1			
	heating	H/L/SL	m³/min	9.0/6.7/5.4	9.6/6.7/5.9			
Fan speed			steps	5 steps, silent and auto				
Sound pressure level	cooling	H/L/SL	dB(A)	38/25/22	39/26/23			
	heating	H/L/SL	dB(A)	38/28/25	39/29/26			
Sound power level	cooling	H	dB(A)	56	57			
Piping connections		liquid	mm	ø6.4				
		gas	mm	ø9.5	ø12.7			
		drain	mm	ø18.0				
Heat insulation				Both liquid and gas pipes				
Power supply		V1		1~, 220-240V, 50Hz				
Infrared remote control				ARC433A41				

# FTK/XS-D/F

Wall mounted unit



## Comfort

- Available in 2 colour variations
- Comfort mode reassures draught free operation
- Extremely quiet in operation
- F-series: 3-D air flow makes sure that a uniform temperature is achieved throughout the room

## Filter

- Titanium apatite photocatalytic air purification filter powerfully absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses

## Energy efficient

- ECONO mode decreases the power consumption so that other appliances that need large power consumption can be used
- Movement sensor automatically saves power consumption in unoccupied rooms

COOLING ONLY (air cooled)			FTKS20DW/L	FTKS25DW/L	FTKS35DW/L	FTKS50F	FTKS60F	FTKS71F
Dimensions	HxD	mm	283x800x195			290x1050x238		
Weight		kg	9			12	12	12
Front panel colour			White + white top (W) or white + silver top (L)			White		
Air flow rate	H/L/SL	m³/min	8.7/4.7/3.9	8.7/4.7/3.9	8.9/4.9/4.0	14.3 (H)	16.8 (H)	16.2 (H)
Fan speed		steps	5 steps, silent and auto			5 steps, silent and auto		
Sound pressure level	H/L/SL	dB(A)	38/25/22	38/25/22	39/26/23	43/34	45/36	46/37
Sound power level	H	dB(A)	56	56	57	59	61	62
Piping connections	liquid	mm	ø6.4			ø6.4		
	gas	mm	ø9.5			ø12.7		
	drain	mm	ø18.0			ø18		
Heat insulation			Both liquid and gas pipes			Both liquid and gas pipes		
Power supply	VM		1~, 220-240/220-230V, 50/60Hz			1~, 220-240V, 50Hz		
Infrared remote control			ARC433A43			ARC433A70		

HEAT PUMP (air cooled)			FTXS20DW/L	FTXS25DW/L	FTXS35DW/L	FTXS50F	FTXS60F	FTXS71F
Dimensions	HxD	mm	283x800x195			290x1050x238		
Weight		kg	9			12	12	12
Front panel colour			White + white top (W) or white + silver top (L)			White		
Air flow rate	cooling	H/L/SL	m³/min	8.7/4.7/3.9	8.7/4.7/3.9	8.9/4.8/4.0	14.3 (H)	16.8 (H)
	heating	H/L/SL	m³/min	9.4/5.8/5.0	9.4/5.8/5.0	9.7/6.0/5.2	16.1(H)	17.4(H)
Fan speed		steps	5 steps, silent and auto			5 steps, silent and auto		
Sound pressure level	cooling	H/L/SL	dB(A)	38/25/22	38/25/22	39/26/23	43/34	45/36
	heating	H/L/SL	dB(A)	38/28/25	38/28/25	39/29/26	42/33	44/35
Sound power level	cooling	H	dB(A)	56	56	57	59	61
Piping connections	liquid	mm	ø6.4			ø6.4		
	gas	mm	ø9.5			ø12.7		
	drain	mm	ø18.0			ø18		
Heat insulation			Both liquid and gas pipes			Both liquid and gas pipes		
Power supply	VM		1~, 220-240/220-230V, 50/60Hz			1~, 220-240V, 50Hz		
Infrared remote control			ARC433A50			ARC433A70		

# FTXS-C

Wall mounted unit



## Comfort

- C-series: dual air discharge flow for better air distribution
- Extremely quiet in operation

## Filter

- Air purification filter with photocatalytic deodorising function absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses

## Energy efficient

- Home leave operation saves energy during absence
- Movement sensor automatically saves power consumption in unoccupied rooms

### HEAT PUMP (air cooled)

				FTXS20C	FTXS25C	FTXS35C
Dimensions		HxWxD	mm		273x784x195	
Weight			kg	7.5	7.5	7.5
Front panel colour				White		
Air flow rate	cooling	H/L/SL	m³/min	7.7/4.2/3.6	7.7/4.2/3.6	7.7/4.4/3.8
	heating	H/L/SL	m³/min	7.8/5.3/4.6	7.8/5.3/4.6	8.1/5.3/4.6
Fan speed			steps		5 steps, silent and auto	
Sound pressure level	cooling	H/L/SL	dB(A)	38/25/22	38/25/22	39/26/23
	heating	H/L/SL	dB(A)	38/28/25	38/28/25	39/29/26
Sound power level	cooling	H	dB(A)	56	56	57
Piping connections	liquid		mm		ø6.4	
	gas		mm		ø9.5	
	drain		mm		ø18.0	
Heat insulation				Both liquid and gas pipes		
Power supply		VM/V1		1~, 220-240/220-230V, 50/60Hz		
Infrared remote control				ARC433A1		

# FLK/XS-B

Flexi type unit



## Comfort

- Vertical auto swing and wide angle louvers ensure that warm air reaches the furthest corners of a room and increase the air flow coverage
- Extremely quiet in operation

## Filter

- Air purification filter with photocatalytic deodorising function absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses

## Energy efficient

- Home leave operation saves energy during absence

## Flexible installation

- Allows both ceiling suspended as floor level installation

COOLING ONLY (air cooled)			FLKS25B	FLKS35B	FLKS50B	FLKS60B
Dimensions	HxWxD	mm		490x1,050x200		
Weight		kg	16	16	17	17
Front panel colour				Almond white		
Air flow rate	H/L/SL	m³/min	7.6/6.0/5.2	8.6/6.6/5.6	11.4/8.5/7.5	12.0/9.3/8.3
Fan speed		steps		5 steps, silent and auto		
Sound pressure level	H/L/SL	dB(A)	37/31/28	38/32/29	47/39/36	48/41/39
Sound power level	H	dB(A)	53	54	63	64
Piping connections	liquid	mm		ø6.4		
	gas	mm	ø9.5		ø12.7	
	drain	mm		ø18.0		
Heat insulation				Both liquid and gas pipes		
Power supply	VM			1~, 220-240/220-230V, 50/60Hz		
Infrared remote control				ARC433A6		

HEAT PUMP (air cooled)			FLXS25B	FLXS35B	FLXS50B	FLXS60B	
Dimensions	HxWxD	mm		490x1,050x200			
Weight		kg	16	16	17	17	
Front panel colour				Almond white			
Air flow rate	cooling heating	H/L/SL	m³/min m³/min	7.6/6.0/5.2 9.2/7.4/6.6	8.6/6.6/5.6 9.8/8.0/7.2	11.4/8.5/7.5 12.1/7.5/6.8	12.0/9.3/8.3 12.8/8.4/7.5
Fan speed			steps		5 steps, silent and auto		
Sound pressure level	cooling heating	H/L/SL	dB(A) dB(A)	37/31/28 37/31/29	38/32/29 39/33/30	47/39/36 46/35/33	48/41/39 47/37/34
Sound power level	cooling	H	dB(A)	53	54	63	64
Piping connections	liquid	mm		ø6.4			
	gas	mm	ø9.5		ø12.7		
	drain	mm		ø18.0			
Heat insulation				Both liquid and gas pipes			
Power supply	VM			1~, 220-240/220-230V, 50/60Hz			
Infrared remote control				ARC433A5			

# FVXS-F

Floor standing unit



## Comfort

- Vertical auto swing and wide angle louvers ensure that warm air reaches the furthest corners of a room and increase the air flow coverage
- Extremely quiet in operation

## Filter

- Titanium apatite photocatalytic air purification filter powerfully absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses

## Energy efficient

- ECONO mode decreases the power consumption so that other appliances that need large power consumption can be used


## Flexible installation

- Can be used for floor standing or lower wall applications
- As a floor standing model, it can be semi or fully recessed without loss of capacity

COOLING ONLY / HEAT PUMP				FVXS25F	FVXS35F	FVXS50F
Dimensions	HxD	mm		600x700x210		
Weight		kg		14		
Front panel colour				White		
Air flow rate	cooling	H/L/SL	m³/min	8.2/4.8/4.1	8.5/4.9/4.5	10.7/7.8/6.6
	heating	H/L/SL	m³/min	8.8/5.0/4.4	9.4/5.2/4.7	11.8/8.5/7.1
Fan speed		steps		5 steps, silent and auto		
Sound pressure level	cooling	H/L/SL	dB(A)	38/26/23	39/27/24	44/36/32
	heating	H/L/SL	dB(A)	38/26/23	39/27/24	45/36/32
Sound power level	cooling	H	dB(A)	54	55	56
Piping connections	liquid	mm		ø6.4	ø6.4	ø6.4
	gas	mm		ø9.5	ø9.5	ø12.7
	drain	mm		ø20	ø20	ø20
Heat insulation				Both liquid and gas pipes		
Power supply				1~, 220-240V, 50Hz		
Infrared remote control				ARC452A1		

# FDK/XS-E/C

Slim concealed ceiling unit

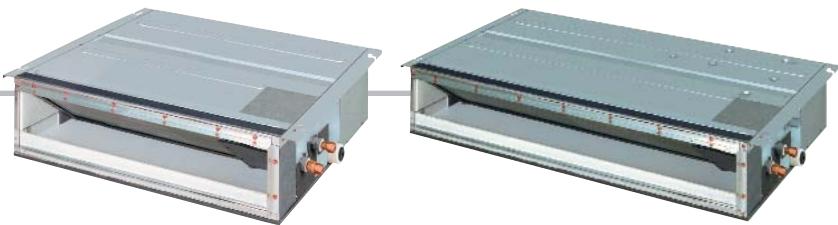

## Comfort

- Leaves maximum floor and wall space for furniture, decoration and fittings
- Extremely quiet in operation

## Filter

- Standard suction filter removes airborne dust particles to ensure a steady supply of clean air

## Energy efficient

- Home leave operation saves energy during absence

## Flexible installation

- Can easily be installed in rooms with a false ceiling of only 240mm depth
- A standard external static pressure (ESP) of 40Pa, makes it possible to use flexible ducts of varying lengths

### COOLING ONLY (air cooled)

			FDKS25E	FDKS35E	FDKS50C	FDKS60C
Dimensions	HxWxD	mm	200x700x620	200x900x620	200x1,100x620	200x1,100x620
Weight		kg	21	27	30	30
Fan speed		steps	5 steps, silent and auto	5 steps, silent and auto	5 steps, silent and auto	5 steps, silent and auto
Air flow rate	H/L/SL	m³/min	8.7/7.3/6.2	8.7/7.3/6.2	12.0/10.0/8.4	16.0/13.5/11.2
Sound pressure level	H/L/SL	dB(A)	35/31/29	35/31/29	37/33/31	38/34/32
Sound power level	H	dB(A)	53	53	55	56
Piping connections	liquid	mm	ø6.4		ø6.4	
	gas	mm	ø9.5		ø12.7	
	drain	ID	ø20.0		ø20.0	
		OD	ø26.0		ø26.0	
Heat insulation			Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes
Power supply	V1/VM		1~, 220-240V, 50Hz	1~, 220-240/220-230V, 50/60Hz	1~, 220-240/220-230V, 50/60Hz	1~, 220-240/220-230V, 50/60Hz
Infrared remote control				ARC433A8		

### HEAT PUMP (air cooled)

			FDXS25E	FDXS35E	FDXS50C	FDXS60C
Dimensions	HxWxD	mm	200x700x620	200x900x620	200x1,100x620	200x1,100x620
Weight		kg	21	27	30	30
Fan speed		steps	5 steps, silent and auto	5 steps, silent and auto	5 steps, silent and auto	5 steps, silent and auto
Air flow rate	cooling	H/L/SL	8.7/7.3/6.2	8.7/7.3/6.2	12.0/10.0/8.4	16.0/13.5/11.2
	heating	H/L/SL	8.7/7.3/6.2	8.7/7.3/6.2	12.0/10.0/8.4	16.0/13.5/11.2
Sound pressure level	cooling	H/L/SL	35/31/29	35/31/29	37/33/31	38/34/32
	heating	H/L/SL	35/31/29	35/31/29	37/33/31	38/34/32
Sound power level	cooling	H	53	53	55	56
Piping connections	liquid	mm	ø6.4		ø6.4	
	gas	mm	ø9.5		ø12.7	
	drain	ID	ø20.0		ø20.0	
		OD	ø26.0		ø26.0	
Heat insulation			Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes
Power supply	V1/VM		1~, 220-240V, 50Hz	1~, 220-240/220-230V, 50/60Hz	1~, 220-240/220-230V, 50/60Hz	1~, 220-240/220-230V, 50/60Hz
Infrared remote control				ARC433A7		

## FDBQ-B & FBQ-B

Concealed ceiling unit



### Comfort

- Leaves maximum floor and wall space for furniture, decoration and fittings
- Blends unobtrusively with any interior décor
- The position of the individual air discharge grilles can be altered, enabling a uniform temperature, even in irregularly shaped rooms
- Optimum air distribution
- Quiet in operation

### Energy efficient

- Home leave operation saves energy during absence

### Slim design for flexible installation

- Fits flush into narrow ceiling voids
- Only air suction and discharge grilles are visible
- The maximum external static pressure (ESP) is 88Pa for FBQ

HEAT PUMP (air cooled)				FDBQ25B	FBQ35B	FBQ50B	FBQ60B	
Dimensions	HxD		mm	230x652x502	300x700x800	300x1,000x800		
Weight			kg	17	30	31	41	
Fan speed			steps		2 steps (direct drive)			
Air flow rate	cooling	H/L	m³/min	6.5/5.2	11.5/9	14/10	19/14	
	heating	H/L	m³/min	6.95/5.2	11.5/9	14/10	19/14	
Sound pressure level	cooling	H/L	dB(A)	35/28	33/29	33/29	34/30	
	heating	H/L	dB(A)	35/29	33/29	33/29	34/30	
Sound power level	cooling	H/L	dB(A)	55/49	52/*	53/*	60/*	
Piping connections	liquid		mm		ø6.4			
	gas		mm	ø9.5		ø12.7		
	drain	ID	mm	ø21.6		ø25.0		
	(VP 20)	OD	mm	ø27.2		ø32.0		
Heat insulation	Both liquid and gas pipes							
Power supply	V1			1~, 220-240V, 50Hz				
Wired remote control				BRC1D52				
<b>DECORATION PANEL</b>				Not applicable	BYBS45D	BYBS71D		
Dimensions	HxD		mm	Not applicable	55x880x500	55x1,100x500		
Weight			kg	Not applicable	3.5	4.5		
Colour				Not applicable	White			

\* This information was not available at the time of publication.

# FCQ-C

Round flow cassette



## Comfort

- Year round comfort results from 360° radial air discharge with:
  - uniform air flow distribution
  - uniform temperature distribution
- Quiet in operation
- Less draughts and lower air velocities as a result of increased horizontal airflow

## Energy saving

- Highest COP values
- Inverter technology

## Flexible installation

- Very low minimum installation height of 214 mm
- Standard connection to D3-net without the need of an adapter PCB
- Easy condensate drain check

HEAT PUMP (air cooled)				FCQ35C	FCQ50C	FCQ60C				
Dimensions	HxWxD	unit	mm	204x840x840	50x950x950	13.5/8.5				
		decoration panel	mm							
Weight	unit	kg		19	5.5	20.0				
		decoration panel	kg							
Front panel colour				Pure White (RAL 9010)						
Air flow rate	cooling	H/L	m³/min	10.5/8.5	12.5/8.5	13.5/8.5				
	heating	H/L	m³/min	12.5/10.0	12.5/8.5	13.5/8.5				
Fresh Air	max. fresh air intake		%	20.0	20.0	20.0				
	max. fresh air intake		m³/min	2.7	2.7	3.0				
Fan speed				2						
Sound pressure level	cooling	H/L	dB(A)	31/27	31/27	33/28				
	heating	H/L	dB(A)	31/27	31/27	33/28				
Sound power level	cooling	H	dB(A)	49	49	51				
Piping connections	liquid		OD mm	Ø 6.25 (flare connection)						
	gas		OD mm	Ø 9.52 (flare connection)	Ø 12.7 (flare connection)					
	drain (VP25)		ID mm	Ø 25						
			OD mm	Ø 32						
Heat insulation				Foamed Polystyrene / Foamed Polyethylene						
Power supply				1~, 220-240V, 50/60Hz						
Infrared remote control				BRC1D52						

# FFQ-B

4-way blow ceiling mounted cassette  
(600mm x 600mm)



## Comfort

- Automatic air flow director ensures uniform air flow and temperature distribution
- Excellent low draught characteristics and anti-ceiling soiling technology
- Extremely quiet in operation
- Modern style decoration panel in white (RAL9010)

## Energy efficient

- Home leave operation saves energy during absence

## Flexible installation and easy to maintain

- Due to the compact casing, it matches standard architectural modules of 600mm x 600mm, therefore ceiling tile cutting is no longer necessary
- Since the switch box is located inside the unit, it is easy to access from below for maintenance without removing ceiling tiles
- Possibility to shut off one or two flaps for easy installation in corners

HEAT PUMP (air cooled)				FFQ25B	FFQ35B	FFQ50B	FFQ60B			
Dimensions		HxWxD	mm	286x575x575						
Weight		kg		17.5						
Fan speed				2 steps (direct drive)						
Air flow rate	cooling	H/L	m³/min	9/6.5	10/6.5	12/8	15/10			
	heating	H/L	m³/min	9/6.5	10/6.5	12/8	15/10			
Sound pressure level	cooling	H/L	dB(A)	29.5/24.5	32/25	36/27	41/32			
	heating	H/L	dB(A)	29.5/24.5	32/25	36/27	41/32			
Sound power level	cooling	H		46.5	49	53	58			
Piping connections	liquid	mm		ø6.4						
	gas	mm		ø9.5						
	drain	mm		ø20.0						
Heat insulation				Both liquid and gas pipes						
Power supply	V1			1~, 220-240V, 50Hz						
Infrared remote control	cooling only				BRC7E531					
	heat pump				BRC7E530					
Wired remote control				BRC1D52						
<b>DECORATION PANEL</b>				BYFQ60B						
Dimensions	HxWxD	mm		55x700x700						
Weight		kg		2.7						
Colour				White (RAL9010)						

## FHQ-B

Ceiling suspended unit



### Comfort

- Air flow distribution for ceiling heights up to 3.8m without loss of capacity
- A comfortable air flow in all directions thanks to an air flow pattern of 100°

### Flexible installation and easy to maintain

- The ideal solution for installation without false ceiling since they are installed directly against the ceiling
- The reduced lateral servicing space enables the unit to be easily installed in corners and narrow spaces on walls and ceilings

#### HEAT PUMP (air cooled)

			FHQ35B	FHQ50B	FHQ60B
Dimensions	HxDxW	mm	195x960x680		195x1,160x680
Weight		kg	24	25	27
Casing colour				White	
Fan speed		steps		2 steps	
Air flow rate	cooling	H/L	m³/min	13/10	13/10
	heating	H/L	m³/min	13/10	13/10
Sound pressure level	cooling	H/L	dB(A)	37/32	38/33
	heating	H/L	dB(A)	37/32	38/33
Sound power level	cooling	H/L	dB(A)	53/48	54/49
Piping connections	liquid	mm		ø6.4	
	gas	mm	ø9.5		ø12.7
	drain	ID		ø20.0	
	(VP 20)	OD	mm		ø26.0
Heat insulation				Both liquid and gas pipes	
Power supply		V1		1~, 220-240V, 50Hz	
Infrared remote control	cooling only			BRCE66	
	heat pump			BRCE63	
Wired remote control				BRCD52	

# Specifications Outdoor units



## MK/XS-E/F



- The Multi model application saves on outside space. The single outdoor unit can stand in the garden against an outside wall, or on the roof or terrace. Thus only enough space for 1 outdoor unit is required. This is aesthetically pleasing and simplifies installation.
- Daikin outdoor units are neat, sturdy and specially anti-corrosion treated to withstand severe weather conditions. They are fitted with a swing compressor, renowned for its low noise and high energy efficiency. Outdoor units are guaranteed not to disturb the peace and quiet of the neighbourhood.
- Multi inverter controlled outdoor units can operate with 2, 3, 4 or even 5 indoor units.

## MKS-E/F

MULTI - COOLING ONLY			2MKS40F	2MKS50F	3MKS50E	4MKS58E	4MKS75F	5MKS90E
Dimensions	HxWxD	mm	550x765x285		735x936x300		735x936x300	770x900x320
Weight		kg	38	42	49	49	57	69
Casing colour					Ivory white			
Sound pressure level	H/SL	dB(A)	47/43	48/44	46/-	46/-	48/-	48/-
Sound power level	H	dB(A)	62	63	59	59	61	62
Compressor					Hermetically sealed swing type			
Refrigerant type					R-410A			
Amount of additional charge		kg/m	0.02(20m or more)		chargeless	chargeless	chargeless	0.02 (65m or more)
Maximum piping length	for total of each room	m	30		50	50	60	75
	for one room	m	20		25	25	25	25
Maximum level difference	between indoor and outdoor	m	15	15	15	15	15	15
	between indoor units	m	7.5	7.5	15	15	7.5	15
Standard operation range	from~to	°CDB	10~46	10~46	-10~46	-10~46	-10~46	-10~46

## MXS-E/F

MULTI - HEAT PUMP			2MXS40F	2MXS50F	3MXS52E	4MXS68F	4MXS80E	5MXS90E
Dimensions	HxWxD	mm	550x765x285		735x936x300	735x936x300	770x900x320	770x900x320
Weight		kg	38	42	49	58	72	73
Casing colour					Ivory white			
Sound pressure level	cooling	H/SL	dB(A)	47/43	48/44	46/-	48/-	48/-
	heating	H/SL	dB(A)	48/44	50/46	47/-	49/-	52/-
Sound power level	cooling	H	dB(A)	62	63	59	61	66
Compressor					Hermetically sealed swing type			
Refrigerant type					R-410A			
Amount of additional charge		kg/m	0.02(20m or more)	0.02 (30m or more)	0.02 (30m or more)	0.02 (30m or more)	0.02 (30m or more)	0.02 (30m or more)
Maximum piping length	for total of each room	m	30		50	60	70	75
	for one room	m	20		25	25	25	25
Maximum level difference	between indoor and outdoor	m	15		15	15	15	15
	between indoor units	m	7.5		7.5	7.5	7.5	7.5
Standard operation range	cooling	from~to	°CDB	10~46	10~46	-10~46	-10~46	-10~46
	heating	from~to	°CWB	-10~15.5	-15~15.5	-15~15.5	-15~15.5	-15~15.5

# Accessories

## INDOOR UNITS

<b>FTXG-E &amp; CTXG-E</b>	25	35	50
Titanium apatite photocatalytic air purification filter (with frame)		KAF952B41	
Titanium apatite photocatalytic air purification filter (without frame)		KAF952B42	
Anti-theft protection for remote control		KKF917AA4	

<b>FTK/XS-D/F</b>	20	25	35	50
Titanium apatite photocatalytic air purification filter (without frame)		KAF970A46		
Anti-theft protection for remote control		KKF917AA4		

<b>FTXS-C</b>	20	25	35	50	60	71
Air purification filter with photocatalytic deodorising function (with frame)	KAF918A43				-	
Air purification filter with photocatalytic deodorising function (without frame)	KAF918A44				-	
Anti-theft protection for remote control	KKF917AA4			KKF917AA4		
Titanium apatite photocatalytic air purification filter (without frame) (1)		-		KAF952B42		

(1) Standard accessory

<b>FLK/XS-B</b>	25	35	50	60
Photocatalytic deodorising filter (with frame)		KAZ917B41		
Photocatalytic deodorising filter (without frame)		KAZ917B42		
Air purification filter (with frame)		KAF925B41		
Air purification filter (without frame)		KAF925B42		
Anti-theft protection for remote control		KKF917AA4		

<b>FVXS-F</b>	25	35	50
Titanium apatite photocatalytic air-purifying filter without frame(2)		KAF968A42	
Anti-theft protection for remote control		KKF936A4	

(2) Standard accessory

<b>FDK-XS-E/C</b>	25	35	50	60
Anti-theft protection for remote control		KKF917AA4		
Suction grille		KDGF19A45		

<b>FBQ-B</b>	<b>35</b>	<b>50</b>	<b>60</b>
Decoration panel	BYBS45D	BYBS71D	
Service access panel	KTBJ25K56W	KTBJ25K80W	
High-efficiency filter 65% (colorimetric method)*1	KAFJ25L56	KAFJ25L80	
High-efficiency filter 90% (colorimetric method)*1	KAFJ25L56	KAFJ25L80	
Filter chamber for bottom suction	KAJ25L56D	KAJ25L80D	
Filter chamber for rear suction	KAJ25L56B	KAJ25L80B	
Air suction canvas	KSA-25K56	KSA-25KA80	
Blind board/screening door	KBBJ25K56	KBBJ25K80	
Air discharge adapter for round duct	KDAJ25K56	KDAJ25K71	

\*1 If installing a high-efficiency filter on the unit, an assembly chamber for either bottom or rear suction is required.

<b>FCQ-C</b>	<b>35</b>	<b>50</b>	<b>60</b>
Decoration panel	BYCQ140CW1		
Replacement long-life filter	KAFP551KA160		
Fresh air intake kit (min.20% fresh air)	KDDQ55C140		
Sealing member of air discharge outlet	KDBH55C140		

<b>FFQ-B</b>	<b>25</b>	<b>35</b>	<b>50</b>	<b>60</b>
Decoration panel	BYFQ60B			
long-life filter	KAFQ441BA60			
Fresh air intake kit	KDDQ44XA60			
Sealing member of air discharge outlet	KDBH44BA60			
Panel spacer	KDBQ44B60			

<b>FHQ-B</b>	<b>35</b>	<b>50</b>	<b>60</b>
Replacement long-life filter	KAF501DA56		KAFJ501DA80
Drain-up kit	KDU50M60		
L-type piping kit (upward direction)	KHFP5M35		KHFP5M63

## OUTDOOR UNITS

<b>MK/XS-E/F</b>	<b>40 class</b>	<b>50~90 class</b>
Air direction adjustment grille	KPW937A4	KPW945A4
Drain plug (1)	KKP937A4	KKP937A4
(1) standard accessory		

# Control systems

## INDOOR UNITS

FTXG-E & CTXG-E		25	35	50
Wiring adapter for time clock/ remote control (1)	normal open contact normal open pulse contact		KRP413A1S KRP413A1S	
Centralised control board	up to 5 rooms (2)		KRC72	
Central remote control			DCS302C51	
Unified ON/OFF control			DCS301B51	
Schedule timer			DST301B51	
Interface adapter (3)			KRP928A2S	

(1) Wiring adapter is supplied by Daikin. Timer and other devices: field supply.

(2) Wiring adapter is also required for each indoor unit.

(3) For DIII-NET adapter

FTK/XS-D/F		20	25	35	50	60	71
Wiring adapter for time clock/ remote control (1)	normal open contact normal open pulse contact	KRP413A1S		KRP413AA1S			
Centralised control board	up to 5 rooms (2)	KRC72		KRC72A			
Central remote control		DCS302C51		DCS302CA51			
Unified ON/OFF control		DCS301B51		DCS301BA51			
Schedule timer		DST301B51		DST301BA51			
Interface adapter (3)		KRP928A2S		KRP928BA2S			

(1) Wiring adapter is supplied by Daikin. Timer and other devices: field supply.

(2) Wiring adapter is also required for each indoor unit.

(3) For DIII-NET adapter

FTXS-C		20	25	35
Wiring adapter for time clock/ remote control (1)	normal open contact normal open pulse contact	KRP413A1S		
Centralised control board	up to 5 rooms (2)	KRC72		
Central remote control		DCS302C51		
Unified ON/OFF control		DCS301B51		
Schedule timer		DST301B51		
Interface adapter (3)		KRP928A2S		

(1) Wiring adapter is supplied by Daikin. Timer and other devices: field supply.

(2) Wiring adapter is also required for each indoor unit.

(3) For DIII-NET adapter

FLK/XS-B		25	35	50	60
Wiring adapter for time clock/ remote control (1)	normal open contact normal open pulse contact		KRP413A1S		
Centralised control board	up to 5 rooms (2)		KRC72		
Central remote control		DCS302C51			
Unified ON/OFF control		DCS301B51			
Schedule timer		DST301B51			
Interface adapter (3)		KRP928A2S			

(1) Wiring adapter is supplied by Daikin. Timer and other devices: field supply.

(2) Wiring adapter is also required for each indoor unit.

(3) For DIII-NET adapter

<b>FVXS-F</b>		<b>25</b>	<b>35</b>	<b>50</b>
Centralised control board	up to 5 rooms		KRC72(A)	
Wiring adapter normal open/normal open pulse contact)	normal open		KRP413A(A)1S	
	normal open pulse contact		KRP413A(A)1S	
Interface adapter (1)			KRP928B(A)2S	
Central remote control			DCS302CA61	
Unified ON/OFF control			DCS301BA61	
Schedule timer			DST301BA61	

(1) For DIII-NET adapter

<b>FDK/XS-E/C</b>		<b>25</b>	<b>35</b>	<b>50</b>	<b>60</b>
Wiring adapter for time clock/remote control (1)	normal open contact		KRP413A1S		
	normal open pulse contact		KRP413A1S		
Centralised control board	up to 5 rooms (2)		KRC72		
Central remote control			DCS302C51		
Unified ON/OFF control			DCS301B51		
Schedule timer			DST301B51		
Interface adapter (3)			KRP928A2S		

(1) Wiring adapter is supplied by Daikin. Timer and other devices: field supply.

(2) Wiring adapter is also required for each indoor unit.

(3) For DIII-NET adapter

<b>FDBQ-B</b>		<b>25</b>
Wired remote control		BRC1D52
Adapter for wiring (hour meter) (1)		EKRP1B2
Remote ON/OFF, forced OFF		EKRORO

(1) Possibility to connect an hour meter (field supply). This part should not be installed inside the equipment.

<b>FBQ-B</b>		<b>35</b>	<b>50</b>	<b>60</b>
Wired remote control		BRC1D52		
Centralised remote control			DCS302C51	
Unified ON/OFF control			DCS301B51	
Schedule timer			DST301B51	
Adapter for wiring			KRP1B54	
Adapter for external ON/OFF and monitoring			KRP4A51	
Interface adapter for Sky Air			DTA112B51	
Remote ON/OFF, forced OFF			EKRORO	
Option PCB for external electrical heater, humidifier and/or hour meter (1)			EKRP1B2	

(1) Electrical heater, humidifier and hour meter are field supply. These parts should not be installed inside the equipment.

<b>FCQ-C</b>		<b>35</b>	<b>50</b>	<b>60</b>
Wired remote control			BRC1D528	
Infrared remote control	cooling only		BRC7F533F	
	heat pump		BRC7F532F	
Centralised remote control			DCS302CA51	
Unified ON/OFF control			DCS301BA51	
Schedule timer			DST301BA51	
Wiring adapter for electrical appendices			KRP1BA57/KRP4AA53	
Wiring adapter (hour meter)			EKRP1C11	
Installation box for adapter PCB			KRP1H98	
Remote ON/OFF			EKRORO2	
Remote sensor			KRCS01-4	
Fixing box			KJB21AA	

<b>FFQ-B</b>		<b>25</b>	<b>35</b>	<b>50</b>	<b>60</b>
Wired remote control			BRC1D52		
Infrared remote control	cooling only/heat pump		BRC7E531/BRC7E530		
Centralised remote control			DCS302C51		
Unified ON/OFF control			DCS301B51		
Schedule timer			DST301B51		
Adapter for wiring (1)			KRP1B57		
Adapter for external ON/OFF and monitoring (1)			KRP4A53		
Adapter for wiring (hour meter) (2)			EKRP1B2		
Remote sensor			KRCS01-1		
Installation box for adapter PCB			KRP1BA101		
Interface adapter for Sky Air			DTA112B51		
Remote ON/OFF, forced OFF			EKRORO		

(1) Installation box for adapter PCB (KRP1BA101) is necessary.

(2) Possibility to connect an hour meter (field supply). This part should not be installed inside the equipment.

<b>FHQ-B</b>		<b>35</b>	<b>50</b>	<b>60</b>
Wired remote control			BRC1D52	
Infrared remote control	cooling only/heat pump		BRC7E66/BRC7E63	
Centralised remote control			DCS302C51	
Unified ON/OFF control			DCS301B51	
Schedule timer			DST301B51	
Adapter for wiring			KRP1B54	
Adapter for external ON/OFF and monitoring (1)			KRP4A52	
Adapter for wiring (hour meter) (2)			EKRP1B2	
Interface adapter for Sky Air			DTA112B51	
Installation box for adapter PCB			KRP1C93	
Remote ON/OFF, forced OFF			EKRORO	

(1) Installation box for adapter PCB (KRP1C93) is necessary.

(2) Possibility to connect an hour meter (field supply). This part should not be installed inside the equipment.



# CAPACITY AND POWER INPUT

cooling only R-410A  
inverter controlled outdoor units

## COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
2MKS40FV1B	2.0	2.00		---		1.45	2.00	2.40	0.32	0.45	0.59	4.44	A	225
	2.5	2.50		---		1.45	2.50	3.00	0.32	0.62	0.82	4.03	A	310
	3.5	3.50		---		1.45	3.50	4.00	0.32	1.08	1.41	3.24	A	540
	2.0+2.0	2.00		2.00		1.65	4.00	4.10	0.30	1.09	1.13	3.67	A	545
	2.0+2.5	1.85		2.15		1.65	4.00	4.20	0.30	1.08	1.19	3.70	A	540
	2.0+3.5	1.75		2.25		1.65	4.00	4.40	0.30	1.06	1.31	3.77	A	530
	2.5+2.5	2.00		2.00		1.65	4.00	4.30	0.30	1.07	1.24	3.74	A	535
	2.5+3.5	1.80		2.20		1.65	4.00	4.50	0.30	1.05	1.35	3.81	A	525

Note: Connected to 2.0, 2.5, 3.5 class: wall mounted D type

## COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
2MKS40FV1B	2.0	2.00		---		1.45	2.00	2.40	0.32	0.47	0.61	4.26	A	235
	2.5	2.50		---		1.45	2.50	3.00	0.32	0.65	0.86	3.85	A	325
	3.5	3.50		---		1.45	3.50	4.00	0.32	1.14	1.43	3.07	B	570
	2.0+2.0	2.00		2.00		1.65	4.00	4.10	0.30	1.13	1.17	3.54	A	565
	2.0+2.5	1.85		2.15		1.65	4.00	4.20	0.30	1.12	1.21	3.57	A	560
	2.0+3.5	1.75		2.25		1.65	4.00	4.40	0.30	1.10	1.35	3.64	A	550
	2.5+2.5	2.00		2.00		1.65	4.00	4.30	0.30	1.11	1.28	3.60	A	555
	2.5+3.5	1.80		2.20		1.65	4.00	4.50	0.30	1.09	1.41	3.67	A	545

Note: Connected to 2.0, 2.5, 3.5 class: wall mounted C type

## COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
2MKS50FV1B	2.0	2.00		---		1.53	2.00	2.60	0.33	0.47	0.69	4.26	A	235
	2.5	2.50		---		1.53	2.50	3.10	0.33	0.66	0.92	3.79	A	330
	3.5	3.50		---		1.53	3.50	4.00	0.33	1.09	1.42	3.21	A	545
	5.0	5.00		---		1.57	5.00	5.10	0.33	2.06	2.17	2.43	E	1030
	2.0+2.0	2.00		2.00		1.81	4.00	4.90	0.33	1.05	1.53	3.81	A	525
	2.0+2.5	2.00		2.50		1.81	4.50	5.00	0.33	1.29	1.60	3.49	A	645
	2.0+3.5	1.82		3.18		1.81	5.00	5.30	0.33	1.56	1.76	3.21	A	780
	2.0+5.0	1.43		3.57		1.81	5.00	5.40	0.33	1.47	1.72	3.40	A	735
	2.5+2.5	2.50		2.50		1.81	5.00	5.20	0.33	1.56	1.71	3.21	A	780
	2.5+3.5	2.08		2.92		1.81	5.00	5.30	0.33	1.53	1.76	3.27	A	765
	2.5+5.0	1.67		3.33		1.81	5.00	5.40	0.33	1.47	1.73	3.40	A	735
	3.5+3.5	2.50		2.50		1.81	5.00	5.30	0.33	1.50	1.72	3.33	A	750
	3.5+5.0	2.06		2.94		1.81	5.00	5.40	0.33	1.44	1.70	3.47	A	720

Note: Connected to 2.0, 2.5, 3.5, 5.0 kW class: wall mounted D series

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX			
3MKS50E2V1B	2.0	2.00	---	---	---	1.76	2.00	2.89	0.35	0.46	0.74	4.35	A	230
	2.5	2.50	---	---	---	1.76	2.50	3.12	0.35	0.62	0.75	4.03	A	310
	3.5	3.50	---	---	---	1.76	3.50	4.22	0.35	0.96	1.29	3.65	A	480
	2.0+2.0	2.00	2.00	---	---	1.88	4.00	5.96	0.35	0.95	1.91	4.21	A	475
	2.0+2.5	2.00	2.50	---	---	1.88	4.50	6.23	0.35	1.18	2.14	3.81	A	590
	2.0+3.5	1.82	3.18	---	---	1.88	5.00	6.24	0.35	1.45	2.07	3.45	A	725
	2.5+2.5	2.50	2.50	---	---	1.88	5.00	6.23	0.35	1.45	2.14	3.45	A	725
	2.5+3.5	2.08	2.92	---	---	1.88	5.00	6.35	0.35	1.45	2.16	3.45	A	725
	3.5+3.5	2.50	2.50	---	---	1.88	5.00	6.40	0.35	1.39	2.15	3.60	A	695
	2.0+2.0+2.0	1.66	1.66	1.66	---	1.86	4.98	7.04	0.35	1.20	2.16	4.15	A	600
	2.0+2.0+2.5	1.53	1.53	1.92	---	1.86	4.98	7.04	0.35	1.20	2.16	4.15	A	600
	2.0+2.0+3.5	1.33	1.33	2.32	---	1.95	4.98	7.06	0.37	1.20	2.16	4.15	A	600
	2.0+2.5+2.5	1.42	1.78	1.78	---	1.86	4.98	7.04	0.35	1.20	2.16	4.15	A	600
	2.0+2.5+3.5	1.25	1.56	2.19	---	1.95	5.00	7.06	0.37	1.20	2.16	4.17	A	600
	2.0+3.5+3.5	1.12	1.94	1.94	---	1.86	5.00	7.07	0.35	1.20	2.16	4.17	A	600
	2.5+2.5+2.5	1.66	1.66	1.66	---	1.95	4.98	7.04	0.37	1.20	2.16	4.15	A	600
	2.5+2.5+3.5	1.47	1.47	2.06	---	1.95	5.00	7.06	0.37	1.20	2.16	4.17	A	600
	2.5+3.5+3.5	1.32	1.84	1.84	---	1.95	5.00	7.07	0.38	1.20	2.16	4.17	A	600

Note: Connected to 2.0, 2.5, 3.5 class : wall mounted D type

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX			
<b>3MKS50E2V1B</b>	2.0	2.00	---	---	---	1.74	2.00	2.84	0.35	0.46	0.73	435	A	230
	2.5	2.50	---	---	---	1.74	2.50	3.07	0.35	0.64	0.75	391	A	320
	3.5	3.50	---	---	---	1.74	3.50	4.12	0.35	0.99	1.28	354	A	495
	2.0+2.0	2.00	2.00	---	---	1.87	4.00	5.78	0.35	1.00	1.90	4.00	A	500
	2.0+2.5	2.00	2.50	---	---	1.87	4.50	6.06	0.35	1.23	2.23	3.66	A	615
	2.0+3.5	1.82	3.18	---	---	1.87	5.00	6.06	0.35	1.49	2.16	3.36	A	745
	2.5+2.5	2.50	2.50	---	---	1.87	5.00	6.06	0.35	1.54	2.23	3.25	A	770
	2.5+3.5	2.08	2.92	---	---	1.87	5.00	6.06	0.35	1.54	2.23	3.25	A	770
	3.5+3.5	2.50	2.50	---	---	1.87	5.00	6.06	0.35	1.51	2.23	3.31	A	755
	2.0+2.0+2.0	1.66	1.66	1.66	---	1.88	4.98	6.93	0.35	1.23	2.26	4.05	A	615
	2.0+2.0+2.5	1.53	1.53	1.92	---	1.88	4.98	6.93	0.35	1.23	2.26	4.05	A	615
	2.0+2.0+3.5	1.33	1.33	2.32	---	1.97	4.98	6.93	0.37	1.23	2.26	4.05	A	615
	2.0+2.5+2.5	1.42	1.78	1.78	---	1.88	4.98	6.93	0.35	1.23	2.26	4.05	A	615
	2.0+2.5+3.5	1.25	1.56	2.19	---	1.97	5.00	6.93	0.37	1.24	2.26	4.03	A	620
	2.0+3.5+3.5	1.12	1.94	1.94	---	1.88	5.00	6.93	0.35	1.24	2.26	4.03	A	620
	2.5+2.5+2.5	1.66	1.66	1.66	---	1.97	4.98	6.93	0.37	1.23	2.26	4.05	A	615
	2.5+2.5+3.5	1.47	1.47	2.06	---	1.97	5.00	6.93	0.37	1.26	2.26	3.97	A	630
	2.5+3.5+3.5	1.32	1.84	1.84	---	1.97	5.00	6.93	0.38	1.24	2.26	4.03	A	620

Note: Connected to 2.0, 2.5, 3.5 class : wall mounted C type

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX			
<b>4MKS58E2V1B</b>	2.0	2.00	---	---	---	1.76	2.00	2.89	0.35	0.46	0.74	435	A	230
	2.5	2.50	---	---	---	1.76	2.50	3.12	0.35	0.62	0.75	4.03	A	310
	3.5	3.50	---	---	---	1.76	3.50	4.22	0.35	0.96	1.29	3.65	A	480
	5.0	---	---	5.00	---	1.79	5.00	5.40	0.35	1.75	2.03	2.86	C	875
	2.0+2.0	2.00	2.00	---	---	1.88	4.00	5.96	0.35	0.95	1.91	4.21	A	475
	2.0+2.5	2.00	2.50	---	---	1.88	4.50	6.23	0.35	1.18	2.14	3.81	A	590
	2.0+3.5	1.86	3.25	---	---	1.88	5.11	6.24	0.35	1.52	2.14	3.36	A	760
	2.0+5.0	1.56	---	3.90	---	1.88	5.46	6.47	0.35	1.58	2.07	3.46	A	790
	2.5+2.5	2.50	2.50	---	---	1.88	5.00	6.23	0.35	1.45	2.14	3.45	A	725
	2.5+3.5	2.18	3.05	---	---	1.88	5.23	6.35	0.35	1.58	2.16	3.31	A	790
	2.5+5.0	1.86	---	3.71	---	1.88	5.57	6.47	0.35	1.64	2.07	3.40	A	820
	3.5+3.5	2.73	2.73	---	---	1.88	5.46	6.40	0.35	1.70	2.16	3.21	A	850
	3.5+5.0	2.39	---	3.41	---	1.88	5.80	6.49	0.35	1.81	2.09	3.20	A	905
	5.0+5.0	---	---	2.90	2.90	1.89	5.80	6.64	0.35	1.78	2.11	3.26	A	890
	2.0+2.0+2.0	1.74	1.74	1.74	---	1.86	5.22	7.04	0.35	1.26	2.16	4.14	A	630
	2.0+2.0+2.5	1.64	1.64	2.05	---	1.86	5.33	7.04	0.35	1.31	2.16	4.07	A	655
	2.0+2.0+3.5	1.49	1.49	2.60	---	1.95	5.58	7.06	0.37	1.41	2.16	3.96	A	705
	2.0+2.0+5.0	1.29	1.29	3.22	---	1.84	5.80	7.30	0.35	1.56	2.26	3.72	A	780
	2.0+2.5+2.5	1.56	1.95	1.95	---	1.86	5.46	7.04	0.35	1.38	2.16	3.96	A	690
	2.0+2.5+3.5	1.42	1.78	2.49	---	1.95	5.69	7.06	0.37	1.48	2.16	3.84	A	740
	2.0+2.5+5.0	1.22	1.53	3.05	---	1.84	5.80	7.30	0.35	1.56	2.26	3.72	A	780
	2.0+3.5+3.5	1.28	2.26	2.26	---	1.86	5.80	7.07	0.35	1.57	2.16	3.69	A	785
	2.5+2.5+2.5	1.86	1.86	1.86	---	1.95	5.58	7.04	0.37	1.41	2.16	3.96	A	705
	2.5+2.5+3.5	1.71	1.71	2.38	---	1.95	5.80	7.06	0.37	1.57	2.16	3.69	A	785
	2.5+2.5+5.0	1.45	1.45	2.90	---	1.84	5.80	7.30	0.35	1.54	2.26	3.77	A	770
	2.5+3.5+3.5	1.52	2.14	2.14	---	1.95	5.80	7.07	0.38	1.62	2.16	3.58	A	810
	2.0+2.0+2.0+2.0	1.42	1.42	1.42	1.42	1.96	5.68	7.30	0.40	1.49	2.16	3.81	A	745
<b>4MKS58E2V1B</b>	2.0+2.0+2.5+2.5	1.36	1.36	1.36	1.72	1.96	5.80	7.30	0.40	1.52	2.16	3.82	A	760
	2.0+2.0+2.0+3.5	1.22	1.22	1.22	2.14	1.97	5.80	7.30	0.40	1.52	2.16	3.82	A	760
	2.0+2.0+2.5+5.0	1.29	1.29	1.61	1.61	1.96	5.80	7.30	0.40	1.52	2.16	3.82	A	760
	2.0+2.0+2.5+3.5+3.5	1.16	1.16	1.45	2.03	1.99	5.80	7.30	0.40	1.52	2.16	3.82	A	760
	2.0+2.5+2.5+2.5	1.21	1.53	1.53	1.53	1.97	5.80	7.30	0.40	1.52	2.16	3.82	A	760
	2.5+2.5+2.5+2.5	1.45	1.45	1.45	1.45	1.99	5.80	7.30	0.40	1.52	2.16	3.82	A	760

Note: Connected to 2.0, 2.5, 3.5 and 5.0 : wall mounted D type

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX			
<b>4MKS58E2V1B</b>	2.0	2.00	---	---	---	1.74	2.00	2.84	0.35	0.46	0.73	435	A	230
	2.5	2.50	---	---	---	1.74	2.50	3.07	0.35	0.64	0.75	391	A	320
	3.5	3.50	---	---	---	1.74	3.50	4.12	0.35	0.99	1.28	354	A	495
	5.0	---	---	5.00	---	1.85	5.00	5.82	0.35	1.54	1.98	325	A	770
	2.0+2.0	2.00	2.00	---	---	1.87	4.00	5.78	0.35	1.00	1.90	4.00	A	500
	2.0+2.5	2.00	2.50	---	---	1.87	4.50	6.06	0.35	1.23	2.23	3.66	A	615
	2.0+3.5	1.86	3.25	---	---	1.87	5.11	6.24	0.35	1.60	2.16	3.19	B	800
	2.0+5.0	1.56	---	3.90	---	1.88	5.46	6.50	0.35	1.54	2.18	3.55	A	770
	2.5+2.5	2.50	2.50	---	---	1.87	5.00	6.06	0.35	1.54	2.23	3.25	A	770
	2.5+3.5	2.18	3.05	---	---	1.87	5.23	6.06	0.35	1.70	2.23	3.08	B	850
	2.5+5.0	1.86	---	3.71	---	1.88	5.57	6.52	0.35	1.59	2.17	3.50	A	795
	3.5+3.5	2.73	2.73	---	---	1.87	5.46	6.06	0.35	1.83	2.23	2.98	C	915
	3.5+5.0	2.39	---	3.41	---	1.88	5.80	6.52	0.35	1.63	2.16	3.56	A	815
	5.0+5.0	---	---	2.90	2.90	1.83	5.80	7.00	0.35	1.54	2.11	3.77	A	770
	2.0+2.0+2.0	1.74	1.74	1.74	---	1.88	5.22	6.93	0.35	1.35	2.26	3.87	A	675
	2.0+2.0+2.5	1.64	1.64	2.05	---	1.88	5.33	6.93	0.35	1.37	2.26	3.89	A	685
	2.0+2.0+3.5	1.49	1.49	2.60	---	1.97	5.58	6.93	0.37	1.50	2.26	3.72	A	750
	2.0+2.0+5.0</td													

## COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
4MKS58E2V1B	20+20+20+20	1.42	1.42	1.42	1.42	2.04	5.68	7.10	0.40	1.55	2.15	3.66	A	775
	20+20+20+25	1.36	1.36	1.36	1.72	2.04	5.80	7.10	0.40	1.59	2.15	3.65	A	795
	20+20+20+35	1.22	1.22	1.22	2.14	2.06	5.80	7.10	0.40	1.59	2.15	3.65	A	795
	20+20+25+25	1.29	1.29	1.61	1.61	2.04	5.80	7.10	0.40	1.59	2.15	3.65	A	795
	20+20+25+35	1.16	1.16	1.45	2.03	2.07	5.80	7.10	0.40	1.59	2.15	3.65	A	795
	20+25+25+25	1.21	1.53	1.53	1.53	2.06	5.80	7.10	0.40	1.59	2.15	3.65	A	795
	25+25+25+25	1.45	1.45	1.45	1.45	2.07	5.80	7.10	0.40	1.59	2.15	3.65	A	795

Note: Connected to 2.0, 2.5, 3.5 : wall mounted C type / 5.0 : wall mounted E type

## COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)	
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX				
4MKS58E2V1B	2.0	2.00	1.42	---	---	1.76	2.00	2.89	0.35	0.46	0.74	4.35	A	230	
	2.5	2.50	1.36	---	---	1.76	2.50	3.12	0.35	0.62	0.75	4.03	A	310	
	3.5	3.50	1.22	---	---	1.76	3.50	4.22	0.35	0.96	1.29	3.65	A	480	
	5.0	---	1.29	5.00	---	1.85	5.00	5.82	0.35	1.54	1.98	3.25	A	770	
	20+2+20	2.00	1.16	---	---	1.88	4.00	5.96	0.35	0.95	1.91	4.21	A	475	
	20+25	2.00	1.53	---	---	1.88	4.50	6.23	0.35	1.18	2.14	3.81	A	590	
	20+35	1.86	1.45	---	---	1.88	5.11	6.24	0.35	1.52	2.07	3.36	A	760	
	20+50	1.56	---	3.90	---	1.88	5.46	6.91	0.35	1.40	2.07	3.90	A	700	
	25+25	2.50	2.50	---	---	1.88	5.00	6.23	0.35	1.45	2.14	3.45	A	725	
	25+35	2.18	3.05	---	---	1.88	5.23	6.35	0.35	1.58	2.16	3.31	A	790	
	25+50	1.86	---	3.71	---	1.88	5.57	6.91	0.35	1.47	2.07	3.79	A	735	
	35+35	2.73	2.73	---	---	1.88	5.46	6.40	0.35	1.72	2.16	3.17	A	860	
	35+50	2.39	---	3.41	---	1.88	5.80	6.92	0.35	1.60	2.08	3.63	A	800	
	50+50	---	---	2.90	2.90	1.83	5.80	7.00	0.35	1.54	2.11	3.77	A	770	
	20+20+2+20	1.74	1.74	---	---	1.86	5.22	7.04	0.35	1.26	2.16	4.14	A	630	
	20+2+20+25	1.64	1.64	2.05	---	1.86	5.33	7.04	0.35	1.31	2.16	4.07	A	655	
	20+2+35	1.49	1.49	2.60	---	1.95	5.58	7.06	0.37	1.41	2.16	3.96	A	705	
	20+2+50	1.29	1.29	3.22	---	1.77	5.80	7.30	0.35	1.54	2.19	3.77	A	770	
	20+25+25	1.56	1.95	1.95	---	1.86	5.46	7.04	0.35	1.38	2.16	3.96	A	690	
	20+25+35	1.42	1.78	2.49	---	1.95	5.69	7.06	0.37	1.48	2.16	3.84	A	740	
	20+25+50	1.22	1.53	3.05	---	1.77	5.80	7.30	0.35	1.54	2.24	3.77	A	770	
	4MKS58E2V1B	20+35+35	1.28	2.26	2.26	---	1.86	5.80	7.07	0.35	1.57	2.16	3.69	A	785
	25+25+25	1.86	1.86	1.86	---	1.95	5.58	7.04	0.37	1.41	2.16	3.96	A	705	
	25+25+35	1.71	1.71	2.38	---	1.95	5.80	7.06	0.37	1.57	2.16	3.69	A	785	
	25+25+50	1.45	1.45	2.90	---	1.77	5.80	7.30	0.35	1.54	2.24	3.77	A	770	
	25+35+35	1.52	2.14	2.14	---	1.95	5.80	7.07	0.38	1.57	2.16	3.69	A	785	
	20+20+20+20	1.42	1.42	1.42	1.96	1.96	5.68	7.30	0.40	1.49	2.16	3.81	A	745	
	20+20+20+25	1.36	1.36	1.36	1.72	1.96	5.80	7.30	0.40	1.52	2.16	3.82	A	760	
	20+20+20+35	1.22	1.22	1.22	2.14	1.97	5.80	7.30	0.40	1.52	2.16	3.82	A	760	
	20+20+25+25	1.29	1.29	1.61	1.61	1.96	5.80	7.30	0.40	1.52	2.16	3.82	A	760	
	20+20+25+35	1.16	1.16	1.45	2.03	1.99	5.80	7.30	0.40	1.52	2.16	3.82	A	760	
	20+25+25+25	1.21	1.53	1.53	1.53	1.97	5.80	7.30	0.40	1.52	2.16	3.82	A	760	
	25+25+25+25	1.45	1.45	1.45	1.45	1.99	5.80	7.30	0.40	1.52	2.16	3.82	A	760	

Note: Connected to 2.0, 2.5, 3.5 : wall mounted D type / 5.0 : wall mounted E type

## COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
4MKS75F2V1B	2.0	2.00	---	---	---	1.97	2.00	2.98	0.44	0.47	0.71	4.26	A	235
	2.5	2.50	---	---	---	1.97	2.50	3.47	0.44	0.59	0.84	4.24	A	295
	3.5	3.50	---	---	---	1.97	3.50	4.79	0.44	0.9	1.4	3.89	A	450
	5.0	---	---	5.00	---	1.97	5.00	5.95	0.43	1.62	2.05	3.09	B	810
	6.0	---	---	6.00	---	1.98	6.00	6.41	0.41	1.92	2.17	3.13	B	960
	7.1	---	---	7.10	---	1.98	7.10	7.18	0.4	2.77	2.82	2.56	E	1385
	20+2+20	2.00	2.00	---	---	1.98	4.00	5.21	0.39	1.08	1.46	3.70	A	540
	20+25	2.00	2.50	---	---	1.98	4.50	5.66	0.39	1.28	1.68	3.52	A	640
	20+35	2.00	3.50	---	---	1.98	5.50	6.22	0.39	1.76	2.1	3.13	B	880
	20+50	1.93	---	4.82	---	1.98	6.75	7.16	0.37	2.28	2.48	2.96	C	1140
	20+60	1.77	---	5.28	---	1.99	7.05	7.78	0.35	2.2	2.72	3.20	A	1100
	20+7+1	1.62	---	5.76	---	1.99	7.38	7.91	0.42	2.43	2.81	3.04	B	1215
	25+25	2.50	2.50	---	---	1.98	5.00	6.15	0.39	1.44	1.93	3.47	A	720
	25+35	2.50	3.50	---	---	1.98	6.00	6.55	0.39	1.98	2.26	3.03	B	990
	25+50	2.30	---	4.60	---	1.98	6.90	7.33	0.38	2.34	2.62	2.95	C	1170
	25+60	2.12	---	5.08	---	1.99	7.20	7.66	0.35	2.29	2.62	3.14	B	1145
	25+7+1	1.95	---	5.55	---	1.99	7.50	8.02	0.43	2.48	2.91	3.02	B	1240
	35+35	3.50	3.50	---	---	1.98	7.00	7.19	0.39	2.48	2.85	2.82	C	1240
	35+50	2.96	---	4.24	---	1.98	7.20	7.66	0.37	2.6	2.92	2.77	D	1300
	35+60	2.76	---	4.74	---	2.29	7.50	7.96	0.43	2.55	2.86	2.94	C	1275
	35+7+1	2.48	---	5.02	---	2.39	7.50	8.24	0.45	2.48	3.12	3.02	B	1240
	50+50	---	---	3.75	3.75	2.37	7.50	8.11	0.46	2.67	3.22	2.81	C	1335
	50+60	---	---	3.41	4.09	2.50	7.50	8.33	0.46	2.5	3.07	3.00	B	1250
	50+7+1	---	---	3.10	4.40	2.61	7.50	8.51	0.48	2.4	3.22	3.13	B	1200
	60+60	---	---	3.75	3.75	2.65	7.50	8.52	0.47	2.21	2.91	3.39	A	1105
	60+7+1	---	---	3.44	4.06	2.75	7.50	8.60	0.5	2.19	2.96	3.42	A	1095
	20+2+20+20	2.00	2.00	---	---	1.99	6.00	6.78	0.34	1.53	1.8			

## COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
4MKS75F2V1B	25+25+2.5	2.30	2.30	2.30	---	1.99	6.90	7.49	0.34	1.98	2.33	3.48	A	990
	25+25+3.5	2.12	2.12	2.96	---	1.99	7.20	7.88	0.35	2.15	2.62	3.35	A	1075
	25+25+5.0	1.88	1.88	3.74	---	2.42	7.50	8.39	0.43	2.31	2.91	3.25	A	1155
	25+25+6.0	1.70	1.70	4.10	---	2.45	7.50	8.62	0.43	2.05	2.81	3.66	A	1025
	25+25+7.1	1.55	1.55	---	4.40	2.67	7.50	8.89	0.47	2.05	3.01	3.66	A	1025
	25+35+3.5	1.98	2.76	2.76	---	2.31	7.50	8.25	0.41	2.33	2.91	3.22	A	1165
	25+35+5.0	1.70	2.39	3.41	---	2.53	7.50	8.62	0.45	2.28	3.12	3.29	A	1140
	25+35+6.0	1.56	2.19	3.75	---	2.67	7.50	8.87	0.47	2.05	3.01	3.66	A	1025
	25+35+7.1	1.43	2.00	---	4.07	2.78	7.50	9.01	0.5	2.05	3.12	3.66	A	1025
	25+50+5.0	1.50	---	3.00	3.00	2.65	7.50	8.93	0.47	2.17	3.17	3.46	A	1085
	25+50+6.0	1.39	---	2.78	3.33	2.91	7.50	9.03	0.52	2.01	3.01	3.73	A	1005
	35+35+3.5	2.50	2.50	2.50	---	2.41	7.50	8.52	0.44	2.33	3.17	3.22	A	1165
	35+35+5.0	2.19	2.19	3.12	---	2.63	7.50	8.83	0.48	2.26	3.22	3.32	A	1130
	35+35+6.0	2.02	2.02	3.46	---	2.78	7.50	9.00	0.49	2.05	3.12	3.66	A	1025
	35+50+5.0	1.94	---	2.78	2.78	2.76	7.50	9.04	0.5	2.15	3.17	3.49	A	1075
	20+20+20+20	1.76	1.76	1.76	1.76	2.01	7.04	7.83	0.33	1.77	2.14	3.98	A	885
	20+20+20+25	1.69	1.69	1.69	2.13	2.01	7.20	8.06	0.33	1.85	2.27	3.89	A	925
	20+20+20+35	1.58	1.58	1.58	2.76	2.36	7.50	8.29	0.39	1.98	2.44	3.79	A	990
	20+20+20+50	1.36	1.36	1.36	3.42	2.48	7.50	8.79	0.44	1.93	2.71	3.89	A	965
	20+20+20+60	1.25	1.25	1.25	3.75	2.76	7.50	9.13	0.48	1.79	2.65	4.19	A	895
	20+20+20+7.1	1.15	1.15	1.15	4.05	2.88	7.50	9.29	0.51	1.79	2.75	4.19	A	895
	20+20+25+25	1.63	1.63	2.04	2.04	2.01	7.34	8.14	0.33	1.89	2.34	3.88	A	945
	20+20+25+35	1.50	1.50	1.88	2.62	2.36	7.50	8.44	0.39	1.98	2.51	3.79	A	990
	20+20+25+50	1.30	1.30	1.64	3.26	2.49	7.50	8.86	0.44	1.93	2.76	3.89	A	965
	20+20+25+60	1.20	1.20	1.50	3.60	2.76	7.50	9.13	0.48	1.79	2.65	4.19	A	895
	20+20+35+3.5	1.36	1.36	2.39	2.39	2.47	7.50	8.79	0.42	1.98	2.76	3.79	A	990
	20+20+35+5.0	1.20	1.20	2.10	3.00	2.72	7.50	9.20	0.48	1.93	2.96	3.89	A	965
	20+20+35+6.0	1.11	1.11	1.95	3.33	2.88	7.50	9.29	0.51	1.79	2.8	4.19	A	895
	20+25+25+2.5	1.59	1.97	1.97	1.97	2.36	7.50	8.29	0.39	1.98	2.44	3.79	A	990
	20+25+25+3.5	1.43	1.79	1.79	2.49	2.47	7.50	8.58	0.42	1.98	2.61	3.79	A	990
	20+25+25+5.0	1.25	1.56	1.56	3.13	2.60	7.50	9.00	0.46	1.93	2.8	3.89	A	965
	20+25+25+6.0	1.15	1.44	1.44	3.47	2.88	7.50	9.28	0.51	1.79	2.78	4.19	A	895
	20+25+35+3.5	1.30	1.64	2.28	2.28	2.47	7.50	8.92	0.42	1.98	2.86	3.79	A	990
	20+25+35+5.0	1.15	1.44	2.03	2.88	2.83	7.50	9.33	0.5	1.93	3.06	3.89	A	965
	20+35+35+3.5	1.20	2.10	2.10	2.10	2.70	7.50	9.24	0.46	1.98	3.11	3.79	A	990
	25+25+25+2.5	1.87	1.87	1.87	2.36	2.36	7.48	8.44	0.39	1.98	2.51	3.78	A	990
	25+25+25+3.5	1.70	1.70	1.70	2.40	2.47	7.50	8.79	0.42	1.98	2.76	3.79	A	990
	25+25+25+5.0	1.50	1.50	1.50	3.00	2.60	7.50	9.20	0.46	1.93	2.96	3.89	A	965
	25+25+25+6.0	1.39	1.39	1.39	3.33	2.88	7.50	9.28	0.5	1.79	2.75	4.19	A	895
	25+25+35+3.5	1.56	1.56	2.19	2.19	2.59	7.50	9.05	0.43	1.98	2.96	3.79	A	990
	25+25+35+5.0	1.39	1.39	1.94	2.78	2.83	7.50	9.33	0.5	1.93	3.06	3.89	A	965
	25+35+35+3.5	1.44	2.02	2.02	2.02	2.59	7.50	9.24	0.45	1.98	3.11	3.79	A	990

Note: Connected to 2.0, 2.5, 3.5, 5.0 class: wall mounted D type; 6.0, 7.1 class: wall mounted F type

## COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
4MKS75F2V1B	2.0	2.00	---	---	---	1.97	2.00	2.98	0.44	0.47	0.71	4.26	A	235
	2.5	250	---	---	---	1.97	250	3.47	0.44	0.59	0.84	4.24	A	295
	3.5	350	---	---	---	1.97	350	4.79	0.44	0.9	1.4	3.89	A	450
	5.0	---	---	5.00	---	1.97	5.00	5.95	0.41	1.53	1.88	3.27	B	765
	6.0	---	---	6.00	---	1.98	6.00	6.41	0.41	1.92	2.17	3.13	B	960
	7.1	---	---	---	7.10	1.98	7.10	7.18	0.4	2.77	2.82	2.56	E	1385
	20+2.0	2.00	2.00	---	---	1.98	4.00	5.21	0.39	1.08	1.46	3.70	A	540
	20+2.5	2.00	250	---	---	1.98	4.50	5.66	0.39	1.28	1.68	3.52	A	640
	20+3.5	2.00	350	---	---	1.98	5.50	6.22	0.39	1.76	2.1	3.13	B	880
	20+5.0	1.93	---	4.82	---	1.99	6.75	7.20	0.35	2.09	2.29	3.23	A	1045
	20+6.0	1.77	---	5.28	---	1.99	7.05	7.48	0.35	2.2	2.48	3.20	A	1100
	20+7.1	1.62	---	5.76	---	2.29	7.38	7.91	0.42	2.43	2.81	3.04	B	1215
	25+2.5	250	250	---	---	1.98	5.00	6.15	0.39	1.44	1.93	3.47	A	720
	25+3.5	250	350	---	---	1.98	6.00	6.55	0.39	1.98	2.26	3.03	B	990
	25+5.0	230	---	4.60	---	1.99	6.90	7.33	0.36	2.16	2.38	3.19	B	1080
	25+6.0	212	---	5.08	---	1.99	7.20	7.66	0.35	2.29	2.62	3.14	B	1145
	25+7.1	1.95	---	5.55	---	2.29	7.50	8.02	0.43	2.48	2.91	3.02	B	1240
	35+3.5	350	350	---	---	1.98	7.00	7.19	0.39	2.48	2.85	2.82	C	1240
	35+5.0	2.96	---	4.24	---	1.99	7.20	7.64	0.35	2.36	2.62	3.05	B	1180
	35+6.0	2.76	---	4.74	---	2.29	7.50	7.96	0.43	2.55	2.86	2.94	C	1275
	35+7.1	2.48	---	5.02	---	2.39	7.50	8.24	0.45	2.48	3.12	3.02	B	1240
	50+5.0	---	---	3.75	3.75	2.32	7.50	8.09	0.39	2.24	2.61	3.35	A	1120
	50+6.0	---	---	3.41	4.09	2.54	7.50	8.37	0.44	2.3	2.81	3.26	A	1150
	50+7.1	---	---	3.10	4.40	2.64	7.50	8.51	0.46	2.21	2.91	3.39	A	1105
	60+6.0	---	---	3.75	3.75	2.65	7.50	8.52	0.47	2.21	2.91	3.39	A	1105
	60+7.1	---	---	3.44	4.06	2.75	7.50	8.60	0.5	2.19	2.96	3.42	A	1095
	20+2.0+2.0	2.00	2.00	2.00	---	1.99	6.00	6.78	0.34	1.53	1.89	3.92	A	765
	20+2.0+2.5	2.03	2.03	254	---	1.99	6.60	7.07	0.34	1.81	2.07	3.65	A	905
	20+2.0+3.5	1.84	1.84	3.22	---	1.99	6.90	7.50	0.34	1.98	2.33	3.48	A	990
	20+2.0+5.0	1.63	1.63	4.09	---</									

## COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
4MKS75F2V1B	20+35+6.0	1.30	2.29	3.91	---	2.45	7.50	8.75	0.43	2.05	2.91	3.66	A	1025
	20+35+7.1	1.19	2.08	---	4.23	2.68	7.50	8.95	0.47	2.05	3.06	3.66	A	1025
	20+50+5.0	1.24	---	3.13	3.13	2.72	7.50	8.85	0.43	1.87	2.65	4.01	A	935
	20+50+6.0	1.15	---	2.89	3.46	2.85	7.50	9.03	0.48	1.9	2.75	3.95	A	950
	25+25+2.5	2.30	2.30	2.30	---	1.99	6.90	7.49	0.34	1.98	2.33	3.48	A	990
	25+25+3.5	2.12	2.12	2.96	---	1.99	7.20	7.88	0.35	2.15	2.62	3.35	A	1075
	25+25+5.0	1.88	1.88	3.74	---	2.34	7.50	8.40	0.38	2.16	2.66	3.47	A	1080
	25+25+6.0	1.70	1.70	4.10	---	2.45	7.50	8.62	0.43	2.05	2.81	3.66	A	1025
	25+25+7.1	1.55	1.55	---	4.40	2.67	7.50	8.89	0.47	2.05	3.01	3.66	A	1025
	25+35+3.5	1.98	2.76	2.76	---	2.31	7.50	8.25	0.41	2.33	2.91	3.22	A	1165
	25+35+5.0	1.70	2.39	3.41	---	2.56	7.50	8.66	0.43	2.14	2.86	3.50	A	1070
	25+35+6.0	1.56	2.19	3.75	---	2.67	7.50	8.87	0.47	2.05	3.01	3.66	A	1025
	25+35+7.1	1.43	2.00	---	4.07	2.78	7.50	9.01	0.5	2.05	3.12	3.66	A	1025
	25+50+5.0	1.50	---	3.00	3.00	2.72	7.50	8.95	0.43	1.89	2.65	3.97	A	945
	25+50+6.0	1.39	---	2.78	3.33	2.96	7.50	9.03	0.5	1.87	2.75	4.01	A	935
	35+35+3.5	2.50	2.50	2.50	---	2.41	7.50	8.52	0.44	2.33	3.17	3.22	A	1165
	35+35+5.0	2.19	2.19	3.12	---	2.67	7.50	8.88	0.46	2.12	2.96	3.54	A	1060
	35+35+6.0	2.02	2.02	3.46	---	2.67	7.50	9.00	0.46	2.05	3.12	3.66	A	1025
	35+50+5.0	1.94	---	2.78	2.78	2.84	7.50	9.05	0.46	1.87	2.65	4.01	A	935
	20+20+20+2.0	1.76	1.76	1.76	1.76	2.01	7.04	7.83	0.33	1.77	2.14	3.98	A	885
	20+20+20+2.5	1.69	1.69	1.69	2.13	2.01	7.20	8.06	0.33	1.85	2.27	3.89	A	925
	20+20+20+3.5	1.58	1.58	1.58	2.76	2.36	7.50	8.29	0.39	1.98	2.44	3.79	A	990
	20+20+20+5.0	1.36	1.36	1.36	3.42	2.51	7.50	8.80	0.42	1.79	2.5	4.19	A	895
	20+20+20+6.0	1.25	1.25	1.25	3.75	2.76	7.50	9.13	0.48	1.79	2.65	4.19	A	895
	20+20+20+7.1	1.15	1.15	1.15	4.05	2.88	7.50	9.29	0.51	1.79	2.75	4.19	A	895
	20+20+25+2.5	1.63	1.63	2.04	2.04	2.01	7.34	8.14	0.33	1.89	2.34	3.88	A	945
	20+20+25+3.5	1.50	1.50	1.88	2.62	2.36	7.50	8.44	0.39	1.98	2.51	3.79	A	990
	20+20+25+5.0	1.30	1.30	1.64	3.26	2.51	7.50	8.88	0.42	1.79	2.55	4.19	A	895
	20+20+25+6.0	1.20	1.20	1.50	3.60	2.76	7.50	9.13	0.48	1.79	2.65	4.19	A	895
	20+20+35+3.5	1.36	1.36	2.39	2.39	2.47	7.50	8.79	0.42	1.98	2.76	3.79	A	990
	20+20+35+5.0	1.20	1.20	2.10	3.00	2.76	7.50	9.18	0.46	1.79	2.7	4.19	A	895
	20+20+35+6.0	1.11	1.11	1.95	3.33	2.88	7.50	9.29	0.51	1.79	2.8	4.19	A	895
	20+25+25+2.5	1.59	1.97	1.97	1.97	2.36	7.50	8.29	0.39	1.98	2.44	3.79	A	990
	20+25+25+3.5	1.43	1.79	1.79	2.49	2.47	7.50	8.58	0.42	1.98	2.61	3.79	A	990
	20+25+25+5.0	1.25	1.56	1.56	3.13	2.63	7.50	9.03	0.44	1.79	2.6	4.19	A	895
	20+25+25+6.0	1.15	1.44	1.44	3.47	2.88	7.50	9.28	0.51	1.79	2.78	4.19	A	895
	20+25+35+3.5	1.30	1.64	2.28	2.28	2.47	7.50	8.92	0.42	1.98	2.86	3.79	A	990
	20+25+35+5.0	1.15	1.44	2.03	2.88	2.88	7.50	9.32	0.48	1.79	2.8	4.19	A	895
	20+35+35+3.5	1.20	2.10	2.10	2.10	2.70	7.50	9.24	0.46	1.98	3.11	3.79	A	990
	25+25+25+2.5	1.87	1.87	1.87	1.87	2.36	7.48	8.44	0.39	1.98	2.51	3.78	A	990
	25+25+25+3.5	1.70	1.70	1.70	2.40	2.47	7.50	8.79	0.42	1.98	2.76	3.79	A	990
	25+25+25+5.0	1.50	1.50	1.50	3.00	2.63	7.50	9.18	0.44	1.79	2.7	4.19	A	895
	25+25+25+6.0	1.39	1.39	1.39	3.33	2.88	7.50	9.28	0.5	1.79	2.75	4.19	A	895
	25+25+35+3.5	1.56	1.56	2.19	2.19	2.59	7.50	9.05	0.43	1.98	2.96	3.79	A	990
	25+25+35+5.0	1.39	1.39	1.94	2.78	2.88	7.50	9.33	0.48	1.79	2.8	4.19	A	895
	25+35+35+3.5	1.44	2.02	2.02	2.02	2.59	7.50	9.24	0.45	1.98	3.11	3.79	A	990

Note: Connected to 2.0, 2.5, 3.5 class: wall mounted D type; 5.0, 6.0, 7.1 class: wall mounted F type

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)	
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
5MKS90E7V3B	2.0	2.00	---	---	---	---	1.72	2.00	3.03	0.41	0.59	1.05	339	A	295
	2.5	2.50	---	---	---	---	1.79	2.50	3.54	0.45	0.74	1.25	338	A	370
	3.5	3.50	---	---	---	---	1.83	3.50	4.68	0.45	1.17	1.46	299	C	585
	5.0	5.00	---	---	---	---	1.98	5.00	5.65	0.46	1.59	1.83	314	B	795
	6.0	6.00	---	---	---	---	2.08	6.00	6.60	0.43	1.97	2.39	305	B	985
	7.1	7.10	---	---	---	---	2.18	7.10	7.26	0.46	2.66	2.78	267	D	1330
	2.0+2.0	2.00	2.00	---	---	---	1.88	4.00	5.16	0.46	1.17	1.78	342	A	585
	2.0+2.5	2.00	2.50	---	---	---	1.93	4.50	5.57	0.43	1.33	1.78	338	A	665
	2.0+3.5	2.00	3.50	---	---	---	2.03	5.50	6.18	0.43	1.78	2.07	309	B	890
	2.0+5.0	2.00	5.00	---	---	---	2.18	7.00	7.31	0.47	2.32	2.55	302	B	1160
	2.0+6.0	1.86	5.56	---	---	---	2.30	7.42	7.96	0.50	2.55	2.97	291	C	1275
	2.0+7.1	1.71	6.09	---	---	---	2.45	7.80	8.22	0.53	2.85	3.10	274	D	1425
	2.5+2.5	2.50	2.50	---	---	---	1.98	5.00	6.02	0.43	1.42	1.97	352	A	710
	2.5+3.5	2.50	3.50	---	---	---	2.08	6.00	6.60	0.43	1.97	2.33	305	B	985
	2.5+5.0	2.41	4.83	---	---	---	2.24	7.24	7.64	0.47	2.49	2.72	291	C	1245
	2.5+6.0	2.23	5.36	---	---	---	2.37	7.59	8.03	0.50	2.67	2.97	284	C	1335
	2.5+7.1	2.08	5.90	---	---	---	2.51	7.98	8.22	0.53	2.98	3.10	268	D	1490
	3.5+3.5	3.50	3.50	---	---	---	2.18	7.00	7.27	0.46	2.61	2.78	268	D	1305
	3.5+5.0	3.13	4.46	---	---	---	2.37	7.59	8.01	0.50	2.73	2.97	278	D	1365
	3.5+6.0	2.93	5.01	---	---	---	2.50	7.94	8.21	0.53	2.91	3.10	273	D	1455
	3.5+7.1	2.75	5.58	---	---	---	2.64	8.33	8.41	0.57	3.24	3.29	257	E	1620
	5.0+5.0	4.06	4.06	---	---	---	2.57	8.12	8.76	0.54	2.72	3.18	299	C	1360
	5.0+6.0	3.85	4.62	---	---	---	2.70	8.47	8.79	0.57	2.98	3.19	284	C	1490
	5.0+7.1	3.66	5.20	---	---	---	2.84	8.86							

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
SMKS90E7V3B	2.0+2.0+6.0	1.62	1.62	4.88	---	---	2.57	8.12	8.84	0.54	2.73	3.19	2.97	C	1365
	2.0+2.0+7.1	1.53	1.53	5.45	---	---	2.71	8.51	9.03	0.57	2.99	3.34	2.85	C	1495
	2.0+2.5+2.5	2.00	2.50	2.50	---	---	2.18	7.00	7.31	0.47	2.32	2.49	3.02	B	1160
	2.0+2.5+3.5	1.86	2.32	3.24	---	---	2.30	7.42	7.96	0.50	2.55	2.91	2.91	C	1275
	2.0+2.5+5.0	1.67	2.09	4.18	---	---	2.50	7.94	8.78	0.54	2.60	3.19	3.05	B	1300
	2.0+2.5+6.0	1.58	1.98	4.74	---	---	2.63	8.30	8.84	0.54	2.86	3.19	2.90	C	1430
	2.0+2.5+7.1	1.50	1.87	5.31	---	---	2.78	8.68	9.03	0.57	3.13	3.34	2.77	D	1565
	2.0+3.5+3.5	1.73	3.02	3.02	---	---	2.43	7.77	8.23	0.53	2.79	3.11	2.78	D	1395
	2.0+3.5+5.0	1.58	2.77	3.95	---	---	2.63	8.30	8.81	0.54	2.86	3.19	2.90	C	1430
	2.0+3.5+6.0	1.50	2.63	4.52	---	---	2.76	8.65	9.02	0.57	3.06	3.33	2.88	C	1530
	2.0+3.5+7.1	1.43	2.50	5.07	---	---	2.91	9.00	9.04	0.60	3.34	3.39	2.69	D	1670
	2.0+5.0+5.0	1.46	3.68	3.68	---	---	2.83	8.82	9.57	0.58	2.85	3.42	3.09	B	1425
	2.0+5.0+6.0	1.39	3.46	4.15	---	---	2.96	9.00	9.61	0.61	2.92	3.42	3.08	B	1460
	2.0+5.0+7.1	1.28	3.19	4.53	---	---	3.10	9.00	9.63	0.64	2.86	3.43	3.15	B	1430
	2.0+6.0+6.0	1.28	3.86	3.86	---	---	3.09	9.00	9.64	0.64	2.86	3.43	3.15	B	1430
	2.0+6.0+7.1	1.19	3.58	4.23	---	---	3.23	9.00	10.10	0.64	2.79	3.97	3.23	A	1395
	2.5+2.5+2.5	2.41	2.41	2.41	---	---	2.24	7.23	7.64	0.47	2.43	2.73	2.98	C	1215
	2.5+2.5+3.5	2.23	2.23	3.13	---	---	2.37	7.59	8.05	0.50	2.67	2.98	2.84	C	1335
	2.5+2.5+5.0	2.03	2.03	4.06	---	---	2.57	8.12	8.80	0.54	2.73	3.19	2.97	C	1365
	2.5+2.5+6.0	1.93	1.93	4.61	---	---	2.70	8.47	8.84	0.57	2.92	3.19	2.90	C	1460
	2.5+2.5+7.1	1.83	1.83	5.20	---	---	2.84	8.86	9.03	0.60	3.27	3.34	2.71	D	1635
	2.5+3.5+3.5	2.08	2.93	2.93	---	---	2.50	7.94	8.23	0.53	2.92	3.11	2.72	D	1460
	2.5+3.5+5.0	1.93	2.70	3.84	---	---	2.70	8.47	8.81	0.57	2.99	3.19	2.88	C	1495
	2.5+3.5+6.0	1.84	2.57	4.41	---	---	2.83	8.82	9.02	0.60	3.19	3.33	2.76	D	1595
	2.5+3.5+7.1	1.72	2.40	4.88	---	---	2.97	9.00	9.04	0.60	3.34	3.39	2.69	D	1670
	2.5+5.0+5.0	1.80	3.60	3.60	---	---	2.89	9.00	9.57	0.61	2.99	3.42	3.01	B	1495
SMKS90E7V3B	2.5+5.0+6.0	1.67	3.33	4.00	---	---	3.02	9.00	9.61	0.61	2.99	3.42	3.01	B	1495
	2.5+5.0+7.1	1.54	3.08	4.38	---	---	3.17	9.00	9.63	0.64	2.92	3.43	3.08	B	1460
	2.5+6.0+6.0	1.56	3.72	3.72	---	---	3.16	9.00	9.64	0.64	2.93	3.43	3.07	B	1465
	2.5+6.0+7.1	1.44	3.46	4.10	---	---	3.30	9.00	10.10	0.67	2.86	3.97	3.15	B	1430
	3.5+3.5+3.5	2.77	2.77	2.77	---	---	2.63	8.31	8.35	0.57	3.17	3.24	2.62	D	1585
	3.5+3.5+5.0	2.57	2.57	3.68	---	---	2.83	8.82	8.99	0.60	3.26	3.33	2.71	D	1630
	3.5+3.5+6.0	2.42	2.42	4.16	---	---	2.96	9.00	9.03	0.60	3.26	3.33	2.76	D	1630
	3.5+3.5+7.1	2.23	2.23	4.54	---	---	3.10	9.00	9.05	0.64	3.20	3.34	2.81	C	1600
	3.5+5.0+5.0	2.34	3.33	3.33	---	---	3.02	9.00	9.58	0.61	2.99	3.42	3.01	B	1495
	3.5+5.0+6.0	2.18	3.10	3.72	---	---	3.16	9.00	9.62	0.64	2.99	3.43	3.01	B	1495
	3.5+5.0+7.1	2.02	2.88	4.10	---	---	3.30	9.00	10.07	0.67	2.93	3.97	3.07	B	1465
	3.5+6.0+6.0	2.04	3.48	3.48	---	---	3.29	9.00	10.08	0.67	2.93	3.97	3.07	B	1465
	5.0+5.0+5.0	3.00	3.00	3.00	---	---	3.22	9.00	10.45	0.64	2.70	3.83	3.33	A	1350
	2.0+2.0+2.0+2.0	1.86	1.86	1.86	1.86	---	2.30	7.44	7.96	0.51	2.13	2.42	3.49	A	1065
	2.0+2.0+2.0+2.5	1.79	1.79	2.22	---	---	2.37	7.59	8.25	0.51	2.25	2.61	3.37	A	1125
	2.0+2.0+2.5+3.5	1.67	1.67	1.67	2.93	---	2.50	7.94	8.78	0.54	2.42	2.99	3.28	A	1210
	2.0+2.0+2.0+5.0	1.54	1.54	1.54	3.85	---	2.70	8.47	9.44	0.55	2.59	3.28	3.27	A	1295
	2.0+2.0+2.0+6.0	1.47	1.47	1.47	4.41	---	2.83	8.82	9.65	0.58	2.86	3.43	3.08	B	1430
	2.0+2.0+2.0+7.1	1.37	1.37	1.37	4.89	---	2.97	9.00	9.68	0.61	2.93	3.44	3.07	B	1465
	2.0+2.0+2.5+2.5	1.73	1.73	2.16	2.16	---	2.43	7.78	8.53	0.51	2.30	2.79	3.38	A	1150
	2.0+2.0+2.5+3.5	1.62	1.62	2.03	2.85	---	2.57	8.12	8.86	0.54	2.67	3.20	3.04	B	1335
	2.0+2.0+2.5+5.0	1.50	1.50	1.88	3.77	---	2.76	8.65	9.62	0.58	2.72	3.43	3.18	B	1360
	2.0+2.0+2.5+6.0	1.44	1.44	1.80	4.32	---	2.89	9.00	9.65	0.58	3.00	3.43	3.00	C	1500
	2.0+2.0+2.5+7.1	1.32	1.32	1.65	4.71	---	3.04	9.00	9.68	0.61	2.93	3.44	3.07	B	1465
	2.0+2.0+3.5+3.5	1.54	1.54	2.70	2.70	---	2.70	8.48	8.86	0.57	2.93	3.20	2.89	C	1465
	2.0+2.0+3.5+5.0	1.44	1.44	2.52	3.60	---	2.89	9.00	9.63	0.58	2.99	3.43	3.01	B	1495
	2.0+2.0+3.5+6.0	1.33	1.33	2.34	4.00	---	3.02	9.00	9.66	0.61	2.86	3.43	3.15	B	1430
	2.0+2.0+3.5+7.1	1.23	1.23	2.16	4.38	---	3.17	9.00	9.68	0.64	2.79	3.44	3.23	A	1395
	2.0+2.0+5.0+5.0	1.29	1.29	3.21	3.21	---	3.09	9.00	10.22	0.61	2.64	3.52	3.41	A	1320
	2.0+2.0+5.0+6.0	1.20	1.20	3.00	3.60	---	3.22	9.00	10.45	0.64	2.64	3.77	3.41	A	1320
	2.0+2.5+2.5+2.5	1.67	2.09	2.09	2.09	---	2.50	7.94	8.78	0.54	2.42	2.99	3.28	A	1210
	2.0+2.5+2.5+3.5	1.57	1.98	1.98	2.77	---	2.63	8.30	8.86	0.54	2.80	3.20	2.96	C	1400
SMKS90E7V3B	2.0+2.5+2.5+5.0	1.46	1.84	1.84	3.68	---	2.83	8.82	9.62	0.58	2.86	3.43	3.08	B	1430
	2.0+2.5+2.5+6.0	1.39	1.73	1.73	4.15	---	2.96	9.00	9.65	0.61	2.93	3.43	3.07	B	1465
	2.0+2.5+2.5+7.1	1.27	1.60	1.60	4.53	---	3.10	9.00	9.68	0.64	2.79	3.44	3.23	A	1395
	2.0+2.5+3.5+3.5	1.50	1.89	2.63	2.63	---	2.76	8.65	9.04	0.57	3.06	3.34	2.88	C	1530
	2.0+2.5+3.5+5.0	1.39	1.73	2.42	3.46	---	2.96	9.00	9.63	0.61	2.99	3.43	3.01	B	1495
	2.0+2.5+3.5+6.0	1.28	1.61	2.25	3.86	---	3.09	9.00	9.66	0.64	2.86	3.43	3.15	B	1430
	2.0+2.5+3.5+7.1	1.19	1.49	2.09	4.23	---	3.23	9.00	10.12	0.64	2.79	3.98	3.23	A	1395
	2.0+2.5+5.0+5.0	1.25	1.55	3.10	3.10	---	3.16	9.00	10.22	0.61	2.64	3.52	3.41	A	1320
	2.0+2.5+5.0+6.0	1.17	1.45	2.90	3.48	---	3.29	9.00	10.49	0.64	2.64	3.77	3.41	A	1320
	2.0+2.5+5.0+7.1	1.44	2.52	2.52	2.52	---	2.89	9.00	9.05	0.60	3.34	3.39	2.69	D	1670
	2.0+2.5+5.0+8.0	1.25	2.25	2.25	3.21	---	3.09	9.00	9.63	0.64	2.99	3.43	3.01	B	1495
	2.0+2.5+5.0+9.0	1.20	2.10	2.10	3.60	---	3.22	9.00	10.10	0.64	2.86	3.97	3.15	B	1430
	2.0+2.5+5.0+10.0	1.17	2.03	2.90	2.90	---	3.29	9.00	10.49	0.64	2.64	3.84	3.41	A</td	

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
SMKS90E7V3B	2.0+2.0+2.0+2.0+2.0	1.63	1.63	1.63	1.63	1.63	2.57	8.15	9.03	0.55	240	3.00	3.40	A	1200
	2.0+2.0+2.0+2.0+2.5	1.58	1.58	1.58	1.58	1.98	2.63	8.30	9.25	0.55	247	3.14	3.36	A	1235
	2.0+2.0+2.0+2.0+3.5	1.50	1.50	1.50	1.50	2.65	2.76	8.65	9.64	0.58	273	3.43	3.17	B	1365
	2.0+2.0+2.0+2.0+5.0	1.38	1.38	1.38	1.38	3.48	2.96	9.00	10.09	0.58	264	3.45	3.41	A	1320
	2.0+2.0+2.0+2.0+6.0	1.29	1.29	1.29	1.29	3.84	3.09	9.00	10.30	0.61	268	3.53	3.36	A	1340
	2.0+2.0+2.0+2.0+7.1	1.19	1.19	1.19	1.19	4.24	3.23	9.00	10.46	0.64	258	3.70	3.49	A	1290
	2.0+2.0+2.0+2.5+2.5	1.54	1.54	1.54	1.92	1.92	2.70	8.46	9.45	0.55	259	3.29	3.27	A	1295
	2.0+2.0+2.0+2.5+3.5	1.47	1.47	1.47	1.84	2.57	2.83	8.82	9.67	0.58	279	3.43	3.16	B	1395
	2.0+2.0+2.0+2.5+5.0	1.33	1.33	1.33	1.67	3.34	3.02	9.00	10.21	0.61	264	3.53	3.41	A	1320
	2.0+2.0+2.0+2.5+6.0	1.24	1.24	1.24	1.55	3.73	3.16	9.00	10.30	0.61	268	3.53	3.36	A	1340
	2.0+2.0+2.0+2.5+7.1	1.15	1.15	1.15	1.44	4.11	3.30	9.00	10.50	0.64	258	3.70	3.49	A	1290
	2.0+2.0+2.0+3.5+3.5	1.54	1.54	1.54	1.92	1.92	2.70	8.46	9.45	0.55	259	3.29	3.27	A	1295
	2.0+2.0+2.0+3.5+5.0	1.24	1.24	1.24	2.17	3.11	3.16	9.00	10.27	0.61	268	3.53	3.36	A	1340
	2.0+2.0+2.0+3.5+6.0	1.16	1.16	1.16	2.03	3.49	3.29	9.00	10.49	0.64	265	3.69	3.40	A	1325
	2.0+2.0+2.5+2.5+2.5	1.51	1.51	1.88	1.88	1.88	2.76	8.66	9.64	0.58	273	3.43	3.17	B	1365
	2.0+2.0+2.5+2.5+3.5	1.44	1.44	1.80	1.80	2.52	2.89	9.00	9.67	0.58	293	3.43	3.07	B	1465
	2.0+2.0+2.5+2.5+5.0	1.29	1.29	1.61	1.61	3.20	3.09	9.00	10.26	0.61	264	3.53	3.41	A	1320
	2.0+2.0+2.5+2.5+6.0	1.20	1.20	1.50	1.50	3.60	3.22	9.00	10.45	0.64	264	3.69	3.41	A	1320
	2.0+2.0+2.5+3.5+3.5	1.33	1.33	1.68	2.33	2.33	3.02	9.00	9.68	0.61	293	3.44	3.07	B	1465
	2.0+2.0+2.5+3.5+5.0	1.20	1.20	1.50	2.10	3.00	3.22	9.00	10.45	0.64	264	3.69	3.41	A	1320
	2.0+2.0+3.5+3.5+3.5	1.23	1.23	2.18	2.18	2.18	3.16	9.00	9.69	0.64	293	3.44	3.07	B	1465
	2.0+2.5+2.5+2.5+2.5	1.46	1.84	1.84	1.84	1.84	2.83	8.82	9.67	0.58	286	3.43	3.08	B	1430
	2.0+2.5+2.5+2.5+3.5	1.39	1.73	1.73	1.73	2.42	2.96	9.00	9.67	0.61	293	3.43	3.07	B	1465
	2.0+2.5+2.5+2.5+5.0	1.25	1.55	1.55	1.55	3.10	3.16	9.00	10.26	0.61	264	3.53	3.41	A	1320
	2.0+2.5+2.5+2.5+6.0	1.17	1.45	1.45	1.45	3.48	3.29	9.00	10.49	0.64	264	3.77	3.41	A	1320
	2.0+2.5+2.5+3.5+3.5	1.28	1.61	2.25	2.25	3.09	9.00	9.68	0.64	293	3.44	3.07	B	1465	

Note: Connected to 2.0, 2.5, 3.5: wall mounted D type / 5.0, 6.0, 7.1 : wall mounted E type

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
SMKS90E7V3B	2.0	2.00	---	---	---	---	1.72	2.00	3.03	0.41	059	1.05	339	A	295
	2.5	2.50	---	---	---	---	1.79	2.50	3.54	0.45	074	1.25	338	A	370
	3.5	3.50	---	---	---	---	1.83	3.50	4.66	0.45	1.17	1.45	299	C	585
	5.0	5.00	---	---	---	---	1.98	5.00	5.65	0.46	159	1.78	314	B	795
	6.0	6.00	---	---	---	---	2.08	6.00	6.60	0.43	1.97	2.39	305	B	985
	7.1	7.10	---	---	---	---	2.18	7.10	7.26	0.46	2.66	2.78	267	D	1330
	2.0+2.0	2.00	2.00	---	---	---	1.88	4.00	5.12	0.46	1.21	1.78	331	A	605
	2.0+2.5	2.00	2.50	---	---	---	1.93	4.50	5.53	0.42	1.37	1.78	328	A	685
	2.0+3.5	2.00	3.50	---	---	---	2.03	5.50	6.13	0.42	1.78	2.07	309	B	890
	2.0+5.0	2.00	5.00	---	---	---	2.18	7.00	7.31	0.47	2.32	2.54	302	B	1160
	2.0+6.0	1.86	5.56	---	---	---	2.30	7.42	7.96	0.50	2.61	2.97	284	C	1305
	2.0+7.1	1.71	6.09	---	---	---	2.45	7.80	8.20	0.53	2.85	3.10	274	D	1425
	2.5+2.5	250	250	---	---	---	1.98	5.00	5.98	0.42	1.46	1.97	342	A	730
	2.5+3.5	250	3.50	---	---	---	2.08	6.00	6.60	0.42	2.02	2.38	297	C	1010
	2.5+5.0	241	4.83	---	---	---	2.24	7.24	7.64	0.47	2.49	2.78	291	C	1245
	2.5+6.0	223	5.36	---	---	---	2.37	7.59	8.01	0.50	2.73	2.97	278	D	1365
	2.5+7.1	208	5.90	---	---	---	2.51	7.98	8.20	0.53	2.97	3.10	269	D	1485
	3.5+3.5	350	3.50	---	---	---	2.18	7.00	7.21	0.46	2.66	2.77	263	D	1330
	3.5+5.0	313	4.46	---	---	---	2.37	7.59	7.97	0.50	2.72	2.97	279	D	1360
	3.5+6.0	293	5.01	---	---	---	2.50	7.94	8.18	0.53	2.97	3.10	267	D	1485
	3.5+7.1	275	5.58	---	---	---	2.64	8.33	8.20	0.57	3.23	3.10	258	E	1615
	5.0+5.0	4.06	4.06	---	---	---	2.57	8.12	8.76	0.54	2.72	3.18	299	C	1360
	5.0+6.0	3.85	4.62	---	---	---	2.70	8.47	8.79	0.57	2.98	3.19	284	C	1490
	5.0+7.1	3.66	5.20	---	---	---	2.84	8.86	8.99	0.60	3.26	3.33	272	D	1630
	6.0+6.0	4.41	4.41	---	---	---	2.83	8.82	9.00	0.60	3.19	3.33	276	D	1595
	6.0+7.1	4.12	4.88	---	---	---	2.97	9.00	9.02	0.64	3.26	3.33	276	D	1630
	7.1+7.1	450	450	---	---	---	3.12	9.00	9.04	0.64	3.20	3.34	281	C	1600
	2.0+2.0+2.0	2.00	2.00	---	---	---	2.08	6.00	6.63	0.47	1.74	2.10	345	A	870
	2.0+2.0+2.5	2.00	2.00	2.50	---	---	2.13	6.50	6.97	0.47	2.05	2.32	317	B	1025
	2.0+2.0+3.5	1.93	1.93	3.38	---	---	2.24	7.24	7.64	0.47	2.49	2.78	291	C	1245
	2.0+2.0+5.0	1.72	1.72	4.33	---	---	2.43	7.77	8.53	0.51	2.54	3.05	306	B	1270
	2.0+2.0+6.0	1.62	1.62	4.88	---	---	2.57	8.12	8.79	0.54	2.72	3.19	299	C	1360
	2.0+2.0+7.1	1.53	1.53	5.45	---	---	2.71	8.51	8.98	0.57	2.99	3.33	285	C	1495
	2.0+2.5+2.5	2.00	2.50	2.50	---	---	2.18	7.00	7.31	0.47	2.32	2.54	302	B	1160
	2.0+2.5+3.5	1.86	2.32	3.24	---	---	2.30	7.42	7.96	0.50	2.60	2.97	285	C	1300
	2.0+2.5+5.0	1.67	2.09	4.18	---	---	2.50	7.94	8.75	0.54	2.66	3.18	298	C	1330
	2.0+2.5+6.0	1.58	1.98	4.74	---	---	2.63	8.30	8.79	0.54	2.85	3.19	291	C	1425
	2.0+2.5+7.1	1.50	1.87	5.31	---	---	2.78	8.68	8.98	0.57	3.12	3.33	278	D	1560
	2.0+3.5+3.5	1.73	3.02	3.02	---	---	2.43	7.77	8.14	0.53	2.84	3.09	274	D	1420
	2.0+3.5+5.0	1.58	2.77	3.95	---	---	2.63	8.30	8.75	0.57	2.85	3.18	291	C	1425
	2.0+3.5+6.0	1.50	2.63	4.											

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
SMKS90E7V3B	25+25+25	241	241	241	---	---	224	723	764	047	249	278	2.90	C	1245
	25+25+3.5	223	223	3.13	---	---	237	759	797	050	272	297	2.79	D	1360
	25+25+5.0	203	203	4.06	---	---	257	812	875	054	272	318	2.99	C	1360
	25+25+6.0	193	193	4.61	---	---	270	847	879	057	298	319	2.84	C	1490
	25+25+7.1	183	183	5.20	---	---	284	886	898	060	326	333	2.72	D	1630
	25+35+3.5	208	293	2.93	---	---	250	794	814	053	297	309	2.67	D	1485
	25+35+5.0	193	2.70	3.84	---	---	270	847	875	057	298	318	2.84	C	1490
	25+35+6.0	184	2.57	4.41	---	---	283	882	896	060	325	332	2.71	D	1625
	25+35+7.1	172	2.40	4.88	---	---	297	900	898	064	340	333	2.65	D	1700
	25+50+5.0	180	3.60	3.60	---	---	289	900	955	061	305	342	2.95	C	1525
	25+50+6.0	167	3.33	4.00	---	---	302	900	958	061	299	342	3.01	B	1495
	25+50+7.1	154	3.08	4.38	---	---	317	900	960	064	292	342	3.08	B	1460
	25+60+6.0	156	3.72	3.72	---	---	316	900	962	064	292	343	3.08	B	1460
	25+60+7.1	144	3.46	4.10	---	---	330	900	1007	067	286	397	3.15	B	1430
	35+35+3.5	277	2.77	2.77	---	---	263	831	826	056	329	322	2.53	E	1645
	35+35+5.0	257	257	3.68	---	---	283	882	893	060	325	332	2.71	D	1625
	35+35+6.0	242	242	4.16	---	---	296	900	896	064	332	332	2.71	D	1660
	35+35+7.1	223	223	454	---	---	310	900	898	064	326	333	2.76	D	1630
	35+50+5.0	234	3.33	3.33	---	---	302	900	955	061	305	342	2.95	C	1525
	35+50+6.0	218	3.10	3.72	---	---	316	900	958	064	299	342	3.01	B	1495
	35+50+7.1	202	2.88	4.10	---	---	330	900	1004	067	292	396	3.08	B	1460
	35+60+6.0	204	3.48	3.48	---	---	329	900	1005	067	292	396	3.08	B	1460
	50+50+5.0	300	3.00	3.00	---	---	322	900	1045	064	270	383	3.33	A	1350
	20+20+20+2.0	186	1.86	1.86	1.86	---	230	744	796	051	218	248	3.41	A	1090
	20+20+20+2.5	179	1.79	1.79	2.22	---	237	759	825	051	224	266	3.39	A	1120
	20+20+20+3.5	167	1.67	1.67	2.93	---	250	794	878	054	248	305	3.20	A	1240
SMKS90E7V3B	20+20+20+5.0	154	1.54	1.54	3.85	---	270	847	936	058	265	327	3.20	B	1325
	20+20+20+6.0	147	1.47	1.47	4.41	---	283	882	958	058	285	342	3.09	B	1425
	20+20+20+7.1	137	1.37	1.37	4.89	---	297	900	960	061	299	342	3.01	B	1495
	20+20+25+2.5	173	1.73	2.16	2.16	---	243	778	853	051	236	285	3.30	A	1180
	20+20+25+3.5	162	1.62	2.03	2.85	---	257	812	875	054	272	318	2.99	C	1360
	20+20+25+5.0	150	1.50	1.88	3.77	---	276	865	954	058	278	341	3.11	B	1390
	20+20+25+6.0	144	1.44	1.80	4.32	---	289	900	958	061	299	342	3.01	B	1495
	20+20+25+7.1	132	1.32	1.65	4.71	---	304	900	960	061	299	342	3.01	B	1495
	20+20+35+3.5	154	1.54	2.70	2.70	---	270	848	875	057	298	318	2.85	C	1490
	20+20+35+5.0	144	1.44	2.52	3.60	---	289	900	954	061	305	341	2.95	C	1525
	20+20+35+6.0	133	1.33	2.34	4.00	---	302	900	958	061	292	342	3.08	B	1460
	20+20+35+7.1	123	1.23	2.16	4.38	---	317	900	960	064	285	342	3.16	B	1425
	20+20+50+5.0	129	1.29	3.21	3.21	---	309	900	1017	061	270	351	3.33	A	1350
	20+20+50+6.0	120	1.20	3.00	3.60	---	322	900	1045	064	264	384	3.41	A	1320
	20+25+25+2.5	167	2.09	2.09	2.09	---	250	794	878	054	248	305	3.20	A	1240
	20+25+25+3.5	157	1.98	1.98	2.77	---	263	830	875	057	285	318	2.91	C	1425
	20+25+25+5.0	146	1.84	1.84	3.68	---	283	882	954	058	292	341	3.02	B	1460
	20+25+25+6.0	139	1.73	1.73	4.15	---	296	900	958	061	292	342	3.08	B	1460
	20+25+25+7.1	127	1.60	1.60	4.53	---	310	900	960	064	285	342	3.16	B	1425
	20+25+35+3.5	150	1.89	2.63	2.63	---	276	865	892	057	311	332	2.78	D	1555
	20+25+35+5.0	139	1.73	2.42	3.46	---	296	900	954	061	305	341	2.95	C	1525
	20+25+35+6.0	128	1.61	2.25	3.86	---	309	900	958	064	292	342	3.08	B	1460
	20+25+35+7.1	119	1.49	2.09	4.23	---	323	900	1003	064	285	396	3.16	B	1425
	20+25+50+5.0	125	1.55	3.10	3.10	---	316	900	1017	061	270	351	3.33	A	1350
	20+25+50+6.0	117	1.45	2.90	3.48	---	329	900	1049	064	264	384	3.41	A	1320
	20+35+35+3.5	144	2.52	2.52	2.52	---	289	900	892	060	339	332	2.65	D	1695
	20+35+35+5.0	129	2.25	2.25	3.21	---	309	900	954	064	305	341	2.95	C	1525
	20+35+35+6.0	120	2.10	2.10	3.60	---	322	900	1001	064	292	395	3.08	B	1460
	20+35+50+5.0	117	2.03	2.90	2.90	---	329	900	1049	064	270	391	3.33	A	1350
	20+25+25+2.5	203	2.03	2.03	2.03	---	257	812	875	054	272	318	2.99	C	1360
	20+25+25+3.5	193	1.93	1.93	2.68	---	270	847	875	057	298	318	2.84	C	1490
	20+25+25+5.0	180	1.80	1.80	3.60	---	289	900	954	061	305	341	2.95	C	1525
SMKS90E7V3B	25+25+25+6.0	167	1.67	1.67	3.99	---	302	900	958	061	292	342	3.08	B	1460
	25+25+25+7.1	154	1.54	1.54	4.38	---	317	900	960	064	285	342	3.16	B	1425
	25+25+35+3.5	184	1.84	2.57	2.57	---	283	882	892	060	325	332	2.71	D	1625
	25+25+35+5.0	167	1.67	2.33	3.33	---	302	900	954	061	305	341	2.95	C	1525
	25+25+35+6.5	155	1.55	2.18	3.72	---	316	900	958	064	292	342	3.08	B	1460
	25+25+35+7.1	144	1.44	2.02	4.10	---	330	900	1003	067	285	396	3.16	B	1425
	25+25+50+5.0	150	1.50	3.00	3.00	---	322	900	1045	064	270	383	3.33	A	1350
	25+35+35+3.5	174	2.42	2.42	2.42	---	296	900	894	064	339	332	2.65	D	1695
	25+35+35+5.0	156	2.17	2.17	3.10	---	316	900	954	064	305	341	2.95	C	1525
	25+35+35+6.0	146	2.03	2.03	3.48	---	329	900	1001	067	292	395	3.08	B	1460
	35+35+35+3.5	225	2.25	2.25	2.25	---	309	900	892	064	339	332	2.65	D	1695
	35+35+35+5.0	203	2.03	2.03	2.91	---	329	900	998	067	305	395	2.95	C	1525
	20+20+20+2.0	163	1.63	1.63	1.63	1.63	257	815	903	055	246	305	3.31	A	1230
	20+20+20+2.5	158	1.58	1.58	1.58	1.98	263	830	925	055	252	320	3.29	A	1260
	20+20+20+3.5	150	1.50	1.50	1.50	2.65	276	865	954	058	278	341	3.11	B	1390
	20+20+20+4.0	138	1.38	1.38	1.38	3.48	296	900	1009	058	270	351	3.33	A	1350
	20+20+20+6.0	129	1.29	1.29	1.29	3.84	309	900	1020	061	274	352			

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
<b>SMKS90E7V3B</b>	2.0+2.0+2.5+2.5+5.0	1.29	1.29	1.61	1.61	3.20	3.09	9.00	10.16	0.61	2.70	3.51	333	A	1350
	2.0+2.0+2.5+2.5+6.0	1.20	1.20	1.50	1.50	3.60	3.22	9.00	10.45	0.64	2.70	3.84	333	A	1350
	2.0+2.0+2.5+3.5+3.5	1.33	1.33	1.68	2.33	2.33	3.02	9.00	9.54	0.61	3.05	3.41	295	C	1525
	2.0+2.0+2.5+3.5+5.0	1.20	1.20	1.50	2.10	3.00	3.22	9.00	10.45	0.64	2.70	3.83	333	A	1350
	2.0+2.0+3.5+3.5+3.5	1.23	1.23	2.18	2.18	2.18	3.16	9.00	9.54	0.64	3.05	3.41	295	C	1525
	2.0+2.5+2.5+2.5+2.5	1.46	1.84	1.84	1.84	2.83	8.82	9.54	0.58	2.92	3.41	3.02	B	1460	
	2.0+2.5+2.5+2.5+3.5	1.39	1.73	1.73	1.73	2.42	2.96	9.00	9.54	0.61	3.05	3.41	295	C	1525
	2.0+2.5+2.5+2.5+5.0	1.25	1.55	1.55	1.55	3.10	3.16	9.00	10.16	0.61	2.70	3.51	333	A	1350
	2.0+2.5+2.5+2.5+6.0	1.17	1.45	1.45	1.45	3.48	3.29	9.00	10.49	0.64	2.70	3.84	333	A	1350
	2.0+2.5+2.5+3.5+3.5	1.28	1.61	1.61	2.25	2.25	3.09	9.00	9.54	0.64	3.05	3.41	295	C	1525
	2.0+2.5+2.5+3.5+5.0	1.17	1.45	1.45	2.03	2.90	3.29	9.00	10.49	0.64	2.70	3.91	333	A	1350
	2.0+2.5+3.5+3.5+3.5	1.20	1.50	2.10	2.10	2.10	3.22	9.00	9.97	0.64	3.05	3.95	295	C	1525
	2.5+2.5+2.5+2.5+2.5	1.80	1.80	1.80	1.80	2.89	9.00	9.54	0.61	3.05	3.41	295	C	1525	
	2.5+2.5+2.5+2.5+3.5	1.67	1.67	1.67	2.32	3.02	9.00	9.54	0.61	2.98	3.41	3.02	B	1490	
	2.5+2.5+2.5+2.5+5.0	1.50	1.50	1.50	1.50	3.00	3.22	9.00	10.45	0.64	2.70	3.83	333	A	1350
	2.5+2.5+2.5+3.5+3.5	1.56	1.56	1.56	2.16	2.16	3.16	9.00	9.54	0.64	3.05	3.41	295	C	1525
	2.5+2.5+3.5+3.5+3.5	1.44	1.44	2.04	2.04	2.04	3.29	9.00	9.97	0.67	2.98	3.95	3.02	B	1490

Note: Connected to 2.0, 2.5, 3.5: wall mounted C type / 5.0, 6.0, 7.1 : wall mounted E type

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
<b>SMKS90E7V3B</b>	2.0	2.00	---	---	---	---	1.72	2.00	3.03	0.41	0.59	1.05	339	A	295
	2.5	2.50	---	---	---	---	1.79	2.50	3.54	0.45	0.74	1.25	338	A	370
	3.5	3.50	---	---	---	---	1.83	3.50	4.68	0.45	1.17	1.46	299	C	585
	5.0	5.00	---	---	---	---	1.98	5.00	5.34	0.45	1.72	1.86	291	C	860
	6.0	6.00	---	---	---	---	2.08	6.00	6.60	0.43	1.97	2.39	3.05	B	985
	7.1	7.10	---	---	---	---	2.18	7.10	7.26	0.46	2.66	2.78	2.67	D	1330
	2.0+2.0	2.00	2.00	---	---	---	1.88	4.00	5.16	0.46	1.17	1.78	342	A	585
	2.0+2.5	2.00	2.50	---	---	---	1.93	4.50	5.57	0.43	1.33	1.78	338	A	665
	2.0+3.5	2.00	3.50	---	---	---	2.03	5.50	6.18	0.43	1.78	2.07	3.09	B	890
	2.0+5.0	2.00	5.00	---	---	---	2.18	7.00	7.31	0.46	2.51	2.74	2.79	D	1255
	2.0+6.0	1.86	5.56	---	---	---	2.30	7.42	7.96	0.50	2.55	2.97	291	C	1275
	2.0+7.1	1.71	6.09	---	---	---	2.45	7.80	8.22	0.53	2.85	3.10	2.74	D	1425
	2.5+2.5	2.50	2.50	---	---	---	1.98	5.00	6.02	0.43	1.42	1.97	352	A	710
	2.5+3.5	2.50	3.50	---	---	---	2.08	6.00	6.60	0.43	1.97	2.33	3.05	B	985
	2.5+5.0	2.41	4.83	---	---	---	2.24	7.24	7.60	0.49	2.68	2.92	2.70	D	1340
	2.5+6.0	2.23	5.36	---	---	---	2.37	7.59	8.03	0.50	2.67	2.97	284	C	1335
	2.5+7.1	2.08	5.90	---	---	---	2.51	7.98	8.22	0.53	2.98	3.10	2.68	D	1490
	3.5+3.5	3.50	3.50	---	---	---	2.18	7.00	7.27	0.46	2.61	2.78	2.68	D	1305
	3.5+5.0	3.13	4.46	---	---	---	2.37	7.59	7.61	0.49	2.92	2.97	2.60	E	1460
	3.5+6.0	2.93	5.01	---	---	---	2.50	7.94	8.21	0.53	2.91	3.10	2.73	D	1455
	3.5+7.1	2.75	5.58	---	---	---	2.64	8.33	8.41	0.57	3.24	3.29	2.57	E	1620
	5.0+5.0	4.06	4.06	---	---	---	2.57	8.12	8.15	0.56	3.26	3.29	249	E	1630
	5.0+6.0	3.85	4.62	---	---	---	2.70	8.47	8.52	0.57	3.19	3.24	2.66	D	1595
	5.0+7.1	3.66	5.20	---	---	---	2.84	8.86	8.90	0.60	3.60	3.66	246	E	1800
	6.0+6.0	4.41	4.41	---	---	---	2.83	8.82	9.00	0.60	3.19	3.33	2.76	D	1595
	6.0+7.1	4.12	4.88	---	---	---	2.97	9.00	9.02	0.64	3.26	3.33	2.76	D	1630
<b>SMKS90E7V3B</b>	7.1+7.1	4.50	4.50	---	---	---	3.12	9.00	9.04	0.64	3.20	3.34	2.81	C	1600
	2.0+2.0+2.0	2.00	2.00	2.00	---	---	2.08	6.00	6.63	0.47	1.75	2.05	343	A	875
	2.0+2.0+2.5	2.00	2.00	2.50	---	---	2.13	6.50	6.97	0.47	2.00	2.27	325	A	1000
	2.0+2.0+3.5	1.93	1.93	3.38	---	---	2.24	7.24	7.64	0.47	2.44	2.73	297	C	1220
	2.0+2.0+5.0	1.72	1.72	4.33	---	---	2.43	7.77	8.40	0.50	2.69	3.13	289	C	1345
	2.0+2.0+6.0	1.62	1.62	4.88	---	---	2.57	8.12	8.84	0.54	2.73	3.19	2.97	C	1365
	2.0+2.0+7.1	1.53	1.53	5.45	---	---	2.71	8.51	9.03	0.57	2.99	3.34	285	C	1495
	2.0+2.5+2.5	2.00	2.50	2.50	---	---	2.18	7.00	7.31	0.47	2.32	2.49	3.02	B	1160
	2.0+2.5+3.5	1.86	2.32	3.24	---	---	2.30	7.42	7.96	0.50	2.55	2.91	291	C	1275
	2.0+2.5+5.0	1.67	2.09	4.18	---	---	2.50	7.94	8.40	0.53	2.81	3.13	283	C	1405
	2.0+2.5+6.0	1.58	1.98	4.74	---	---	2.63	8.30	8.84	0.54	2.86	3.19	290	C	1430
	2.0+2.5+7.1	1.50	1.87	5.31	---	---	2.78	8.68	9.03	0.57	3.13	3.34	2.77	D	1565
	2.0+3.5+3.5	1.73	3.02	3.02	---	---	2.43	7.77	8.23	0.53	2.79	3.11	2.78	D	1395
	2.0+3.5+5.0	1.58	2.77	3.95	---	---	2.63	8.30	8.40	0.57	3.07	3.13	2.70	D	1535
	2.0+3.5+6.0	1.50	2.63	4.52	---	---	2.76	8.65	9.02	0.57	3.06	3.33	2.83	C	1530
	2.0+3.5+7.1	1.43	2.50	5.07	---	---	2.91	9.00	9.04	0.60	3.34	3.39	2.69	D	1670
	2.0+5.0+5.0	1.46	3.68	3.68	---	---	2.83	8.82	8.87	0.60	3.36	3.40	2.63	D	1680
	2.0+5.0+6.0	1.39	3.46	4.15	---	---	2.96	9.00	9.20	0.60	3.15	3.36	2.86	C	1575
	2.0+5.0+7.1	1.28	3.19	4.53	---	---	3.10	9.00	9.22	0.64	3.08	3.36	2.92	C	1540
	2.0+6.0+6.0	1.28	3.86	3.86	---	---	3.09	9.00	9.64	0.64	2.86	3.43	3.15	B	1430
	2.0+6.0+7.1	1.19	3.58	4.23	---	---	3.23	9.00	10.10	0.64	2.79	3.97	323	A	1395
	2.5+2.5+2.5	2.41	2.41	2.41	---	---	2.24	7.23	7.64	0.47	2.43	2.73	298	C	1215
	2.5+2.5+3.5	2.23	2.23	3.13	---	---	2.37	7.59	8.05	0.50	2.67	2.98	284	C	1335
	2.5+2.5+5.0	2.03	2.03	4.06	---	---	2.57	8.12	8.40	0.53	2.94	3.13	2.76	D	1470
	2.5+2.5+6.0	1.93	1.93	4.61	---	---	2.70	8.47	8.84	0.57	2.92	3.19	2.90	C	1460
	2.5+2.5+7.1	1.83	1.83	5.20	---	---	2.84	8.86	9.03	0.60	3.27	3.34	2.71	D	1635

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
SMKS90E7V3B	25+60+7.1	1.44	3.46	4.10	---	---	3.30	9.00	10.10	0.67	2.86	3.97	3.15	B	1430
	3.5+35+3.5	2.77	2.77	2.77	---	---	2.63	8.31	8.35	0.57	3.17	3.24	2.62	D	1585
	3.5+35+5.0	2.57	2.57	3.68	---	---	2.83	8.82	8.88	0.60	3.54	3.57	2.49	E	1770
	3.5+35+6.0	2.42	2.42	4.16	---	---	2.96	9.00	9.03	0.60	3.26	3.33	2.76	D	1630
	3.5+35+7.1	2.23	2.23	4.54	---	---	3.10	9.00	9.05	0.64	3.20	3.34	2.81	C	1600
	3.5+50+5.0	2.34	3.33	3.33	---	---	3.02	9.00	9.06	0.64	3.57	3.59	2.52	E	1785
	3.5+50+6.0	2.18	3.10	3.72	---	---	3.16	9.00	9.21	0.64	3.22	3.36	2.80	D	1610
	3.5+50+7.1	2.02	2.88	4.10	---	---	3.30	9.00	9.65	0.67	3.15	3.88	2.86	C	1575
	3.5+60+6.0	2.04	3.48	3.48	---	---	3.29	9.00	10.08	0.67	2.93	3.97	3.07	B	1465
	5.0+50+5.0	3.00	3.00	3.00	---	---	3.22	9.00	9.49	0.67	3.39	4.04	2.65	D	1695
	20+2.0+2.0+2.0	1.86	1.86	1.86	---	---	2.30	7.44	7.96	0.51	2.13	2.42	3.49	A	1065
	20+2.0+2.0+2.5	1.79	1.79	1.79	2.22	---	2.37	7.59	8.25	0.51	2.25	2.61	3.37	A	1125
	20+2.0+2.0+3.5	1.67	1.67	1.67	2.93	---	2.50	7.94	8.78	0.54	2.42	2.99	3.28	A	1210
	20+2.0+2.0+5.0	1.54	1.54	1.54	3.85	---	2.70	8.47	9.03	0.57	2.81	3.22	3.01	B	1405
	20+2.0+2.0+6.0	1.47	1.47	1.47	4.41	---	2.83	8.82	9.65	0.58	2.86	3.43	3.08	B	1430
	20+2.0+2.0+7.1	1.37	1.37	1.37	4.89	---	2.97	9.00	9.68	0.61	2.93	3.44	3.07	B	1465
	20+2.0+2.5+2.5	1.73	1.73	2.16	2.16	---	2.43	7.78	8.53	0.51	2.30	2.79	3.38	A	1150
	20+2.0+2.5+3.5	1.62	1.62	2.03	2.85	---	2.57	8.12	8.86	0.54	2.67	3.20	3.04	B	1335
	20+2.0+2.5+5.0	1.50	1.50	1.88	3.77	---	2.76	8.65	9.21	0.57	2.95	3.36	2.93	C	1475
	20+2.0+2.5+6.0	1.44	1.44	1.80	4.32	---	2.89	9.00	9.65	0.58	3.00	3.43	3.00	C	1500
	20+2.0+2.5+7.1	1.32	1.32	1.65	4.71	---	3.04	9.00	9.68	0.61	2.93	3.44	3.07	B	1465
	20+2.0+3.5+3.5	1.54	1.54	2.70	2.70	---	2.70	8.48	8.86	0.57	2.93	3.20	2.89	C	1465
	20+2.0+35+5.0	1.44	1.44	2.52	3.60	---	2.89	9.00	9.22	0.61	3.22	3.36	2.80	D	1610
	20+2.0+35+6.0	1.33	1.33	2.34	4.00	---	3.02	9.00	9.66	0.61	2.86	3.43	3.15	B	1430
	20+2.0+35+7.1	1.23	1.23	2.16	4.38	---	3.17	9.00	9.68	0.64	2.79	3.44	3.23	A	1395
	20+2.0+50+5.0	1.29	1.29	3.21	3.21	---	3.09	9.00	9.40	0.64	3.11	3.39	2.89	C	1555
SMKS90E7V3B	20+2.0+50+6.0	1.20	1.20	3.00	3.60	---	3.22	9.00	10.40	0.64	2.88	4.26	3.13	B	1440
	20+2.5+2.5+2.5	1.67	2.09	2.09	2.09	---	2.50	7.94	8.78	0.54	2.42	2.99	3.28	A	1210
	20+2.5+2.5+3.5	1.57	1.98	1.98	2.77	---	2.63	8.30	8.86	0.54	2.80	3.20	2.96	C	1400
	20+2.5+2.5+5.0	1.46	1.84	1.84	3.68	---	2.83	8.82	9.21	0.57	3.08	3.36	2.86	C	1540
	20+2.5+2.5+6.0	1.39	1.73	1.73	4.15	---	2.96	9.00	9.65	0.61	2.93	3.43	3.07	B	1465
	20+2.5+2.5+7.1	1.27	1.60	1.60	4.53	---	3.10	9.00	9.68	0.64	2.79	3.44	3.23	A	1395
	20+2.5+3.5+3.5	1.50	1.89	2.63	2.63	---	2.76	8.65	9.04	0.57	3.06	3.34	2.83	C	1530
	20+2.5+3.5+5.0	1.39	1.73	2.42	3.46	---	2.96	9.00	9.22	0.61	3.22	3.36	2.80	D	1610
	20+2.5+3.5+6.0	1.28	1.61	2.25	3.86	---	3.09	9.00	9.66	0.64	2.86	3.43	3.15	B	1430
	20+2.5+35+7.1	1.19	1.49	2.09	4.23	---	3.23	9.00	10.12	0.64	2.79	3.98	3.23	A	1395
	20+2.5+50+5.0	1.25	1.55	3.10	3.10	---	3.16	9.00	9.40	0.64	3.11	3.39	2.89	C	1555
	20+2.5+50+6.0	1.17	1.45	2.90	3.48	---	3.29	9.00	10.40	0.64	2.88	4.26	3.13	B	1440
	20+3.5+3.5+3.5	1.44	2.52	2.52	2.52	---	2.89	9.00	9.05	0.60	3.34	3.39	2.69	D	1670
	20+3.5+35+5.0	1.29	2.25	2.25	3.21	---	3.09	9.00	9.22	0.64	3.22	3.37	2.80	D	1610
	20+3.5+35+6.0	1.20	2.10	2.10	3.60	---	3.22	9.00	10.10	0.64	2.86	3.97	3.15	B	1430
	20+3.5+50+5.0	1.17	2.03	2.90	2.90	---	3.29	9.00	9.96	0.67	3.11	4.15	2.89	C	1555
	25+2.5+2.5+2.5	2.03	2.03	2.03	2.03	---	2.57	8.12	8.85	0.54	2.67	3.19	3.04	B	1335
	25+2.5+2.5+3.5	1.93	1.93	1.93	2.68	---	2.70	8.47	8.86	0.57	2.93	3.20	2.89	C	1465
	25+2.5+2.5+5.0	1.80	1.80	1.80	3.60	---	2.89	9.00	9.21	0.61	3.22	3.36	2.80	D	1610
	25+2.5+2.5+6.0	1.67	1.67	1.67	3.99	---	3.02	9.00	9.65	0.61	2.93	3.43	3.07	B	1465
	25+2.5+2.5+7.1	1.54	1.54	1.54	4.38	---	3.17	9.00	9.68	0.64	2.79	3.44	3.23	A	1395
	25+2.5+3.5+3.5	1.84	1.84	2.57	2.57	---	2.83	8.82	9.04	0.60	3.20	3.34	2.76	D	1600
	25+2.5+3.5+5.0	1.67	1.67	2.33	3.33	---	3.02	9.00	9.22	0.64	3.22	3.36	2.80	D	1610
	25+2.5+3.5+6.5	1.55	1.55	2.18	3.72	---	3.16	9.00	9.66	0.64	2.86	3.43	3.15	B	1430
	25+2.5+50+5.0	1.44	2.02	4.10	4.10	---	3.30	9.00	10.12	0.67	2.79	3.98	3.23	A	1395
	25+3.5+3.5+3.5	1.74	2.42	2.42	2.42	---	2.96	9.00	9.95	0.67	3.11	4.15	2.89	C	1555
	25+3.5+3.5+5.0	1.56	2.17	2.17	3.10	---	3.16	9.00	9.22	0.64	3.22	3.37	2.80	D	1610
	25+3.5+35+6.0	1.46	2.03	2.03	3.48	---	3.29	9.00	10.10	0.67	2.86	3.97	3.15	B	1430
	35+35+35+3.5	2.25	2.25	2.25	2.25	---	3.09	9.00	9.05	0.64	3.34	3.39	2.69	D	1670
	35+35+35+5.0	2.03	2.03	2.03	2.91	---	3.29	9.00	9.66	0.67	3.22	3.88	2.80	D	1610
	20+2.0+2.0+2.0+2.0	1.63	1.63	1.63	1.63	2.57	8.15	9.03	0.55	2.40	3.00	3.40	A	1200	
SMKS90E7V3B	20+2.0+2.0+2.0+2.5	1.58	1.58	1.58	1.98	2.63	8.30	9.25	0.55	2.47	3.14	3.36	A	1235	
	20+2.0+2.0+2.0+3.5	1.50	1.50	1.50	2.65	2.76	8.65	9.64	0.58	2.73	3.43	3.17	B	1365	
	20+2.0+2.0+2.0+5.0	1.38	1.38	1.38	3.48	2.96	9.00	9.85	0.61	2.88	3.46	3.13	B	1440	
	20+2.0+2.0+2.0+6.0	1.29	1.29	1.29	3.84	3.09	9.00	10.30	0.61	2.68	3.53	3.36	A	1340	
	20+2.0+2.0+2.0+7.1	1.19	1.19	1.19	1.19	4.24	3.23	9.00	10.46	0.64	2.58	3.70	3.49	A	1290
	20+2.0+2.0+2.5+2.5	1.54	1.54	1.54	1.92	2.70	8.46	9.45	0.55	2.59	3.29	3.27	A	1295	
	20+2.0+2.0+2.5+3.5	1.47	1.47	1.47	1.84	2.57	8.82	9.67	0.58	2.79	3.43	3.16	B	1395	
	20+2.0+2.0+2.5+5.0	1.33	1.33	1.33	1.67	3.34	3.02	9.00	9.85	0.61	2.88	3.46	3.13	B	1440
	20+2.0+2.0+2.5+6.0	1.24	1.24	1.24	1.55	3.73	3.16	9.00	10.30	0.61	2.68	3.53	3.36	A	1340
	20+2.0+2.0+2.5+7.1	1.15	1.15	1.15	1.44	4.11	3.30	9.00	10.50	0.64	2.58	3.70	3.49	A	1290
	20+2.0+2.0+3.5+3.5	1.54	1.54	1.54	1.92	2.70	8.46	9.45	0.55	2.63	3.29	3.22	A	1315	
	20+2.0+2.0+3.5+5.0	1.24	1.24	1.24	2.17	3.11	3.16	9.00	9.86	0.64	2.88	3.46	3.13	B	1440
	20+2.0+2.0+3.5+6.0	1.16	1.16	1.16	2.03	3.49	3.29	9.00	10.49	0.64	2				

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
<b>SMKS90E7V3B</b>	25+25+25+25+25	1.80	1.80	1.80	1.80	1.80	2.89	9.00	9.67	0.58	2.93	3.43	3.07	B	1465
	25+25+25+25+35	1.67	1.67	1.67	1.67	2.32	3.02	9.00	9.67	0.61	2.86	3.43	3.15	B	1430
	25+25+25+25+50	1.50	1.50	1.50	1.50	3.00	3.22	9.00	10.41	0.64	2.88	4.26	3.13	B	1440
	25+25+25+35+35	1.56	1.56	1.56	2.16	2.16	3.16	9.00	9.68	0.64	2.93	3.44	3.07	B	1465
	25+25+35+35+35	1.44	1.44	2.04	2.04	2.04	3.29	9.00	10.12	0.67	2.86	3.98	3.15	B	1430

Note: Connected to 2.0, 2.5, 3.5 and 5.0: wall mounted D type / 6.0, 7.1 : wall mounted E type

# heat pump R-410A

## inverter controlled outdoor units

### COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
2MXS40FV1B	2.0	2.00	---	---	1.45	2.00	2.40	0.32	0.45	0.59	4.44	A	225	
	2.5	2.50	---	---	1.45	2.50	3.00	0.32	0.62	0.82	4.03	A	310	
	3.5	3.50	---	---	1.45	3.50	4.00	0.32	1.08	1.41	3.24	A	540	
	2.0+2.0	2.00	2.00	1.65	4.00	4.10	0.30	1.09	1.13	3.67	A	545		
	2.0+2.5	1.85	2.15	1.65	4.00	4.20	0.30	1.08	1.19	3.70	A	540		
	2.0+3.5	1.75	2.25	1.65	4.00	4.40	0.30	1.06	1.31	3.77	A	530		
	2.5+2.5	2.00	2.00	1.65	4.00	4.30	0.30	1.07	1.24	3.74	A	535		
	2.5+3.5	1.80	2.20	1.65	4.00	4.50	0.30	1.05	1.35	3.81	A	525		

### HEATING

OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			EER	ENERGY LABEL
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX		
2MXS40FV1B	2.0	3.00	---	---	1.20	3.00	3.70	0.29	0.85	1.27	3.53	B	
	2.5	3.40	---	---	1.20	3.40	4.10	0.29	1.06	1.52	3.21	C	
	3.5	3.80	---	---	1.20	3.80	4.40	0.29	1.29	1.73	2.95	D	
	2.0+2.0	2.10	2.10	1.50	4.20	4.60	0.27	1.01	1.17	4.16	A		
	2.0+2.5	2.10	2.30	1.50	4.40	4.70	0.27	1.08	1.21	4.07	A		
	2.0+3.5	2.00	2.40	1.50	4.40	4.70	0.26	1.06	1.19	4.15	A		
	2.5+2.5	2.20	2.20	1.50	4.40	4.70	0.27	1.07	1.20	4.11	A		
	2.5+3.5	2.05	2.35	1.50	4.40	4.70	0.26	1.05	1.18	4.19	A		

Note: Connected to 2.0, 2.5, 3.5 class: wall mounted D type

### COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
2MXS40FV1B	2.0	2.00	---	---	1.45	2.00	2.40	0.32	0.47	0.61	4.26	A	235	
	2.5	2.50	---	---	1.45	2.50	3.00	0.32	0.65	0.86	3.85	A	325	
	3.5	3.50	---	---	1.45	3.50	4.00	0.32	1.14	1.43	3.07	C	570	
	2.0+2.0	2.00	2.00	1.65	4.00	4.10	0.30	1.13	1.17	3.54	A	565		
	2.0+2.5	1.85	2.15	1.65	4.00	4.20	0.30	1.12	1.21	3.57	A	560		
	2.0+3.5	1.75	2.25	1.65	4.00	4.40	0.30	1.10	1.35	3.64	A	550		
	2.5+2.5	2.00	2.00	1.65	4.00	4.30	0.30	1.11	1.28	3.60	A	555		
	2.5+3.5	1.80	2.20	1.65	4.00	4.50	0.30	1.09	1.41	3.67	A	545		

### HEATING

OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			EER	ENERGY LABEL
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX		
2MXS40FV1B	2.0	3.00	---	---	1.20	3.00	3.70	0.29	0.90	1.30	3.33	C	
	2.5	3.40	---	---	1.20	3.40	4.10	0.29	1.11	1.59	3.06	D	
	3.5	3.80	---	---	1.20	3.80	4.40	0.29	1.35	1.78	2.81	D	
	2.0+2.0	2.10	2.10	1.50	4.20	4.60	0.28	1.06	1.24	3.96	A		
	2.0+2.5	2.10	2.30	1.50	4.40	4.70	0.28	1.14	1.29	3.86	A		
	2.0+3.5	2.00	2.40	1.50	4.40	4.70	0.28	1.12	1.27	3.93	A		
	2.5+2.5	2.20	2.20	1.50	4.40	4.70	0.28	1.13	1.28	3.89	A		
	2.5+3.5	2.05	2.35	1.50	4.40	4.70	0.28	1.10	1.26	4.00	A		

Note: Connected to 2.0, 2.5, 3.5 class: wall mounted C type

## COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
2MXS50FV1B	2.0	2.00	---	---	---	1.53	2.00	2.60	0.33	0.47	0.69	4.26	A	235
	2.5	2.50	---	---	---	1.53	2.50	3.10	0.33	0.66	0.92	3.79	A	330
	3.5	3.50	---	---	---	1.53	3.50	4.00	0.33	1.09	1.42	3.21	A	545
	5.0	5.00	---	---	---	1.57	5.00	5.10	0.33	2.06	2.17	2.43	E	1030
	2.0+2.0	2.00	2.00	---	---	1.81	4.00	4.90	0.33	1.05	1.53	3.81	A	525
	2.0+2.5	2.00	2.50	1.81	---	1.81	4.50	5.00	0.33	1.29	1.60	3.49	A	645
	2.0+3.5	1.82	3.18	1.81	5.00	5.30	0.33	1.56	1.76	3.21	A	780		
	2.0+5.0	1.43	3.57	1.81	5.00	5.40	0.33	1.47	1.72	3.40	A	735		
	2.5+2.5	2.50	2.50	1.81	5.00	5.20	0.33	1.56	1.71	3.21	A	780		
	2.5+3.5	2.08	2.92	1.81	5.00	5.30	0.33	1.53	1.76	3.27	A	765		
	2.5+5.0	1.67	3.33	1.81	5.00	5.40	0.33	1.47	1.73	3.40	A	735		
	3.5+3.5	2.50	2.50	1.81	5.00	5.30	0.33	1.50	1.72	3.33	A	750		
	3.5+5.0	2.06	2.94	1.81	5.00	5.40	0.33	1.44	1.70	3.47	A	720		

## HEATING

OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			EER	ENERGY LABEL	
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
2MXS50FV1B	2.0	3.00	---	---	---	1.21	3.00	3.70	0.27	0.82	1.14	3.66	A	
	2.5	3.40	---	---	---	1.21	3.40	4.10	0.25	0.98	1.33	3.47	B	
	3.5	4.00	---	---	---	1.21	4.00	4.60	0.25	1.24	1.53	3.23	C	
	5.0	5.40	---	---	---	1.33	5.40	5.60	0.27	1.83	1.98	2.95	D	
	2.0+2.0	2.65	2.65	1.28	---	1.28	5.30	5.70	0.24	1.34	1.53	3.96	A	
	2.0+2.5	2.44	3.06	1.28	5.50	5.80	0.24	1.42	1.56	3.87	A			
	2.0+3.5	2.04	3.56	1.34	5.60	5.90	0.25	1.44	1.57	3.89	A			
	2.0+5.0	1.63	4.07	1.39	5.70	6.20	0.25	1.37	1.61	4.16	A			
	2.5+2.5	2.80	2.80	1.28	5.60	5.80	0.24	1.45	1.55	3.86	A			
	2.5+3.5	2.38	3.32	1.34	5.70	6.00	0.25	1.48	1.64	3.85	A			
	2.5+5.0	1.90	3.80	1.45	5.70	6.30	0.26	1.36	1.65	4.19	A			
	3.5+3.5	2.85	2.85	1.40	5.70	6.10	0.25	1.46	1.65	3.90	A			
	3.5+5.0	2.35	3.35	1.45	5.70	6.40	0.25	1.35	1.65	4.22	A			

Note: Connected to 2.0, 2.5, 3.5, 5.0 kW class: wall mounted D series

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX			
3MXS52E2V1B	2.0	2.00	---	---	---	1.76	2.00	2.84	0.35	0.46	0.74	4.35	A	230
	2.5	250	---	---	---	1.76	2.50	3.12	0.35	0.62	0.75	4.03	A	310
	3.5	350	---	---	---	1.76	3.50	4.18	0.35	0.97	1.29	3.61	A	485
	5.0	---	---	5.00	---	1.79	5.00	5.40	0.35	1.75	2.03	2.86	C	875
	2.0+2.0	2.00	2.00	---	---	1.88	4.00	5.96	0.35	0.95	1.91	4.21	A	475
	2.0+2.5	2.00	250	---	---	1.88	450	623	0.35	1.18	2.14	3.81	A	590
	2.0+3.5	1.89	331	---	---	1.88	520	624	0.35	155	2.07	3.35	A	775
	2.0+5.0	1.49	---	3.71	---	1.88	520	647	0.35	1.42	2.15	3.66	A	710
	2.5+2.5	250	250	---	---	1.88	500	623	0.35	145	2.14	3.45	A	725
	2.5+3.5	2.17	3.03	---	---	1.88	520	635	0.35	155	2.25	3.35	A	775
	2.5+5.0	1.73	---	3.47	---	1.88	520	647	0.35	142	2.07	3.66	A	710
	3.5+3.5	2.60	2.60	---	---	1.88	520	640	0.35	155	2.25	3.35	A	775
	3.5+5.0	2.14	---	3.06	---	1.88	520	649	0.35	142	2.09	3.66	A	710
	2.0+2.0+2.0	1.73	1.73	1.73	---	1.86	519	7.04	0.35	124	2.16	4.19	A	620
	2.0+2.0+2.5	1.60	1.60	1.99	---	1.86	519	7.04	0.35	124	2.16	4.19	A	620
	2.0+2.0+3.5	1.38	138	2.43	---	1.95	519	7.06	0.37	124	2.16	4.19	A	620
	2.0+2.5+2.5	1.49	185	1.85	---	1.86	519	7.04	0.35	124	2.16	4.19	A	620
	2.0+2.5+3.5	1.30	1.63	2.27	---	1.95	520	7.06	0.37	124	2.16	4.19	A	620
	2.0+3.5+3.5	1.16	2.02	2.02	---	1.95	520	7.07	0.37	124	2.16	4.19	A	620
	2.5+2.5+2.5	1.73	1.73	1.73	---	1.95	519	7.04	0.37	124	2.16	4.19	A	620
	2.5+2.5+3.5	1.53	1.53	2.14	---	1.95	520	7.06	0.37	123	2.16	4.23	A	615
	2.0+2.0+5.0	1.16	1.16	2.88	---	2.11	520	7.30	0.38	122	2.26	4.26	A	610

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)				TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			COP	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX		
3MXS52E2V1B	2.0	2.72	---	---	---	1.21	2.72	3.75	0.30	0.72	1.20	3.78	A
	2.5	3.40	---	---	---	1.21	3.40	4.00	0.30	0.99	1.26	3.43	B
	3.5	4.20	---	---	---	1.21	4.20	4.82	0.30	1.39	1.68	3.02	D
	5.0	---	---	5.80	---	1.33	5.80	6.79	0.30	2.16	2.59	2.69	E
	20+2.0	3.05	3.05	---	---	1.28	6.10	7.00	0.31	1.70	2.28	3.59	B
	20+2.5	2.78	3.47	---	---	1.28	6.25	7.00	0.31	1.75	2.28	3.57	B
	20+3.5	2.38	4.17	---	---	1.34	6.55	7.04	0.31	1.86	2.28	3.52	B
	20+5.0	1.94	---	4.86	---	1.39	6.80	7.20	0.31	1.87	2.32	3.64	A
	25+2.5	3.25	3.25	---	---	1.28	6.50	7.00	0.31	1.86	2.31	3.49	B
	25+3.5	2.79	3.97	---	---	1.34	6.70	7.19	0.31	1.93	2.36	3.47	B
	25+5.0	2.27	---	4.53	---	1.45	6.80	7.35	0.31	1.87	2.32	3.64	A
	35+3.5	3.40	3.40	---	---	1.40	6.80	7.22	0.31	1.97	2.35	3.45	B
	35+5.0	2.80	---	4.00	---	1.45	6.80	7.50	0.31	1.83	2.31	3.72	A
	20+20+2.0	2.26	2.26	2.26	---	1.34	6.78	8.02	0.32	1.57	2.14	4.32	A
	20+2.0+2.5	2.09	2.09	2.60	---	1.34	6.78	8.02	0.32	1.57	2.14	4.32	A
	20+20+3.5	1.80	1.80	3.18	---	1.45	6.78	8.05	0.32	1.56	2.14	4.35	A
	20+2.5+2.5	1.94	2.42	2.42	---	1.34	6.78	8.02	0.32	1.57	2.14	4.32	A
	20+25+3.5	1.70	2.13	2.97	---	1.57	6.80	8.05	0.32	1.56	2.14	4.36	A
	20+35+3.5	1.52	2.64	2.64	---	1.56	6.80	8.08	0.32	1.56	2.14	4.36	A
	25+2.5+2.5	2.26	2.26	2.26	---	1.45	6.78	8.02	0.32	1.57	2.14	4.32	A
	25+2.5+3.5	2.00	2.00	2.80	---	1.57	6.80	8.05	0.32	1.56	2.14	4.36	A
	20+2.0+5.0	1.51	1.51	3.78	---	1.67	6.80	8.27	0.32	1.64	2.11	4.15	A

Note: Connected to 2.0, 2.5, 3.5 and 5.0 class : wall mounted D type

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)				TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX			
3MXS52E2V1B	2.0	2.00	---	---	---	1.74	2.00	2.81	0.35	0.46	0.74	435	A	230
	2.5	2.50	---	---	---	1.74	2.50	3.07	0.35	0.64	0.75	391	A	320
	3.5	3.50	---	---	---	1.74	3.50	4.08	0.35	0.98	1.28	357	A	490
	5.0	---	---	5.00	---	1.85	5.00	5.80	0.35	1.54	2.10	325	A	770
	20+2.0	2.00	2.00	---	---	1.87	4.00	5.78	0.35	1.00	1.90	400	A	500
	20+2.5	2.00	2.50	---	---	1.87	4.50	6.06	0.35	1.23	2.23	366	A	615
	20+3.5	1.89	3.31	---	---	1.87	5.20	6.06	0.35	1.62	2.16	321	A	810
	20+5.0	1.49	---	3.71	---	1.88	5.20	6.50	0.35	1.32	2.18	394	A	660
	25+2.5	2.50	2.50	---	---	1.87	5.00	6.06	0.35	1.54	2.23	325	A	770
	25+3.5	2.17	3.03	---	---	1.87	5.20	6.06	0.35	1.62	2.23	321	A	810
	25+5.0	1.73	---	3.47	---	1.88	5.20	6.52	0.35	1.32	2.17	394	A	660
	35+3.5	2.60	2.60	---	---	1.87	5.20	6.06	0.35	1.62	2.23	321	A	810
	35+5.0	2.14	---	3.06	---	1.88	5.20	6.52	0.35	1.32	2.16	394	A	660
	20+20+2.0	1.73	1.73	1.73	---	1.88	5.19	6.93	0.35	1.29	2.26	402	A	645
	20+2.0+2.5	1.60	1.60	1.99	---	1.88	5.19	6.93	0.35	1.29	2.26	402	A	645
	20+20+3.5	1.38	1.38	2.43	---	1.97	5.19	6.93	0.37	1.29	2.26	402	A	645
	20+2.5+2.5	1.49	1.85	1.85	---	1.88	5.19	6.93	0.35	1.29	2.26	402	A	645
	20+2.5+3.5	1.30	1.63	2.27	---	1.97	5.20	6.93	0.37	1.29	2.26	403	A	645
	20+35+3.5	1.16	2.02	2.02	---	1.97	5.20	6.93	0.37	1.29	2.26	403	A	645
	25+2.5+2.5	1.73	1.73	1.73	---	1.97	5.19	6.93	0.37	1.29	2.26	402	A	645
	25+2.5+3.5	1.53	1.53	2.14	---	1.97	5.20	6.93	0.37	1.32	2.26	394	A	660
	20+2.0+5.0	1.16	1.16	2.88	---	2.07	5.20	7.30	0.38	1.25	2.29	416	A	625

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)				TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			COP	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX		
3MXS52E2V1B	2.0	2.72	---	---	---	1.22	2.72	3.75	0.30	0.76	1.24	3.58	B
	2.5	3.40	---	---	---	1.22	3.40	4.00	0.30	1.09	1.30	3.12	D
	3.5	4.20	---	---	---	1.22	4.20	4.41	0.30	1.47	1.57	2.86	C
	5.0	---	---	5.80	---	1.30	5.80	6.79	0.30	1.74	2.51	333	C
	20+2.0	3.05	3.05	---	---	1.30	6.10	6.82	0.30	1.86	2.27	328	C
	20+2.5	2.78	3.47	---	---	1.30	6.25	6.82	0.30	1.92	2.27	326	C
	20+3.5	2.38	4.17	---	---	1.35	6.55	6.89	0.31	2.09	2.27	313	D
	20+5.0	1.94	---	4.86	---	1.37	6.80	7.42	0.31	1.62	2.09	420	A
	25+2.5	3.25	3.25	---	---	1.30	6.50	6.82	0.30	2.02	2.27	322	C
	25+3.5	2.79	3.97	---	---	1.35	6.70	6.98	0.31	2.14	2.35	313	D
	25+5.0	2.27	---	4.53	---	1.43	6.80	7.45	0.31	1.62	2.09	420	A
	35+3.5	3.40	3.40	---	---	1.41	6.80	7.18	0.31	2.18	2.43	312	D
	35+5.0	2.80	---	4.00	---	1.43	6.80	7.54	0.31	1.62	2.09	420	A
	20+20+2.0	2.26	2.26	2.26	---	1.36	6.78	7.70	0.31	1.68	2.21	404	A
	20+2.0+2.5	2.09	2.09	2.60	---	1.36	6.78	7.70	0.31	1.68	2.21	404	A
	20+2.0+3.5	1.80	1.80	3.18	---	1.48	6.78	7.73	0.31	1.68	2.21	404	A
	20+2.5+2.5	1.94	2.42	2.42	---	1.36	6.78	7.70	0.31	1.68	2.21	404	A
	20+2.5+3.5	1.70	2.13	2.97	---	1.59	6.80	7.73	0.31	1.68	2.21	405	A
	20+3.5+3.5	1.52	2.64	2.64	---	1.59	6.80	7.77	0.31	1.68	2.21	405	A
	25+2.5+2.5	2.26	2.26	2.26	---	1.48	6.78	7.70	0.31	1.68	2.21	404	A
	25+2.5+3.5	2.00	2.00	2.80	---	1.59	6.80	7.73	0.31	1.68	2.21	405	A
	20+20+5.0	1.51	1.51	3.78	---	1.65	6.80	7.95	0.32	1.52	2.08	447	A

Note: Connected to 2.0, 2.5, 3.5 : wall mounted C type / 5.0 : wall mounted E type

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX			
3MXS52E2V1B	2.0	2.00	---	---	---	1.76	2.00	2.84	0.35	0.46	0.74	4.35	A	230
	2.5	2.50	---	---	---	1.76	2.50	3.12	0.35	0.62	0.75	4.03	A	310
	3.5	3.50	---	---	---	1.76	3.50	4.18	0.35	0.97	1.29	3.61	A	485
	5.0	---	---	5.00	---	1.85	5.00	5.80	0.35	1.54	2.10	3.25	A	770
	2.0+2.0	2.00	2.00	---	---	1.88	4.00	5.96	0.35	0.95	1.91	4.21	A	475
	2.0+2.5	2.00	2.50	---	---	1.88	4.50	6.23	0.35	1.18	2.14	3.81	A	590
	2.0+3.5	1.89	3.31	---	---	1.88	5.20	6.24	0.35	1.55	2.14	3.35	A	775
	2.0+5.0	1.49	---	3.71	---	1.88	5.20	6.91	0.35	1.28	2.07	4.06	A	640
	2.5+2.5	2.50	2.50	---	---	1.88	5.00	6.23	0.35	1.45	2.14	3.45	A	725
	2.5+3.5	2.17	3.03	---	---	1.88	5.20	6.35	0.35	1.55	2.25	3.35	A	775
	2.5+5.0	1.73	---	3.47	---	1.88	5.20	6.91	0.35	1.28	2.07	4.06	A	640
	3.5+3.5	2.60	2.60	---	---	1.88	5.20	6.40	0.35	1.55	2.25	3.35	A	775
	3.5+5.0	2.14	---	3.06	---	1.88	5.20	6.92	0.35	1.26	2.08	4.13	A	630
	2.0+2.0+2.0	1.73	1.73	1.73	---	1.86	5.19	7.04	0.35	1.24	2.16	4.19	A	620
	2.0+2.0+2.5	1.60	1.60	1.99	---	1.86	5.19	7.04	0.35	1.24	2.16	4.19	A	620
	2.0+2.0+3.5	1.38	1.38	2.43	---	1.95	5.19	7.06	0.37	1.24	2.16	4.19	A	620
	2.0+2.5+2.5	1.49	1.85	1.85	---	1.86	5.19	7.04	0.35	1.24	2.16	4.19	A	620
	2.0+2.5+3.5	1.30	1.63	2.27	---	1.95	5.20	7.06	0.37	1.24	2.16	4.19	A	620
	2.0+3.5+3.5	1.16	2.02	2.02	---	1.95	5.20	7.07	0.37	1.24	2.16	4.19	A	620
	2.5+2.5+2.5	1.73	1.73	1.73	---	1.95	5.19	7.04	0.37	1.24	2.16	4.19	A	620
	2.5+2.5+3.5	1.53	1.53	2.14	---	1.95	5.20	7.06	0.37	1.23	2.16	4.23	A	615
	2.0+2.0+5.0	1.16	1.16	2.88	---	2.04	5.20	7.30	0.39	1.22	2.19	4.26	A	610

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX		
3MXS52E2V1B	2.0	2.72	---	---	---	1.21	2.72	3.75	0.30	0.72	1.20	3.78	A
	2.5	3.40	---	---	---	1.21	3.40	4.00	0.30	0.99	1.26	3.43	B
	3.5	4.20	---	---	---	1.21	4.20	4.82	0.30	1.39	1.68	3.02	D
	5.0	---	---	5.80	---	1.30	5.80	6.79	0.30	1.74	2.51	3.33	C
	2.0+2.0	3.05	3.05	---	---	1.28	6.10	7.00	0.31	1.70	2.28	3.59	B
	2.0+2.5	2.78	3.47	---	---	1.28	6.25	7.00	0.31	1.75	2.28	3.57	B
	2.0+3.5	2.38	4.17	---	---	1.34	6.55	7.04	0.31	1.86	2.28	3.52	B
	2.0+5.0	1.94	---	4.86	---	1.36	6.80	7.95	0.31	1.52	2.22	4.47	A
	2.5+2.5	3.25	3.25	---	---	1.28	6.50	7.00	0.31	1.86	2.31	3.49	B
	2.5+3.5	2.79	3.97	---	---	1.34	6.70	7.19	0.31	1.93	2.36	3.47	B
	2.5+5.0	2.27	---	4.53	---	1.42	6.80	7.95	0.31	1.52	2.22	4.47	A
	3.5+3.5	3.40	3.40	---	---	1.40	6.80	7.22	0.31	1.97	2.35	3.45	B
	3.5+5.0	2.80	---	4.00	---	1.42	6.80	7.98	0.31	1.52	2.21	4.47	A
	2.0+2.0+2.0	2.26	2.26	2.26	---	1.34	6.78	8.02	0.32	1.57	2.14	4.32	A
	2.0+2.0+2.5	2.09	2.09	2.60	---	1.34	6.78	8.02	0.32	1.57	2.14	4.32	A
	2.0+2.0+3.5	1.80	1.80	3.18	---	1.45	6.78	8.05	0.32	1.56	2.14	4.35	A
	2.0+2.5+2.5	1.94	2.42	2.42	---	1.34	6.78	8.02	0.32	1.57	2.14	4.32	A
	2.0+2.5+3.5	1.70	2.13	2.97	---	1.57	6.80	8.05	0.32	1.56	2.14	4.36	A
	2.0+3.5+3.5	1.52	2.64	2.64	---	1.56	6.80	8.08	0.32	1.56	2.14	4.36	A
	2.5+2.5+2.5	2.26	2.26	2.26	---	1.45	6.78	8.02	0.32	1.57	2.14	4.32	A
	2.5+2.5+3.5	2.00	2.00	2.80	---	1.57	6.80	8.05	0.32	1.56	2.14	4.36	A
	2.0+2.0+5.0	1.51	1.51	3.78	---	1.64	6.80	8.30	0.32	1.42	2.04	4.79	A

Note: Connected to 2.0, 2.5, 3.5 : wall mounted D type / 5.0 : wall mounted E type

## COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
4MXS68F2V1B	2.0	2.00	---	---	---	1.95	2.00	2.63	0.44	0.47	0.62	4.26	A	235
	2.5	250	---	---	---	1.95	250	337	0.46	0.59	0.85	4.24	A	295
	3.5	350	---	---	---	1.95	350	476	0.47	0.91	1.47	3.85	A	455
	5.0	---	---	5.00	---	1.96	5.00	5.91	0.45	1.71	2.20	2.92	C	855
	2.0+2.0	2.00	2.00	---	---	1.97	4.00	5.02	0.43	1.00	1.45	4.00	A	500
	2.0+2.5	2.00	2.50	---	---	1.97	4.50	533	0.43	1.20	1.61	3.75	A	600
	2.0+3.5	2.00	3.50	---	---	1.97	5.50	6.18	0.42	1.66	2.15	3.31	A	830
	2.0+5.0	1.94	---	4.86	---	1.97	6.80	7.12	0.41	2.41	2.65	2.82	C	1205
	2.0+6.0	1.70	---	5.10	---	1.98	6.80	7.56	0.4	2.21	2.75	3.08	B	1105
	2.5+2.5	2.50	2.50	---	---	1.97	5.00	5.98	0.45	1.46	2.00	3.42	A	730
	2.5+3.5	2.50	3.50	---	---	1.97	6.00	6.44	0.43	2.06	2.37	2.91	C	1030
	2.5+5.0	2.27	---	4.53	---	1.97	6.80	7.23	0.4	2.41	2.75	2.82	C	1205
	2.5+6.0	2.00	---	4.80	---	1.98	6.80	7.56	0.38	2.21	2.75	3.08	B	1105
	3.5+3.5	3.40	3.40	---	---	1.97	6.80	6.99	0.41	2.51	2.66	2.71	D	1255
	3.5+6.0	2.80	---	4.00	---	1.97	6.80	7.61	0.38	2.41	3.12	2.82	C	1205
	3.5+6.0	2.51	---	4.29	---	2.28	6.80	7.91	0.43	2.21	3.06	3.08	B	1105
	5.0+5.0	---	---	3.40	3.40	2.36	6.80	8.06	0.47	2.31	3.35	2.94	C	1155
	5.0+6.0	---	---	3.09	3.71	2.49	6.80	8.28	0.48	2.12	3.28	3.21	A	1060
	2.0+2.0+2.0	2.00	2.00	2.00	---	1.98	6.00	651	0.42	1.64	1.89	3.66	A	820
	2.0+2.0+2.5	2.00	2.00	2.50	---	1.98	6.50	689	0.42	1.89	2.12	3.44	A	945
	2.0+2.0+3.5	1.81	1.81	3.18	---	1.98	6.80	7.25	0.41	2.07	2.35	3.29	A	1035
	2.0+2.0+5.0	1.51	1.51	3.78	---	1.98	6.80	7.85	0.39	2.02	2.69	3.37	A	1010
	2.0+2.0+6.0	1.36	1.36	4.08	---	2.33	6.80	8.11	0.44	1.83	2.64	3.72	A	915
	2.0+2.5+2.5	1.94	2.43	2.43	---	1.98	6.80	7.10	0.41	2.07	2.26	3.29	A	1035
	2.0+2.5+3.5	1.70	2.13	2.97	---	1.98	6.80	7.59	0.39	2.07	2.			

## COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
4MXS68F2V1B	2.0+2.5+5.0	1.43	1.79	3.58	---	1.98	6.80	7.92	0.39	2.02	2.74	337	A	1010
	2.0+2.5+6.0	1.30	1.62	3.88	---	2.33	6.80	8.38	0.45	1.83	2.84	372	A	915
	2.0+3.5+3.5	1.52	2.64	2.64	---	1.98	6.80	7.91	0.4	2.07	2.85	329	A	1035
	2.0+3.5+5.0	1.30	2.27	3.23	---	2.30	6.80	8.41	0.44	2.02	3.17	337	A	1010
	2.5+2.5+2.5	2.26	2.26	2.26	---	1.98	6.78	7.38	0.41	2.07	2.45	328	A	1035
	2.5+2.5+3.5	2.00	2.00	2.80	---	1.98	6.80	7.78	0.39	2.07	2.75	329	A	1035
	2.5+2.5+5.0	1.70	1.70	3.40	---	2.30	6.80	8.28	0.44	2.02	3.06	337	A	1010
	2.5+2.5+6.0	1.55	1.55	3.70	---	2.44	6.80	8.57	0.44	1.83	3.00	372	A	915
	2.5+3.5+3.5	1.78	2.51	2.51	---	2.29	6.80	8.14	0.44	2.07	3.06	329	A	1035
	2.5+3.5+5.0	1.55	2.16	3.09	---	2.51	6.80	8.57	0.46	1.98	3.33	343	A	990
	3.5+3.5+3.5	2.26	2.26	2.26	---	2.40	6.78	8.42	0.43	2.07	3.33	328	A	1035
	20+20+20+20	1.70	1.70	1.70	1.70	1.99	6.80	7.63	0.41	1.75	2.19	3.89	A	875
	20+20+20+25	1.60	1.60	1.60	2.00	1.99	6.80	7.79	0.39	1.73	2.29	3.93	A	865
	20+20+20+35	1.43	1.43	1.43	2.51	1.99	6.80	8.17	0.4	1.71	2.53	3.98	A	855
	20+20+20+50	1.24	1.24	1.24	3.08	2.47	6.80	8.74	0.46	1.67	2.93	4.07	A	835
	20+20+25+25	1.51	1.51	1.89	1.89	1.99	6.80	7.94	0.4	1.75	2.38	3.89	A	875
	20+20+25+35	1.36	1.36	1.70	2.38	2.34	6.80	8.32	0.45	1.73	2.63	3.93	A	865
	20+20+35+35	1.24	1.24	2.16	2.16	2.46	6.80	8.61	0.45	1.71	2.84	3.98	A	855
	20+25+25+25	1.43	1.79	1.79	1.79	1.99	6.80	8.17	0.4	1.75	2.53	3.89	A	875
	20+25+25+35	1.30	1.62	1.62	2.26	2.34	6.80	8.46	0.45	1.73	2.74	3.93	A	865
	25+25+25+25	1.70	1.70	1.70	2.15	2.34	6.80	8.39	0.46	1.71	2.68	3.98	A	855
	25+25+25+35	1.55	1.55	1.55	2.15	2.46	6.80	8.73	0.46	1.70	2.95	4.00	A	850

## HEATING

OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			EER	ENERGY LABEL
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX		
4MXS68F2V1B	2.0	2.72	---	---	---	1.51	2.72	3.93	0.44	0.74	1.27	3.68	A
	2.5	3.40	---	---	---	1.47	3.40	4.13	0.43	1.03	1.37	3.30	B
	3.5	4.30	---	---	---	1.48	4.30	4.52	0.41	1.42	1.61	3.03	D
	5.0	---	---	7.20	---	1.65	5.60	5.76	0.39	2.13	2.26	2.63	E
	6.0	---	---	7.90	---	1.92	7.90	8.57	0.41	2.65	2.72	2.98	D
	2.0+2.0	3.25	3.25	---	---	1.62	6.50	7.64	0.38	1.87	2.25	3.48	B
	2.0+2.5	3.04	3.81	---	---	1.62	6.85	7.81	0.38	2.05	2.33	3.34	C
	2.0+3.5	2.71	4.74	---	---	1.76	7.45	8.34	0.39	2.34	2.64	3.18	D
	2.0+5.0	2.46	---	6.14	---	2.14	8.60	10.15	0.48	2.80	3.26	3.07	D
	2.0+6.0	2.15	---	6.45	---	2.41	8.60	10.34	0.51	2.43	2.98	3.54	B
	2.5+2.5	3.60	3.60	---	---	1.62	7.20	8.16	0.38	2.24	2.56	3.21	C
	2.5+3.5	3.29	4.61	---	---	1.85	7.90	8.68	0.4	2.58	2.89	3.06	D
	2.5+5.0	2.87	---	5.73	---	2.23	8.60	10.27	0.49	2.80	3.33	3.07	D
	2.5+6.0	2.53	---	6.07	---	2.50	8.60	10.46	0.53	2.43	3.01	3.54	B
	3.5+3.5	4.30	4.30	---	---	2.13	8.60	9.02	0.45	2.93	3.11	2.94	D
	3.5+5.0	3.54	---	5.06	---	2.51	8.60	10.48	0.54	2.79	3.40	3.08	D
	3.5+6.0	3.17	---	5.43	---	2.69	8.60	10.59	0.55	2.42	3.00	3.55	B
	5.0+5.0	---	---	4.30	4.30	2.88	8.60	10.67	0.63	2.70	3.21	3.19	D
	5.0+6.0	---	---	3.91	4.69	3.08	8.60	10.66	0.64	2.39	2.96	3.60	B
	2.0+2.0+2.0	2.63	2.63	---	---	1.97	7.89	10.04	0.44	2.05	2.70	3.85	A
	2.0+2.0+2.5	2.54	2.54	3.17	---	2.06	8.25	10.12	0.45	2.18	2.74	3.78	A
	2.0+2.0+3.5	2.29	2.29	4.02	---	2.26	8.60	10.22	0.47	2.34	2.88	3.68	A
	2.0+2.0+5.0	1.91	1.91	4.78	---	2.66	8.60	10.40	0.58	2.34	2.96	3.68	A
	2.0+2.0+6.0	1.72	1.72	5.16	---	2.87	8.60	10.53	0.58	2.12	2.67	4.06	A
	2.0+2.5+2.5	2.46	3.07	3.07	---	2.16	8.60	10.13	0.46	2.35	2.84	3.66	A
	2.0+2.5+3.5	2.15	2.69	3.76	---	2.35	8.60	10.22	0.49	2.34	2.88	3.68	A
	2.0+2.5+5.0	1.81	2.26	4.53	---	2.75	8.60	10.63	0.6	2.32	2.99	3.71	A
	2.0+2.5+6.0	1.64	2.05	4.91	---	2.96	8.60	10.64	0.6	2.10	2.64	4.10	A
	2.0+3.5+3.5	1.92	3.34	3.34	---	2.64	8.60	10.35	0.55	2.31	2.93	3.72	A
	2.0+3.5+5.0	1.64	2.87	4.09	---	2.94	8.60	10.68	0.62	2.29	3.06	3.76	A
	2.5+2.5+2.5	2.86	2.86	2.86	---	2.26	8.58	10.24	0.48	2.35	2.87	3.65	A
	2.5+2.5+3.5	2.53	2.53	3.54	---	2.45	8.60	10.45	0.51	2.34	2.96	3.68	A
	2.5+2.5+5.0	2.15	2.15	4.30	---	2.85	8.60	10.64	0.62	2.29	3.02	3.76	A
	2.5+2.5+6.0	1.95	1.95	4.70	---	3.06	8.60	10.65	0.62	2.08	2.64	4.13	A
	2.5+3.5+3.5	2.26	3.17	3.17	---	2.73	8.60	10.58	0.56	2.31	2.96	3.72	A
	2.5+3.5+5.0	1.95	2.74	3.91	---	3.13	8.60	10.65	0.64	2.29	2.98	3.76	A
	3.5+3.5+3.5	2.86	2.86	2.86	---	2.92	8.58	10.63	0.61	2.29	3.03	3.75	A
	20+20+20+20	2.15	2.15	2.15	2.15	2.42	8.60	10.39	0.52	1.91	2.61	4.50	A
	20+20+20+25	2.02	2.02	2.02	2.54	2.52	8.60	10.48	0.53	1.91	2.57	4.50	A
	20+20+20+35	1.81	1.81	1.81	3.17	2.72	8.60	10.58	0.57	1.90	2.63	4.53	A
	20+20+20+50	1.56	1.56	1.56	3.92	3.04	8.60	10.65	0.63	1.86	2.54	4.62	A
	20+20+25+25	1.91	1.91	2.39	2.39	2.62	8.60	10.49	0.55	1.91	2.57	4.50	A
	20+20+25+35	1.72	1.72	2.15	3.01	2.92	8.60	10.59	0.6	1.90	2.63	4.53	A
	20+20+35+35	1.56	1.56	2.74	2.74	3.12	8.60	10.69	0.65	1.90	2.66	4.53	A
	20+25+25+25	1.82	2.26	2.26	2.26	2.72	8.60	10.49	0.57	1.91	2.57	4.50	A
	20+25+25+35	1.64	2.05	2.05	2.86	3.02	8.60	10.68	0.63	1.90	2.67	4.53	A
	25+25+25+25	2.15	2.15	2.15	2.15	2.82	8.60	10.67	0.57	1.91	2.59	4.50	A
	25+25+25+35	1.95	1.95	1.95	2.75	3.12	8.60	10.68	0.64	1.88	2.58	4.57	A

Note: Connected to 2.0, 2.5, 3.5, 5.0 class: wall mounted D type; 6.0 class: wall mounted F type

## COOLING

OUTDOOR UNIT	INDOOR UNIT	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX			
4MXS68F2V1B	2.0	2.00	---	---	---	1.95	2.00	2.63	0.44	0.47	0.62	4.26	A	235
	2.5	2.50	---	---	---	1.95	2.50	3.37	0.46	0.59	0.85	4.24	A	295
	3.5	3.50	---	---	---	1.95	3.50	4.76	0.47	0.91	1.47	3.85	A	455
	5.0	---	---	5.00	---	1.96	5.00	5.92	0.42	1.57	2.01	3.18	B	785
	6.0	---	---	6.00	---	1.96	6.00	6.38	0.44	2.05	2.32	2.93	C	1025
	2.0+2.0	2.00	2.00	---	---	1.97	4.00	5.02	0.43	1.00	1.45	4.00	A	500
	2.0+2.5	2.00	2.50	---	---	1.97	4.50	5.33	0.43	1.20	1.61	3.75	A	600
	2.0+3.5	2.00	3.50	---	---	1.97	5.50	6.18	0.42	1.66	2.15	3.31	A	830
	2.0+5.0	1.94	---	4.86	---	1.98	6.80	7.09	0.39	2.22	2.40	3.06	B	1110
	2.0+6.0	1.70	---	5.10	---	1.98	6.80	7.56	0.4	2.21	2.75	3.08	B	1105
	2.5+2.5	2.50	2.50	---	---	1.97	5.00	5.98	0.45	1.46	2.00	3.42	A	730
	2.5+3.5	2.50	3.50	---	---	1.97	6.00	6.44	0.43	2.06	2.37	2.91	C	1030
	2.5+5.0	2.27	---	4.53	---	1.98	6.80	7.22	0.38	2.22	2.50	3.06	B	1110
	2.5+6.0	2.00	---	4.80	---	1.98	6.80	7.56	0.38	2.21	2.75	3.08	B	1105
	3.5+3.5	3.40	3.40	---	---	1.97	6.80	6.99	0.41	2.51	2.66	2.71	D	1255
	3.5+5.0	2.80	---	4.00	---	1.98	6.80	7.65	0.36	2.22	2.85	3.06	B	1110
	3.5+6.0	2.51	---	4.29	---	2.28	6.80	7.91	0.43	2.21	3.06	3.08	B	1105
	5.0+5.0	---	---	3.40	3.40	2.31	6.80	8.10	0.41	1.99	2.76	3.42	A	995
	5.0+6.0	---	---	3.09	3.71	2.52	6.80	8.26	0.46	1.97	2.95	3.45	A	985
	2.0+2.0+2.0	2.00	2.00	2.00	---	1.98	6.00	6.51	0.42	1.64	1.89	3.66	A	820
	2.0+2.0+2.5	2.00	2.00	2.50	---	1.98	6.50	6.89	0.42	1.89	2.12	3.44	A	945
	2.0+2.0+3.5	1.81	1.81	3.18	---	1.98	6.80	7.25	0.41	2.07	2.35	3.29	A	1035
	2.0+2.0+5.0	1.51	1.51	3.78	---	1.99	6.80	7.87	0.37	1.88	2.49	3.62	A	940
	2.0+2.0+6.0	1.36	1.36	4.08	---	2.33	6.80	8.11	0.44	1.83	2.64	3.72	A	915
	2.0+2.5+2.5	1.94	2.43	2.43	---	1.98	6.80	7.10	0.41	2.07	2.26	3.29	A	1035
	2.0+2.5+3.5	1.70	2.13	2.97	---	1.98	6.80	7.59	0.39	2.07	2.59	3.29	A	1035
	2.0+2.5+5.0	1.43	1.79	3.58	---	1.99	6.80	7.94	0.36	1.88	2.54	3.62	A	940
	2.0+2.5+6.0	1.30	1.62	3.88	---	2.33	6.80	8.38	0.45	1.83	2.84	3.72	A	915
	2.0+3.5+3.5	1.52	2.64	2.64	---	1.98	6.80	7.91	0.4	2.07	2.85	3.29	A	1035
	2.0+3.5+5.0	1.30	2.27	3.23	---	2.33	6.80	8.35	0.41	1.88	2.84	3.62	A	940
	2.5+2.5+2.5	2.26	2.26	2.26	---	1.98	6.78	7.38	0.41	2.07	2.45	3.28	A	1035
	2.5+2.5+3.5	2.00	2.00	2.80	---	1.98	6.80	7.78	0.39	2.07	2.75	3.29	A	1035
	2.5+2.5+5.0	1.70	1.70	3.40	---	2.32	6.80	8.28	0.42	1.88	2.79	3.62	A	940
	2.5+2.5+6.0	1.55	1.55	3.70	---	2.44	6.80	8.57	0.44	1.83	3.00	3.72	A	915
	2.5+3.5+3.5	1.78	2.51	2.51	---	2.29	6.80	8.14	0.44	2.07	3.06	3.29	A	1035
	2.5+3.5+5.0	1.55	2.16	3.09	---	2.44	6.80	8.55	0.41	1.88	3.00	3.62	A	940
	3.5+3.5+3.5	2.26	2.26	2.26	---	2.40	6.78	8.42	0.43	2.07	3.33	3.28	A	1035
	2.0+2.0+2.0+2.0	1.70	1.70	1.70	1.70	1.99	6.80	7.63	0.41	1.75	2.19	3.89	A	875
	2.0+2.0+2.0+2.5	1.60	1.60	1.60	2.00	1.99	6.80	7.79	0.39	1.73	2.29	3.93	A	865
	2.0+2.0+2.0+3.5	1.43	1.43	1.43	2.51	1.99	6.80	8.17	0.4	1.71	2.53	3.98	A	855
	2.0+2.0+2.0+5.0	1.24	1.24	1.24	3.08	2.50	6.80	8.75	0.43	1.58	2.71	4.30	A	790
	2.0+2.0+2.5+2.5	1.51	1.51	1.89	1.89	1.99	6.80	7.94	0.4	1.75	2.38	3.89	A	875
	2.0+2.0+2.5+3.5	1.36	1.36	1.70	2.38	2.34	6.80	8.32	0.45	1.73	2.63	3.93	A	865
	2.0+2.0+3.5+3.5	1.24	1.24	2.16	2.16	2.46	6.80	8.61	0.45	1.71	2.84	3.98	A	855
	2.0+2.5+2.5+2.5	1.43	1.79	1.79	1.79	1.99	6.80	8.17	0.4	1.75	2.53	3.89	A	875
	2.0+2.5+2.5+3.5	1.30	1.62	1.62	2.26	2.34	6.80	8.46	0.45	1.73	2.74	3.93	A	865
	2.5+2.5+2.5+2.5	1.70	1.70	1.70	1.70	2.34	6.80	8.39	0.46	1.71	2.68	3.98	A	855
	2.5+2.5+2.5+3.5	1.55	1.55	1.55	2.15	2.46	6.80	8.73	0.46	1.70	2.95	4.00	A	850

## HEATING

OUTDOOR UNIT	INDOOR UNIT	HEATING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			EER	ENERGY LABEL
		A ROOM	B ROOM	C ROOM	D ROOM	MIN	NOM	MAX	MIN	NOM	MAX		
4MXS68F2V1B	2.0	2.72	---	---	---	1.51	2.72	3.93	0.44	0.74	1.27	3.68	A
	2.5	3.40	---	---	---	1.47	3.40	4.13	0.43	1.03	1.37	3.30	C
	3.5	4.30	---	---	---	1.48	4.30	4.52	0.41	1.42	1.61	3.03	D
	5.0	---	---	7.20	---	1.69	5.60	5.71	0.40	1.84	1.96	3.04	D
	6.0	---	---	7.90	---	1.92	7.90	8.57	0.41	2.65	2.72	2.98	D
	2.0+2.0	3.25	3.25	---	---	1.62	6.50	7.64	0.38	1.87	2.25	3.48	B
	2.0+2.5	3.04	3.81	---	---	1.62	6.85	7.81	0.38	2.05	2.33	3.34	C
	2.0+3.5	2.71	4.74	---	---	1.76	7.45	8.34	0.39	2.34	2.64	3.18	D
	2.0+5.0	2.46	---	6.14	---	2.11	8.60	10.16	0.43	2.50	2.91	3.44	B
	2.0+6.0	2.15	---	6.45	---	2.41	8.60	10.34	0.51	2.43	2.98	3.54	B
	2.5+2.5	3.60	3.60	---	---	1.62	7.20	8.16	0.38	2.24	2.56	3.21	C
	2.5+3.5	3.29	4.61	---	---	1.85	7.90	8.68	0.40	2.58	2.89	3.06	D
	2.5+5.0	2.87	---	5.73	---	2.21	8.60	10.28	0.45	2.50	2.97	3.44	B
	2.5+6.0	2.53	---	6.07	---	2.50	8.60	10.46	0.53	2.43	3.01	3.54	B
	3.5+3.5	4.30	4.30	---	---	2.13	8.60	9.02	0.45	2.93	3.11	2.94	D
	3.5+5.0	3.54	---	5.06	---	2.49	8.60	10.41	0.49	2.49	3.00	3.45	B
	3.5+6.0	3.17	---	5.43	---	2.69	8.60	10.59	0.55	2.42	3.00	3.55	B
	5.0+5.0	---	---	4.30	4.30	2.88	8.60	10.60	0.52	2.16	2.55	3.98	A
	5.0+6.0	---	---	3.91	4.69	3.09	8.60	10.68	0.57	2.14	2.67	4.02	A
	2.0+2.0+2.0	2.63	2.63	2.63	---	1.97	7.89	10.04	0.44	2.05	2.70	3.85	A
	2.0+2.0+2.5	2.54	2.54	3.17	---	2.06	8.25	10.12	0.45	2.18	2.74	3.78	A
	2.0+2.0+3.5	2.29	2.29	4.02	---	2.26	8.60	10.22	0.47	2.34	2.88	3.68	A
	2.0+2.0+5.0	1.91	1.91	4.78	---	2.66	8.60	10.42	0.51	2.18	2.67	3.94	A
	2.0+2.0+6.0	1.72	1.72	5.16	---	2.87	8.60	10.53	0.58	2.12	2.67	4.06	A
	2.0+2.5+2.5	2.46	3.07	3.07	---	2.16	8.60	10.13	0.46	2.35	2.84	3.66	A
	2.0+2.5+3.5	2.15	2.69	3.76	---	2.35	8.60	10.22	0.49	2.34	2.88	3.68	A
	2.0+2.5+5.0	1.81	2.26	4.53	---	2.75	8.60	10.66	0.53	2.12	2.69	4.06	A
	2.0+2.5+6.0	1.64	2.05	4.91	---	2.96	8.60	10.64	0.60	2.10	2.64	4.10	A
	2.0+3.5+3.5	1.92	3.34	3.34	---	2.64	8.60	10.35	0.55	2.31	2.93	3.72	A
	2.0+3.5+5.0	1.64	2.87	4.09	---	2.95	8.60	10.70	0.55	2.05	2.76	4.20	A
	2.5+2.5+2.5	2.86	2.86	2.86	---	2.26	8.58	10.24	0.48	2.35	2.87	3.65	A
	2.5+2.5+3.5	2.53	2.53	3.54	---	2.45	8.60	10.45	0.51	2.34	2.96	3.68	A
	2.5+2.5+5.0	2.15	2.15	4.30	---	2.85	8.60	10.66	0.54	2.10	2.72	4.10	A
	2.5+2.5+6.0	1.95	1.95	4.70	---	3.06	8.60	10.65	0.62	2.08	2.64	4.13	A
	2.5+3.5+3.5	2.26	3.17	3.17	---	2.73	8.60	10.58	0.56	2.31	2.96	3.72	A
	2.5+3.5+5.0	1.95	2.74	3.91	---	3.05	8.60	10.67	0.54	2.05	2.69	4.20	A
	3.5+3.5+3.5	2.86	2.86	2.86	---	2.92	8.58	10.63	0.61	2.29	3.03	3.75	A
	2.0+2.0+2.0+2.0	2.15	2.15	2.15	2.15	2.42	8.60	10.39	0.52	1.91	2.61	4.50	A
	2.0+2.0+2.0+2.5	2.02	2.02	2.02	2.54	2.52	8.60	10.48	0.53	1.91	2.57	4.50	A
	2.0+2.0+2.0+3.5	1.81	1.81	1.81	3.17	2.72	8.60	10.58	0.57	1.90	2.63	4.53	A
	2.0+2.0+2.0+5.0	1.56	1.56	1.56	3.92	3.06	8.60	10.68	0.60	1.82	2.45	4.73	A
	2.0+2.0+2.5+2.5	1.91	1.91	2.39	2.39	2.62	8.60	10.49	0.55	1.91	2.57	4.50	A
	2.0+2.0+2.5+3.5	1.72	1.72	2.15	3.01	2.92	8.60	10.59	0.60	1.90	2.63	4.53	A
	2.0+2.0+3.5+3.5	1.56	1.56	2.74	2.74	3.12	8.60	10.69	0.65	1.90	2.66	4.53	A
	2.0+2.5+2.5+2.5	1.82	2.26	2.26	2.26	2.72	8.60	10.49	0.57	1.91	2.57	4.50	A
	2.0+2.5+2.5+3.5	1.64	2.05	2.05	2.86	3.02	8.60	10.68	0.63	1.90	2.67	4.53	A
	2.5+2.5+2.5+2.5	2.15	2.15	2.15	2.15	2.82	8.60	10.67	0.57	1.91	2.59	4.50	A
	2.5+2.5+2.5+3.5	1.95	1.95	1.95	2.75	3.12	8.60	10.68	0.64	1.88	2.58	4.57	A

Note: Connected to 2.0, 2.5, 3.5 class: wall mounted D type; 5.0, 6.0 class: wall mounted F type

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX			
4MXS80E7V3B	2.0	2.00	---	---	---	1.80	2.00	2.99	0.46	0.60	1.07	333	A	300
	2.5	2.50	---	---	---	1.87	2.50	3.52	0.49	0.78	1.35	321	A	390
	3.5	3.50	---	---	---	1.91	3.50	4.85	0.49	1.19	1.57	294	C	595
	5.0	5.00	---	---	---	2.07	5.00	5.65	0.47	1.67	1.81	299	C	835
	6.0	6.00	---	---	---	2.17	6.00	6.60	0.47	2.01	2.43	299	C	1005
	7.1	7.10	---	---	---	2.28	7.10	7.26	0.50	2.71	2.83	262	D	1355
	20+20	2.00	2.00	---	---	1.97	4.00	5.30	0.47	1.19	1.67	336	A	595
	20+25	2.00	2.50	---	---	2.02	4.50	5.73	0.47	1.36	1.81	331	A	680
	20+35	2.00	3.50	---	---	2.12	5.50	6.38	0.47	1.81	2.11	304	B	905
	20+50	2.00	5.00	---	---	2.27	7.00	7.30	0.51	2.36	2.53	297	C	1180
	20+60	1.83	5.48	---	---	2.41	7.31	7.90	0.51	2.53	2.96	289	C	1265
	20+71	1.66	5.90	---	---	2.56	7.56	8.22	0.54	2.69	3.16	281	C	1345
	25+25	2.50	2.50	---	---	2.07	5.00	6.17	0.43	1.44	2.11	347	A	720
	25+35	2.50	3.50	---	---	2.17	6.00	6.60	0.47	2.01	2.37	299	C	1005
	25+50	2.40	4.79	---	---	2.34	7.19	7.59	0.51	2.47	2.77	291	C	1235
	25+60	2.18	5.24	---	---	2.48	7.42	8.03	0.54	2.59	3.03	286	C	1295
	25+71	2.00	5.68	---	---	2.63	7.68	8.22	0.58	2.73	3.16	281	C	1365
	35+35	3.50	3.50	---	---	2.27	7.00	7.27	0.50	2.65	2.83	264	D	1325
	35+50	3.06	4.36	---	---	2.48	7.42	8.01	0.54	2.65	3.03	280	D	1325
	35+60	2.82	4.83	---	---	2.61	7.65	8.54	0.58	2.70	3.56	283	C	1350
	35+71	2.61	5.30	---	---	2.77	7.91	8.23	0.61	2.97	3.16	266	D	1485
	50+50	3.88	3.88	---	---	2.68	7.76	8.76	0.58	2.58	3.24	301	B	1290
	50+60	3.64	4.36	---	---	2.82	8.00	8.79	0.61	2.71	3.25	295	C	1355
	50+71	3.31	4.69	---	---	2.97	8.00	8.99	0.65	2.71	339	295	C	1355
	60+60	4.00	4.00	---	---	2.96	8.00	9.00	0.61	2.65	3.39	302	B	1325
	60+71	3.66	4.34	---	---	3.11	8.00	9.02	0.65	2.59	3.39	309	B	1295
4MXS80E7V3B	7.1-7.1	4.00	4.00	---	---	3.26	8.00	9.04	0.68	2.53	3.40	316	B	1265
	20+2.0+2.0	2.00	2.00	2.00	---	2.17	6.00	6.63	0.51	1.78	2.09	337	A	890
	20+2.0+2.5	2.00	2.00	2.50	---	2.22	6.50	6.95	0.51	2.03	2.31	320	A	1015
	20+2.0+3.5	1.92	1.92	3.35	---	2.34	7.19	7.61	0.51	2.48	2.72	290	C	1240
	20+2.0+5.0	1.68	1.68	4.18	---	2.55	7.54	8.40	0.55	2.40	2.97	314	B	1200
	20+2.0+6.0	1.55	1.55	4.67	---	2.68	7.77	8.82	0.58	2.53	3.25	307	B	1265
	20+2.0+7.1	1.44	1.44	5.12	---	2.83	8.00	9.03	0.61	2.65	3.40	302	B	1325
	20+2.5+2.5	2.00	2.50	2.50	---	2.27	7.00	7.30	0.51	2.36	2.54	297	C	1180
	20+2.5+3.5	1.83	2.28	3.20	---	2.41	7.31	7.90	0.51	2.54	2.97	288	C	1270
	20+2.5+5.0	1.61	2.01	4.03	---	2.61	7.65	8.62	0.55	2.46	3.11	311	B	1230
	20+2.5+6.0	1.50	1.88	4.50	---	2.75	7.88	8.84	0.58	2.59	3.25	304	B	1295
	20+2.5+7.1	1.38	1.72	4.90	---	2.90	8.00	9.03	0.61	2.65	3.40	302	B	1325
	20+3.5+3.5	1.68	2.93	2.93	---	2.55	7.54	8.23	0.54	2.72	3.16	277	D	1360
	20+3.5+5.0	1.50	2.63	3.75	---	2.75	7.88	8.81	0.58	2.58	3.25	305	B	1290
	20+3.5+6.0	1.39	2.43	4.18	---	2.89	8.00	9.02	0.61	2.59	339	309	B	1295
	20+3.5+7.1	1.27	2.22	4.51	---	3.04	8.00	9.07	0.65	2.53	340	316	B	1265
	20+5.0+5.0	1.34	3.33	3.33	---	2.96	8.00	9.39	0.62	2.38	333	336	A	1190
	20+5.0+6.0	1.23	3.08	3.69	---	3.09	8.00	9.54	0.65	2.32	348	345	A	1160
	20+5.0+7.1	1.13	2.84	4.03	---	3.25	8.00	9.60	0.65	2.26	349	354	A	1130
	20+6.0+6.0	1.14	3.43	3.43	---	3.23	8.00	9.60	0.65	2.38	349	336	A	1190
	25+2.5+2.5	2.40	2.40	2.40	---	2.34	7.20	7.61	0.51	2.48	2.72	290	C	1240
	25+2.5+3.5	2.18	2.18	3.06	---	2.48	7.42	8.05	0.54	2.60	3.03	285	C	1300
	25+2.5+5.0	1.94	1.94	3.89	---	2.68	7.77	8.80	0.58	2.52	3.24	308	B	1260
	25+2.5+6.0	1.82	1.82	4.36	---	2.82	8.00	8.84	0.61	2.65	3.25	302	B	1325
	25+2.5+7.1	1.65	1.65	4.70	---	2.97	8.00	9.03	0.61	2.59	340	309	B	1295
	25+3.5+3.5	2.01	2.82	2.82	---	2.61	7.65	8.34	0.58	2.78	3.09	275	D	1390
	25+3.5+5.0	1.81	2.55	3.64	---	2.82	8.00	8.81	0.61	2.71	3.25	295	C	1355
	25+3.5+6.0	1.67	2.33	4.00	---	2.96	8.00	9.02	0.61	2.65	339	302	B	1325
	25+3.5+7.1	1.52	2.14	4.34	---	3.11	8.00	9.07	0.65	2.59	340	309	B	1295
	25+5.0+5.0	1.60	3.20	3.20	---	3.03	8.00	9.47	0.62	2.38	340	336	A	1190
	25+5.0+6.0	1.48	2.96	3.56	---	3.16	8.00	9.58	0.65	2.32	348	345	A	1160
	25+6.0+6.0	1.38	3.31	3.31	---	3.30	8.00	9.60	0.68	2.26	349	354	A	1130
4MXS80E7V3B	35+3.5+3.5	2.63	2.63	2.63	---	2.75	7.89	8.58	0.61	2.90	316	272	D	1450
	35+3.5+5.0	2.33	2.33	3.34	---	2.96	8.00	8.99	0.61	2.71	339	295	C	1355
	35+3.5+6.0	2.15	2.15	3.70	---	3.09	8.00	9.07	0.65	2.65	339	302	B	1325
	35+3.5+7.1	1.99	1.99	4.02	---	3.25	8.00	9.05	0.68	2.59	340	309	B	1295

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)				TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX			
4MXS80E7V3B	35+5+5.0	2.08	2.96	2.96	---	3.16	8.00	9.58	0.65	2.38	3.48	3.36	A	1190
	35+5+6.0	1.93	2.76	3.31	---	3.30	8.00	9.60	0.68	2.32	3.49	3.45	A	1160
	20+20+20+20	1.83	1.83	1.83	1.83	2.41	7.32	7.90	0.52	2.11	2.46	3.47	A	1055
	20+20+20+25	1.75	1.75	1.75	2.17	2.48	7.42	8.16	0.55	2.17	2.59	3.42	A	1085
	20+20+20+35	1.61	1.61	1.61	2.82	2.61	7.65	8.62	0.55	2.29	2.91	3.34	A	1145
	20+20+20+50	1.45	1.45	1.45	3.65	2.82	8.00	9.15	0.59	2.38	3.12	3.36	A	1190
	20+20+20+60	1.33	1.33	1.33	4.01	2.96	8.00	9.39	0.62	2.32	3.34	3.45	A	1160
	20+20+20+71	1.22	1.22	1.22	4.34	3.11	8.00	9.55	0.65	2.26	3.42	3.54	A	1130
	20+20+25+25	1.68	1.68	2.09	2.09	2.55	7.54	8.40	0.55	2.23	2.78	3.38	A	1115
	20+20+25+35	1.55	1.55	1.94	2.73	2.68	7.77	8.82	0.58	2.53	3.25	3.07	B	1265
	20+20+25+50	1.39	1.39	1.74	3.48	2.89	8.00	9.28	0.59	2.38	3.26	3.36	A	1190
	20+20+25+60	1.28	1.28	1.60	3.84	3.03	8.00	9.47	0.62	2.32	3.34	3.45	A	1160
	20+20+25+71	1.18	1.18	1.47	4.17	3.18	8.00	9.59	0.65	2.26	3.50	3.54	A	1130
	20+20+35+35	1.45	1.45	2.55	2.55	2.82	8.00	8.86	0.61	2.65	3.25	3.02	B	1325
	20+20+35+50	1.28	1.28	2.24	3.20	3.03	8.00	9.47	0.62	2.38	3.41	3.36	A	1190
	20+20+35+60	1.19	1.19	2.07	3.55	3.16	8.00	9.58	0.65	2.32	3.49	3.45	A	1160
	20+20+50+50	1.14	1.14	2.86	2.86	3.23	8.00	9.60	0.65	2.15	3.11	3.72	A	1075
	20+25+25+25	1.62	2.01	2.01	2.61	7.65	8.62	0.55	2.29	2.91	3.34	A	1145	
	20+25+25+35	1.50	1.88	1.88	2.62	2.75	7.88	8.86	0.58	2.59	3.25	3.04	B	1295
	20+25+25+50	1.33	1.67	1.67	3.33	2.96	8.00	9.39	0.62	2.38	3.34	3.36	A	1190
	20+25+25+60	1.23	1.54	1.54	3.69	3.09	8.00	9.54	0.65	2.35	3.42	3.40	A	1175
	20+25+25+71	1.13	1.42	1.42	4.03	3.25	8.00	9.60	0.65	2.32	3.50	3.45	A	1160
	20+25+35+35	1.40	1.74	2.43	2.43	2.89	8.00	9.09	0.61	2.65	3.40	3.02	B	1325
	20+25+35+50	1.23	1.54	2.15	3.08	3.09	8.00	9.54	0.65	2.38	3.49	3.36	A	1190
	20+25+35+60	1.14	1.43	2.00	3.43	3.23	8.00	9.60	0.65	2.32	3.49	3.45	A	1160
	20+25+50+50	1.10	1.38	2.76	2.76	3.30	8.00	9.60	0.65	2.11	3.11	3.79	A	1055
4MXS80E7V3B	20+35+35+35	1.28	2.24	2.24	3.03	8.00	9.23	0.65	2.65	3.40	3.02	B	1325	
	20+35+35+50	1.14	2.00	2.00	2.86	3.23	8.00	9.60	0.65	2.38	3.49	3.36	A	1190
	25+25+25+25	1.94	1.94	1.94	1.94	2.68	7.76	8.82	0.58	2.53	3.25	3.07	B	1265
	25+25+25+35	1.82	1.82	2.54	2.82	8.00	8.92	0.61	2.65	3.25	3.02	B	1325	
	25+25+25+50	1.60	1.60	1.60	3.20	3.03	8.00	9.47	0.62	2.38	3.41	3.36	A	1190
	25+25+25+60	1.48	1.48	1.48	3.56	3.16	8.00	9.58	0.65	2.32	3.49	3.45	A	1160
	25+25+35+35	1.67	1.67	2.33	2.33	2.96	8.00	9.04	0.61	2.65	3.40	3.02	B	1325
	25+25+35+50	1.48	1.48	2.07	2.97	3.16	8.00	9.58	0.65	2.38	3.49	3.36	A	1190
	25+25+35+60	1.38	1.38	1.93	3.31	3.30	8.00	9.60	0.68	2.32	3.49	3.45	A	1160
	25+35+35+35	1.55	2.15	2.15	3.09	8.00	9.34	0.65	2.65	3.40	3.02	B	1325	
	25+35+35+50	1.38	1.93	1.93	2.76	3.30	8.00	9.60	0.68	2.38	3.49	3.36	A	1190
	35+35+35+35	2.00	2.00	2.00	3.23	8.00	9.05	0.68	2.65	3.40	3.02	B	1325	

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)				TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			COP	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX		
4MXS80E7V3B	2.0	2.44	---	---	---	1.31	2.44	4.10	0.33	0.71	1.29	3.44	B
	2.5	3.05	---	---	---	1.36	3.05	4.55	0.35	0.93	1.39	3.28	C
	3.5	4.27	---	---	---	1.48	4.27	4.94	0.36	1.51	1.79	2.83	D
	5.0	6.09	---	---	---	1.90	6.09	6.92	0.44	1.83	2.23	3.33	C
	6.0	7.31	---	---	---	2.19	7.31	7.92	0.58	2.32	2.63	3.15	D
	7.1	8.65	---	---	---	2.50	8.65	8.70	0.62	2.94	2.97	2.94	D
	20+20	2.44	2.44	---	---	1.62	4.88	6.55	0.36	1.24	1.85	3.94	A
	20+25	2.44	3.05	---	---	1.76	5.49	6.85	0.40	1.43	1.93	3.84	A
	20+35	2.44	4.26	---	---	2.05	6.70	7.35	0.46	1.97	2.26	3.40	B
	20+50	2.44	6.09	---	---	2.47	8.53	8.53	0.56	2.40	2.40	3.55	B
	20+60	2.32	6.95	---	---	2.74	9.27	9.35	0.60	2.59	2.64	3.58	B
	20+7.1	2.11	7.49	---	---	3.04	9.60	10.02	0.64	2.63	2.84	3.65	A
	25+25	3.04	3.04	---	---	1.90	6.08	6.92	0.44	1.79	2.17	3.40	C
	25+35	3.05	4.26	---	---	2.19	7.31	8.24	0.58	2.26	2.67	3.23	C
	25+50	2.98	5.95	---	---	2.61	8.93	9.14	0.58	2.55	2.66	3.50	B
	25+60	2.82	6.78	---	---	2.88	9.60	9.77	0.62	2.81	2.94	3.42	B
	25+7.1	2.50	7.10	---	---	3.17	9.60	10.02	0.67	2.66	2.88	3.61	A
	35+35	4.26	4.26	---	---	2.47	8.52	8.87	0.63	2.87	3.11	2.97	D
	35+50	3.95	5.65	---	---	2.88	9.60	9.74	0.63	2.81	2.87	3.42	B
	35+60	3.54	6.06	---	---	3.15	9.60	10.00	0.65	2.64	2.85	3.64	A
	35+7.1	3.17	6.43	---	---	3.45	9.60	10.03	0.72	2.58	2.78	3.72	A
	50+5.0	4.80	4.80	---	---	3.28	9.60	10.27	0.63	2.44	2.76	3.93	A
	50+6.0	4.36	5.24	---	---	3.55	9.60	10.31	0.67	2.43	2.74	3.95	A
	50+7.1	3.97	5.63	---	---	3.85	9.60	10.34	0.71	2.42	2.73	3.97	A
	60+6.0	4.80	4.80	---	---	3.82	9.60	10.35	0.71	2.46	2.78	3.90	A
	60+7.1	4.40	5.20	---	---	4.12	9.60	10.38	0.76	2.45	2.77	3.92	A
4MXS80E7V3B	7.1+7.1	4.80	4.80	---	---	4.42	9.60	10.41	0.83	2.39	2.70	4.02	A
	20+20+2.0	2.43	2.43	2.43	---	2.19	7.29	8.05	0.51	1.87	2.17	3.90	A
	20+20+2.5	2.44	2.44	3.04	---	2.33	7.92	8.64	0.53	2.08	2.36	3.81	A
	20+20+3.5	2.38	2.38	4.17	---	2.61	8.93	9.37	0.58	2.43	2.64	3.67	A
	20+20+5.0	2.13	2.13	5.34	---	3.01	9.60	10.32	0.58	2.42	2.74	3.97	A
	20+20+6.0	1.92	1.92	5.76	---	3.28	9.60	10.35	0.61	2.41	2.72	3.98	A
	20+20+7.1	1.73	1.73	6.14	---	3.58	9.60	10.39	0.66	2.40	2.71	4.00	A
	20+25+2.5	2.43	3.05	3.05	---	2.47	8.53	8.64	0.56	2.29	2.34	3.72	A
	20+25+3.5	2.31	2.90	4.06	---	2.74	9.27	9.37	0.60	2.56	2.61	3.62	A
	20+25+5.0	2.02	2.53	5.05	---	3.15	9.60	10.32	0.60	2.42	2.74	3.97	A

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)				TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			COP	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX		
		20+50+50	160	400	400	---	3.82	9.60	10.64	0.64	2.26	2.67	425
4MXS80E7V3B	20+50+6.0	148	369	443	---	4.09	9.60	10.67	0.70	2.25	2.66	427	A
	20+50+7.1	137	340	483	---	4.39	9.60	10.71	0.74	2.24	2.64	429	A
	20+60+6.0	138	411	411	---	4.36	9.60	10.71	0.74	2.23	2.64	430	A
	25+25+25	297	297	297	---	2.61	8.91	9.55	0.58	2.48	2.74	359	B
	25+25+3.5	282	282	396	---	2.88	9.60	9.78	0.62	2.69	2.79	357	B
	25+25+5.0	240	240	480	---	3.28	9.60	10.32	0.62	2.42	2.74	397	A
	25+25+6.0	218	218	524	---	3.55	9.60	10.35	0.66	2.41	2.72	398	A
	25+25+7.1	198	198	564	---	3.85	9.60	10.39	0.70	2.40	2.71	400	A
	25+35+3.5	252	354	354	---	3.15	9.60	10.01	0.64	2.58	2.79	372	A
	25+35+5.0	219	305	436	---	3.55	9.60	10.32	0.67	2.42	2.74	397	A
	25+35+6.0	200	280	480	---	3.82	9.60	10.36	0.71	2.41	2.72	398	A
	25+35+7.1	184	256	520	---	4.12	9.60	10.39	0.75	2.40	2.71	400	A
	25+50+5.0	192	384	384	---	3.96	9.60	10.64	0.68	2.26	2.67	425	A
	25+50+6.0	177	356	427	---	4.23	9.60	10.67	0.73	2.25	2.66	427	A
	25+60+6.0	166	397	397	---	4.50	9.60	10.71	0.77	2.23	2.64	430	A
	35+35+3.5	320	320	320	---	3.42	9.60	10.02	0.69	2.58	2.79	372	A
	35+35+5.0	280	280	400	---	3.82	9.60	10.33	0.71	2.42	2.73	397	A
	35+35+6.0	258	258	444	---	4.09	9.60	10.37	0.76	2.40	2.72	400	A
	35+35+7.1	238	238	484	---	4.39	9.60	10.40	0.80	2.39	2.71	402	A
	35+50+5.0	248	356	356	---	4.23	9.60	10.64	0.73	2.26	2.67	425	A
	35+50+6.0	232	331	397	---	4.50	9.60	10.68	0.78	2.25	2.65	427	A
	20+20+20+20	232	232	232	232	2.74	9.28	9.45	0.51	2.41	2.51	385	A
	20+20+20+25	226	226	226	282	2.88	9.60	9.60	0.55	2.51	2.51	382	A
	20+20+20+35	202	202	354	354	3.15	9.60	10.37	0.59	2.41	2.72	398	A
	20+20+20+50	175	175	175	435	3.55	9.60	10.68	0.58	2.25	2.65	427	A
4MXS80E7V3B	20+20+20+60	160	160	160	480	3.82	9.60	10.72	0.62	2.23	2.64	430	A
	20+20+20+7.1	147	147	147	519	4.12	9.60	10.75	0.69	2.22	2.63	432	A
	20+20+25+25	213	213	267	267	3.01	9.60	10.36	0.57	2.41	2.72	398	A
	20+20+25+3.5	192	240	336	336	3.28	9.60	10.37	0.61	2.41	2.72	398	A
	20+20+25+5.0	167	167	209	417	3.69	9.60	10.68	0.61	2.25	2.65	427	A
	20+20+25+6.0	154	154	192	460	3.96	9.60	10.72	0.64	2.23	2.64	430	A
	20+20+25+7.1	141	141	176	502	4.26	9.60	10.75	0.71	2.22	2.63	432	A
	20+20+35+3.5	175	175	305	305	3.55	9.60	10.38	0.66	2.40	2.72	400	A
	20+20+35+5.0	154	154	269	383	3.96	9.60	10.69	0.67	2.24	2.65	429	A
	20+20+35+6.0	142	142	249	427	4.23	9.60	10.73	0.72	2.23	2.64	430	A
	20+20+50+5.0	137	137	343	343	4.36	9.60	11.00	0.66	2.09	2.59	459	A
	20+25+25+25	201	253	253	315	9.60	10.36	0.59	2.41	2.72	398	A	
	20+25+25+3.5	182	229	229	320	3.42	9.60	10.37	0.64	2.41	2.72	398	A
	20+25+25+5.0	160	200	200	400	3.82	9.60	10.68	0.63	2.25	2.65	427	A
	20+25+25+6.0	147	185	185	443	4.09	9.60	10.72	0.69	2.23	2.64	430	A
	20+25+25+7.1	137	170	483	439	9.60	10.75	0.74	2.22	2.63	432	A	
	20+25+35+3.5	167	209	292	292	3.69	9.60	10.38	0.68	2.40	2.72	400	A
4MXS80E7V3B	20+25+35+5.0	148	185	258	3.69	4.09	9.60	10.69	0.70	2.24	2.65	429	A
	20+25+35+6.0	138	171	240	411	4.36	9.60	10.73	0.74	2.23	2.64	430	A
	20+25+50+5.0	132	166	331	331	4.50	9.60	11.00	0.71	2.09	2.59	459	A
	20+35+35+3.5	153	269	269	269	3.96	9.60	10.38	0.73	2.40	2.71	400	A
	20+35+35+5.0	137	240	240	343	4.36	9.60	10.70	0.75	2.24	2.65	429	A
	25+25+25+25	240	240	240	328	9.60	10.36	0.61	2.41	2.72	398	A	
	25+25+25+3.5	218	218	306	355	9.60	10.37	0.66	2.41	2.72	398	A	
	25+25+25+5.0	192	192	384	384	3.96	9.60	10.68	0.68	2.25	2.65	427	A
	25+25+25+6.0	178	178	426	426	9.60	10.72	0.72	2.23	2.64	430	A	
	25+25+35+3.5	200	200	280	280	3.82	9.60	10.38	0.71	2.40	2.72	400	A
	25+25+35+5.0	178	249	355	423	9.60	10.69	0.72	2.24	2.65	429	A	
	25+25+35+6.0	166	166	232	396	4.50	9.60	10.73	0.77	2.23	2.64	430	A
	25+35+35+3.5	186	258	258	409	9.60	10.38	0.76	2.40	2.71	400	A	
	25+35+35+5.0	165	232	331	450	9.60	10.70	0.77	2.24	2.65	429	A	
	35+35+35+3.5	240	240	240	436	9.60	10.39	0.81	2.40	2.71	400	A	

Note: Connected to 2.0, 2.5, 3.5 class : wall mounted D type / 5.0, 6.0, 7.1 class : wall mounted E type

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)				TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX			
		2.0	2.00	---	---	1.62	2.00	2.96	0.42	0.60	0.86	333	A	300
4MXS80E7V3B	2.5	250	---	---	---	1.66	2.50	3.43	0.46	0.77	1.06	325	A	385
	3.5	350	---	---	---	1.70	3.50	4.80	0.48	1.18	1.61	297	C	590
	5.0	500	---	---	---	1.84	5.00	5.92	0.43	1.54	1.92	325	A	770
	6.0	600	---	---	---	1.92	6.00	6.55	0.42	2.01	2.20	299	C	1005
	7.1	710	---	---	---	2.03	7.10	7.22	0.43	2.69	2.76	264	D	1345
	20+20	200	200	---	---	1.76	4.00	5.30	0.44	1.15	1.64	348	A	575
	20+25	200	250	---	---	1.80	4.50	5.73	0.44	1.35	1.86	333	A	675
	20+35	200	350	---	---	1.88	5.50	6.31	0.45	1.88	2.21	293	C	940
	20+50	200	500	---	---	2.02	7.00	7.16	0.48	2.37	2.45	295	C	1185
	20+60	183	548	---	---	2.12	7.31	7.64	0.48	2.52	2.66	290	C	1260
	20+71	166	590	---	---	2.24	7.56	7.90	0.48	2.65	2.79	285	C	1325
	25+25	250	250	---	---	1.84	5.00	6.12	0.44	1.61	2.09	311	B	805
	25+35	250	350	---	---	1.92	6.00	6.60	0.44	2.16	2.42	278	D	1080
	25+50	240	479	---	---	2.07	7.19	7.42	0.48	2.50	2.62	288	C	1250
	25+60	218	524	---	---	2.17	7.42	7.76	0.48	2.62	2.76	283	C	1310
	25+71	200	568	---	---	2.29	7.68	8.12	0.47	2.74	2.97	280	C	1370

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX			
4MXS80E7V3B	5.0+5.0	3.88	3.88	---	---	2.68	7.76	8.80	0.58	252	324	3.08	B	1260
	5.0+6.0	3.64	4.36	---	---	2.82	8.00	8.84	0.61	265	325	3.02	B	1325
	5.0+7.1	3.31	4.69	---	---	2.97	8.00	9.03	0.61	265	339	3.02	B	1325
	6.0+6.0	4.00	4.00	---	---	2.96	8.00	9.05	0.61	265	339	3.02	B	1325
	6.0+7.1	3.66	4.34	---	---	3.11	8.00	9.07	0.65	259	339	3.09	B	1295
	7.1+7.1	4.00	4.00	---	---	3.26	8.00	9.09	0.68	253	340	3.16	B	1265
	2.0+2.0+2.0	2.00	2.00	2.00	---	2.17	6.00	6.63	0.51	177	2.14	3.39	A	885
	2.0+2.0+2.5	2.00	2.00	2.50	---	2.22	6.50	6.95	0.48	203	2.30	3.20	A	1015
	2.0+2.0+3.5	1.92	1.92	3.35	---	2.34	7.19	7.61	0.51	247	2.77	2.91	C	1235
	2.0+2.0+5.0	1.68	1.68	4.18	---	2.55	7.54	8.40	0.55	240	2.96	3.14	B	1200
	2.0+2.0+6.0	1.55	1.55	4.67	---	2.68	7.77	8.82	0.58	252	324	3.08	B	1260
	2.0+2.0+7.1	1.44	1.44	5.12	---	2.83	8.00	9.03	0.61	265	339	3.02	B	1325
	2.0+2.5+2.5	2.00	2.50	2.50	---	2.27	7.00	7.30	0.48	236	2.53	2.97	C	1180
	2.0+2.5+3.5	1.83	2.28	3.20	---	2.41	7.31	7.90	0.51	253	2.96	2.89	C	1265
	2.0+2.5+5.0	1.61	2.01	4.03	---	2.61	7.65	8.62	0.55	246	3.17	3.11	B	1230
	2.0+2.5+6.0	1.50	1.88	4.50	---	2.75	7.88	8.83	0.58	258	324	3.05	B	1290
	2.0+2.5+7.1	1.38	1.72	4.90	---	2.90	8.00	9.03	0.61	265	339	3.02	B	1325
	2.0+3.5+3.5	1.68	2.93	2.93	---	2.55	7.54	8.18	0.54	271	3.15	2.78	D	1355
	2.0+3.5+5.0	1.50	2.63	3.75	---	2.75	7.88	8.80	0.58	258	324	3.05	B	1290
	2.0+3.5+6.0	1.39	2.43	4.18	---	2.89	8.00	9.01	0.61	265	338	3.02	B	1325
	2.0+3.5+7.1	1.27	2.22	4.51	---	3.04	8.00	9.06	0.65	252	339	3.17	B	1260
	2.0+5.0+5.0	1.34	3.33	3.33	---	2.96	8.00	9.39	0.62	238	333	3.36	A	1190
	2.0+5.0+6.0	1.23	3.08	3.69	---	3.09	8.00	9.54	0.65	232	341	3.45	A	1160
	2.0+5.0+7.1	1.13	2.84	4.03	---	3.25	8.00	9.60	0.65	226	348	3.54	A	1130
	2.0+6.0+6.0	1.14	3.43	3.43	---	3.23	8.00	9.60	0.65	232	349	3.45	A	1160
	2.0+2.5+2.5	2.40	2.40	2.40	---	2.34	7.20	7.61	0.51	247	2.77	2.91	C	1235
4MXS80E7V3B	2.5+2.5+3.5	2.18	2.18	3.06	---	2.48	7.42	8.01	0.54	265	3.02	2.80	D	1325
	2.5+2.5+5.0	1.94	1.94	3.89	---	2.68	7.77	8.80	0.58	252	324	3.08	B	1260
	2.5+2.5+6.0	1.82	1.82	4.36	---	2.82	8.00	8.83	0.61	265	325	3.02	B	1325
	2.5+2.5+7.1	1.65	1.65	4.70	---	2.97	8.00	9.03	0.61	258	339	3.10	B	1290
	2.5+3.5+3.5	2.01	2.82	2.82	---	2.61	7.65	8.34	0.57	277	3.08	2.76	D	1385
	2.5+3.5+5.0	1.81	2.55	3.64	---	2.82	8.00	8.80	0.61	271	324	2.95	C	1355
	2.5+3.5+6.0	1.67	2.33	4.00	---	2.96	8.00	9.01	0.61	265	338	3.02	B	1325
	2.5+3.5+7.1	1.52	2.14	4.34	---	3.11	8.00	9.06	0.65	258	339	3.10	B	1290
	2.5+5.0+5.0	1.60	3.20	3.20	---	3.03	8.00	9.47	0.62	238	340	3.36	A	1190
	2.5+5.0+6.0	1.48	2.96	3.56	---	3.16	8.00	9.58	0.65	232	348	3.45	A	1160
	2.5+6.0+6.0	1.38	3.31	3.31	---	3.30	8.00	9.60	0.68	226	349	3.54	A	1130
	3.5+3.5+3.5	2.63	2.63	2.63	---	2.75	7.89	8.53	0.61	296	323	2.67	D	1480
	3.5+3.5+5.0	2.33	2.33	3.34	---	2.96	8.00	8.97	0.61	271	338	2.95	C	1355
	3.5+3.5+6.0	2.15	2.15	3.70	---	3.09	8.00	9.05	0.65	265	338	3.02	B	1325
	3.5+3.5+7.1	1.99	1.99	4.02	---	3.25	8.00	9.03	0.68	258	339	3.10	B	1290
	3.5+5.0+5.0	2.08	2.96	2.96	---	3.16	8.00	9.58	0.65	238	348	3.36	A	1190
	3.5+5.0+6.0	1.93	2.76	3.31	---	3.30	8.00	9.60	0.68	232	348	3.45	A	1160
	2.0+2.0+2.0+2.0	1.83	1.83	1.83	1.83	2.41	7.32	7.90	0.52	228	2.64	3.21	A	1140
	2.0+2.0+2.0+2.5	1.75	1.75	2.17	2.48	7.42	8.16	0.55	217	2.64	3.42	A	1085	
	2.0+2.0+2.0+3.5	1.61	1.61	1.61	2.82	2.61	7.65	8.62	0.55	234	2.96	3.27	A	1170
	2.0+2.0+2.0+5.0	1.45	1.45	1.45	3.65	2.82	8.00	9.15	0.59	225	2.97	3.56	A	1125
	2.0+2.0+2.0+6.0	1.33	1.33	1.33	4.01	2.96	8.00	9.39	0.62	238	333	3.36	A	1190
	2.0+2.0+2.0+7.1	1.22	1.22	1.22	4.34	3.11	8.00	9.55	0.65	232	341	3.45	A	1160
	2.0+2.0+2.5+2.5	1.68	1.68	2.09	2.09	2.55	7.54	8.40	0.55	228	2.96	3.31	A	1140
	2.0+2.0+2.5+3.5	1.55	1.55	1.94	2.73	2.68	7.77	8.82	0.58	240	3.10	3.24	A	1200
	2.0+2.0+2.5+5.0	1.39	1.39	1.74	3.48	2.89	8.00	9.28	0.59	238	325	3.36	A	1190
	2.0+2.0+2.5+6.0	1.28	1.28	1.60	3.84	3.03	8.00	9.47	0.62	238	340	3.36	A	1190
	2.0+2.0+2.5+7.1	1.18	1.18	1.47	4.17	3.18	8.00	9.59	0.65	232	348	3.45	A	1160
	2.0+2.0+3.5+3.5	1.45	1.45	2.55	2.55	2.82	8.00	8.79	0.61	258	324	3.10	B	1290
	2.0+2.0+3.5+5.0	1.28	1.28	2.24	3.20	3.03	8.00	9.47	0.62	238	340	3.36	A	1190
	2.0+2.0+3.5+6.0	1.19	1.19	2.07	3.55	3.16	8.00	9.58	0.65	238	348	3.36	A	1190
	2.0+2.0+5.0+5.0	1.14	1.14	2.86	2.86	3.23	8.00	9.60	0.65	214	3.11	3.74	A	1070
4MXS80E7V3B	2.0+2.5+2.5+2.5	1.62	2.01	2.01	2.61	7.65	8.62	0.55	246	3.17	3.11	B	1230	
	2.0+2.5+2.5+3.5	1.50	1.88	1.88	2.62	2.75	7.88	8.99	0.58	246	3.24	3.20	A	1230
	2.0+2.5+2.5+5.0	1.33	1.67	1.67	3.33	2.96	8.00	9.39	0.62	238	333	3.36	A	1190
	2.0+2.5+2.5+6.0	1.23	1.54	1.54	3.69	3.09	8.00	9.54	0.65	235	348	3.40	A	1175
	2.0+2.5+2.5+7.1	1.13	1.42	1.42	4.03	3.25	8.00	9.60	0.65	238	348	3.36	A	1190
	2.0+2.5+3.5+3.5	1.40	1.74	2.43	2.43	2.89	8.00	9.02	0.61	270	338	2.96	C	1350
	2.0+2.5+3.5+5.0	1.23	1.54	2.15	3.08	3.09	8.00	9.54	0.65	238	347	3.36	A	1190
	2.0+2.5+3.5+6.0	1.14	1.43	2.00	3.43	3.23	8.00	9.60	0.65	238	348	3.36	A	1190
	2.0+2.5+5.0+5.0	1.10	1.38	2.76	2.76	3.30	8.00	9.60	0.65	210	3.11	3.81	A	1050
	2.0+3.5+3.5+3.5	1.28	2.24	2.24	3.03	8.00	9.16	0.65	270	338	2.96	C	1350	
	2.0+3.5+3.5+5.0	1.14	2.00	2.00	2.86	3.23	8.00	9.59	0.65	238	348	3.36	A	1190
	2.5+2.5+2.5+2.5	1.94	1.94	1.94	2.68	2.76	7.76	8.79	0.58	252	324	3.08	B	1260
	2.5+2.5+2.5+3.5	1.82	1.82	2.54	2.82	8.00	8.85	0.61	270	324	2.96	C	1350	
	2.5+2.5+2.5+5.0	1.60	1.60	1.60	3.20	3.03	8.00	9.47	0.62	238	340	3.36	A	1190
	2.5+2.5+2.5+6.0	1.48	1.48	1.48	3.56	3.16	8.00	9.58	0.65	232	348	3.45	A	1160
	2.5+2.5+3.5+3.5	1.67	1.67	2.33	2.96	8.00	8.97	0.61	270	338	2.96	C	1350	
	2.5+2.5+3.5+5.0	1.48	1.48	2.07	2.97	3.16	8.00	9.58	0.65	238	347	3.36	A	1190
	2.5+2.5+3.5+6.0	1.38	1.38</											

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)				TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			COP	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX		
4MXS80E7V3B	2.0	244	---	---	---	131	244	410	0.33	0.72	130	339	C
	2.5	305	---	---	---	136	305	455	0.35	0.94	142	324	C
	3.5	427	---	---	---	148	427	494	0.38	1.52	179	281	D
	5.0	609	---	---	---	190	609	692	0.44	1.83	223	333	C
	6.0	731	---	---	---	219	731	792	0.58	2.32	263	315	D
	7.1	865	---	---	---	250	865	870	0.62	2.94	297	294	D
	20+20	244	244	---	---	1.62	4.88	655	0.36	1.26	1.87	387	A
	20+25	244	305	---	---	1.76	5.49	685	0.40	1.44	1.95	381	A
	20+35	244	426	---	---	2.05	6.70	735	0.46	1.99	2.28	337	C
	20+50	244	609	---	---	2.47	8.53	851	0.57	2.41	241	354	B
	20+60	232	695	---	---	2.74	9.27	933	0.61	2.60	265	357	B
	20+7.1	211	749	---	---	3.04	9.60	999	0.65	2.64	285	364	A
	25+25	304	3.04	---	---	1.90	6.08	6.91	0.44	1.81	2.19	336	C
	25+35	305	426	---	---	2.19	7.31	822	0.59	2.28	269	321	C
	25+50	298	5.95	---	---	2.61	8.93	9.12	0.59	2.56	267	349	B
	25+60	282	6.78	---	---	2.88	9.60	974	0.63	2.88	295	333	C
	25+7.1	250	7.10	---	---	3.17	9.60	9.99	0.67	2.68	289	358	B
	35+35	426	426	---	---	2.47	8.52	884	0.63	2.95	3.07	289	D
	35+50	395	5.65	---	---	2.88	9.60	9.72	0.63	2.82	288	340	B
	35+60	354	6.06	---	---	3.15	9.60	997	0.68	2.70	286	356	B
	35+7.1	317	6.43	---	---	3.45	9.60	10.00	0.72	2.59	279	371	A
	50+50	480	4.80	---	---	3.28	9.60	1027	0.63	2.44	276	393	A
	50+6.0	436	524	---	---	3.55	9.60	1031	0.67	2.43	274	395	A
	50+7.1	397	5.63	---	---	3.85	9.60	1034	0.71	2.42	273	397	A
	60+6.0	480	4.80	---	---	3.82	9.60	1035	0.71	2.46	278	390	A
	60+7.1	440	5.20	---	---	4.12	9.60	1038	0.76	2.45	277	392	A
4MXS80E7V3B	7.1-7.1	480	480	---	---	4.42	9.60	1041	0.83	2.39	270	402	A
	20+2.0+2.0	243	243	243	---	2.19	7.29	8.02	0.52	1.90	216	384	A
	20+2.0+2.5	244	244	3.04	---	2.33	7.92	859	0.55	2.11	240	375	A
	20+2.0+3.5	238	238	4.17	---	2.61	8.93	930	0.59	2.52	267	354	B
	20+2.0+5.0	213	213	5.34	---	3.01	9.60	1025	0.59	2.45	276	392	A
	20+2.0+6.0	192	1.92	5.76	---	3.28	9.60	1029	0.62	2.43	275	395	A
	20+2.0+7.1	173	1.73	6.14	---	3.58	9.60	1032	0.67	2.42	274	397	A
	20+2.5+2.5	243	3.05	3.05	---	2.47	8.53	859	0.57	2.32	237	368	A
	20+2.5+3.5	231	290	4.06	---	2.74	9.27	930	0.61	2.59	264	358	B
	20+2.5+5.0	202	253	5.05	---	3.15	9.60	1025	0.61	2.45	276	392	A
	20+2.5+6.0	182	2.29	5.49	---	3.42	9.60	1029	0.65	2.43	275	395	A
	20+2.5+7.1	165	2.07	5.88	---	3.72	9.60	1032	0.69	2.42	274	397	A
	20+3.5+3.5	214	3.73	3.73	---	3.01	9.60	992	0.66	2.67	282	360	B
	20+3.5+5.0	183	3.20	4.57	---	3.42	9.60	1026	0.65	2.44	276	393	A
	20+3.5+6.0	167	2.92	5.01	---	3.69	9.60	1030	0.69	2.43	274	395	A
	20+3.5+7.1	152	2.67	5.41	---	3.99	9.60	1033	0.74	2.42	273	397	A
	20+5.0+5.0	160	4.00	4.00	---	3.82	9.60	1060	0.64	2.27	268	423	A
	20+5.0+6.0	148	3.69	4.43	---	4.09	9.60	1064	0.71	2.26	267	425	A
	20+5.0+7.1	137	3.40	4.83	---	4.39	9.60	1068	0.75	2.25	266	427	A
	20+6.0+6.0	138	4.11	4.11	---	4.36	9.60	1068	0.75	2.25	265	427	A
	25+2.5+2.5	297	297	---	---	2.61	8.91	948	0.59	2.51	278	355	B
	25+2.5+3.5	282	282	3.96	---	2.88	9.60	971	0.64	2.77	283	347	B
	25+2.5+5.0	240	240	4.80	---	3.28	9.60	1025	0.63	2.45	276	392	A
	25+2.5+6.0	218	218	5.24	---	3.55	9.60	1029	0.67	2.43	275	395	A
	25+2.5+7.1	198	1.98	5.64	---	3.85	9.60	1032	0.72	2.42	274	397	A
	25+3.5+3.5	252	3.54	3.54	---	3.15	9.60	992	0.68	2.67	282	360	B
	25+3.5+5.0	219	3.05	4.36	---	3.55	9.60	1026	0.68	2.44	276	393	A
	25+3.5+6.0	200	2.80	4.80	---	3.82	9.60	1030	0.72	2.43	274	395	A
	25+3.5+7.1	184	2.56	5.20	---	4.12	9.60	1033	0.76	2.42	273	397	A
	25+5.0+5.0	192	3.84	3.84	---	3.96	9.60	1060	0.69	2.27	268	423	A
	25+5.0+6.0	177	3.56	4.27	---	4.23	9.60	1064	0.73	2.26	267	425	A
	25+6.0+6.0	166	3.97	3.97	---	4.50	9.60	1068	0.78	2.25	265	427	A
4MXS80E7V3B	35+3.5+3.5	320	320	320	---	3.42	9.60	993	0.73	2.66	282	361	A
	35+3.5+5.0	280	280	4.00	---	3.82	9.60	1027	0.72	2.44	275	393	A
	35+3.5+6.0	258	258	4.44	---	4.09	9.60	1031	0.77	2.43	274	395	A
	35+3.5+7.1	238	238	4.84	---	4.39	9.60	1034	0.82	2.41	273	398	A
	35+5.0+5.0	248	356	356	---	4.23	9.60	1062	0.74	2.27	268	423	A
	35+5.0+6.0	232	331	3.97	---	4.50	9.60	1065	0.78	2.26	266	425	A
	20+2.0+20+2.0	232	232	2.32	2.32	2.74	9.28	936	0.54	2.50	255	371	A
	20+2.0+20+2.5	226	226	2.26	2.82	2.88	9.60	9.60	0.57	2.60	260	369	A
	20+2.0+20+3.5	202	2.02	2.02	3.54	3.15	9.60	1025	0.61	2.45	276	392	A
	20+2.0+20+5.0	175	1.75	1.75	4.35	3.55	9.60	1059	0.60	2.28	269	421	A
	20+2.0+20+6.0	160	1.60	1.60	4.80	3.82	9.60	1063	0.64	2.27	267	423	A
	20+2.0+20+7.1	147	1.47	1.47	5.19	4.12	9.60	1066	0.70	2.25	266	427	A
	20+2.0+25+2.5	213	2.13	2.67	2.67	3.01	9.60	1024	0.59	2.45	277	392	A
	20+2.0+25+3.5	192	1.92	2.40	3.36	3.28	9.60	1025	0.63	2.45	276	392	A
	20+2.0+25+5.0	167	1.67	2.09	4.17	3.69	9.60	1059	0.62	2.28	269	421	A
	20+2.0+25+6.0	154	1.54	1.92	4.60	3.96	9.60	1063	0.69	2.27	267	423	A
	20+2.0+25+7.1	141	1.41	1.76	5.02	4.26	9.60	1066	0.73	2.25	266	427	A
	20+2.0+35+3.5	175	1.75	3.05	3.05	3.55	9.60	1026	0.68	2.44	276	393	A
	20+2.0+35+5.0	154	1.54	2.69	3.83	3.96	9.60	1060	0.69	2.28	269	421	A
	20+2.0+35+6.0	142	1.42	2.49	4.27	4.23	9.60	1064	0.73	2.26	267	425	A
	20+2.0+50+5.0	137	1.37	3.43	3.43	4.36	9.60	1094	0.70	2.11	261	455	A
	20+2.5+25+2.5	201	253	253	3.15	9.60	1024	0.61	2.45	277	392	A	
	20+2.5+25+3.5	182	229	2.29	3.20	3.42	9.60	1025	0.66	2.45	276	392	A
	20+2.5+25+5.0	160	2.00	4.00	3.82	9.60	1059	0.67	2.28	269	421	A	
	20+2.5+25+6.0	147	1.85	1.85	4.43	4.09	9.60	1063	0.71	2.27	267	423	A
	20+2.5+25+7.1	137	1.70	1.70	4.83	4.39	9.60	1066	0.75	2.25	266	427	A
	20+2.5+35+3.5	167	2.09	2.92	2.92	3.69	9.60	1026	0.70	2.44	276	393	A
	20+2.5+35+5.0	148	1.85	2.58	3.69	4.09	9.6						

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)				TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			COP	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX		
<b>4MXS80E7V3B</b>	20+25+50+50	132	166	331	331	450	9.60	1094	0.72	211	261	4.55	A
	20+35+35+35	153	269	269	269	396	9.60	1027	0.75	244	276	3.93	A
	20+35+35+50	137	240	240	343	436	9.60	1061	0.76	227	268	4.23	A
	25+25+25+25	240	240	240	240	328	9.60	1024	0.63	245	277	3.92	A
	25+25+25+35	218	218	218	306	355	9.60	1025	0.68	245	276	3.92	A
	25+25+25+50	192	192	192	384	396	9.60	1059	0.69	228	269	4.21	A
	25+25+25+60	178	178	178	426	423	9.60	1063	0.73	227	267	4.23	A
	25+25+35+35	200	200	280	280	382	9.60	1026	0.73	244	276	3.93	A
	25+25+35+50	178	178	249	355	423	9.60	1060	0.74	228	269	4.21	A
	25+25+35+60	166	166	232	396	450	9.60	1064	0.78	226	267	4.25	A
	25+35+35+35	186	258	258	258	4.09	9.60	1027	0.78	244	276	3.93	A
	25+35+35+50	165	232	232	331	450	9.60	1061	0.79	227	268	4.23	A
	35+35+35+35	240	240	240	240	436	9.60	1028	0.83	244	275	3.93	A

Note: Connected to 2.0, 2.5, 3.5 class : wall mounted C type / 5.0, 6.0, 7.1 class : wall mounted E type

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)				TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX			
<b>4MXS80E7V3B</b>	2.0	2.00	---	---	---	1.80	2.00	2.99	0.45	0.61	1.10	3.28	A	305
	2.5	2.50	---	---	---	1.87	2.50	3.52	0.49	0.78	1.33	3.21	A	390
	3.5	3.50	---	---	---	1.91	3.50	4.80	0.49	1.19	1.82	2.94	C	595
	5.0	5.00	---	---	---	2.07	5.00	5.82	0.49	1.82	2.08	2.75	D	910
	6.0	6.00	---	---	---	2.17	6.00	6.60	0.50	1.98	2.38	3.03	B	990
	7.1	7.10	---	---	---	2.28	7.10	7.37	0.50	2.69	2.88	2.64	D	1345
	20+2.0	2.00	2.00	---	---	1.97	4.00	5.30	0.50	1.23	1.67	3.25	A	615
	20+2.5	2.00	250	---	---	2.02	450	5.73	0.50	1.38	1.77	3.26	A	690
	20+3.5	2.00	350	---	---	2.12	550	6.31	0.50	1.77	2.44	3.11	B	885
	20+5.0	2.00	500	---	---	2.27	7.00	7.30	0.51	2.51	2.76	2.79	D	1255
	20+6.0	1.83	548	---	---	2.41	7.31	7.90	0.55	2.48	2.87	2.95	C	1240
	20+7.1	1.66	590	---	---	2.56	7.56	8.45	0.59	2.67	3.29	2.83	C	1335
	25+2.5	250	250	---	---	2.07	5.00	6.12	0.46	1.47	2.44	3.40	A	735
	25+3.5	250	350	---	---	2.17	6.00	6.60	0.50	1.99	2.38	3.02	B	995
	25+5.0	240	479	---	---	2.34	7.19	7.59	0.54	2.64	2.96	2.72	D	1320
	25+6.0	218	524	---	---	2.48	7.42	8.16	0.59	2.60	3.07	2.85	C	1300
	25+7.1	200	568	---	---	2.63	7.68	8.66	0.59	2.74	3.43	2.80	C	1370
	35+3.5	350	350	---	---	2.27	7.00	7.30	0.50	2.63	2.88	2.66	D	1315
	35+5.0	3.06	436	---	---	2.48	7.42	8.16	0.58	2.83	3.37	2.62	D	1415
	35+6.0	2.82	483	---	---	2.61	7.65	8.62	0.59	2.74	4.11	2.79	D	1370
	35+7.1	2.61	530	---	---	2.77	7.91	8.31	0.63	2.87	3.15	2.76	D	1435
	50+5.0	3.88	388	---	---	2.68	7.76	8.66	0.62	2.98	3.62	2.60	D	1490
	50+6.0	3.64	436	---	---	2.82	8.00	9.14	0.67	2.88	3.69	2.78	D	1440
	50+7.1	3.31	469	---	---	2.97	8.00	9.35	0.67	2.82	3.85	2.84	C	1410
	60+6.0	4.00	400	---	---	2.96	8.00	9.39	0.67	2.65	3.60	3.02	B	1325
	60+7.1	3.66	434	---	---	3.11	8.00	9.55	0.71	2.58	3.76	3.10	B	1290
<b>4MXS80E7V3B</b>	7.1+7.1	4.00	400	---	---	3.26	8.00	9.60	0.75	2.51	3.77	3.19	B	1255
	20+2.0+2.0	2.00	200	200	---	2.17	6.00	6.63	0.52	1.73	2.11	3.47	A	865
	20+2.0+2.5	2.00	200	250	---	2.22	650	6.95	0.52	2.00	2.29	3.25	A	1000
	20+2.0+3.5	1.92	192	335	---	2.34	7.19	7.61	0.55	2.42	2.67	2.97	C	1210
	20+2.0+5.0	1.68	168	418	---	2.55	7.54	8.40	0.59	2.55	3.17	2.96	C	1275
	20+2.0+6.0	1.55	155	467	---	2.68	7.77	8.82	0.60	2.45	3.14	3.17	B	1225
	20+2.0+7.1	1.44	144	512	---	2.83	8.00	9.18	0.64	2.58	3.45	3.10	B	1290
	20+2.5+2.5	2.00	250	250	---	2.27	7.00	7.30	0.52	2.29	2.48	3.06	B	1145
	20+2.5+3.5	1.83	228	320	---	2.41	7.31	7.90	0.55	2.48	2.87	2.95	C	1240
	20+2.5+5.0	1.61	201	403	---	2.61	7.65	8.62	0.59	2.62	3.31	2.92	C	1310
	20+2.5+6.0	1.50	188	450	---	2.75	7.88	8.99	0.64	2.51	3.29	3.14	B	1255
	20+2.5+7.1	1.38	172	490	---	2.90	8.00	9.30	0.67	2.58	3.53	3.10	B	1290
	20+3.5+3.5	1.68	293	293	---	2.55	7.54	8.40	0.59	2.67	3.22	2.82	C	1335
	20+3.5+5.0	1.50	263	375	---	2.75	7.88	8.99	0.63	2.75	3.61	2.87	C	1375
	20+3.5+6.0	1.39	243	418	---	2.89	8.00	9.28	0.67	2.58	3.52	3.10	B	1290
	20+3.5+7.1	1.27	222	451	---	3.04	8.00	9.10	0.67	2.51	3.30	3.19	B	1255
	20+5.0+5.0	1.34	333	333	---	2.96	8.00	9.39	0.67	2.76	3.80	2.90	C	1380
	20+5.0+6.0	1.23	308	369	---	3.09	8.00	9.54	0.71	2.46	3.63	3.25	A	1230
	20+5.0+7.1	1.13	284	403	---	3.25	8.00	9.60	0.71	2.39	3.63	3.35	A	1195
	20+6.0+6.0	1.14	343	343	---	3.23	8.00	9.60	0.72	2.28	3.37	3.51	A	1140
	25+2.5+2.5	2.40	240	240	---	2.34	7.20	7.61	0.55	2.42	2.67	2.98	C	1210
	25+2.5+3.5	2.18	218	306	---	2.48	7.42	8.16	0.59	2.54	3.08	2.92	C	1270
	25+2.5+5.0	1.94	194	389	---	2.68	7.77	8.82	0.63	2.68	3.46	2.90	C	1340
	25+2.5+6.0	1.82	182	436	---	2.82	8.00	9.15	0.64	2.58	3.44	3.10	B	1290
	25+2.5+7.1	1.65	165	470	---	2.97	8.00	9.41	0.67	2.51	3.60	3.19	B	1255
	25+3.5+3.5	2.01	282	282	---	2.61	7.65	8.34	0.59	2.74	3.01	2.79	D	1370
	25+3.5+5.0	1.81	255	364	---	2.82	8.00	9.15	0.67	2.82	3.69	2.84	C	1410
	25+3.5+6.0	1.67	233	400	---	2.96	8.00	9.39	0.67	2.58	3.60	3.10	B	1290
	25+3.5+7.1	1.52	214	434	---	3.11	8.00	9.10	0.71	2.51	3.30	3.19	B	1255
	25+5.0+5.0	1.60	320	320	---	3.03	8.00	9.47	0.71	2.76	3.88	2.90	C	1380
	25+5.0+6.0	1.48	296	356	---	3.16	8.00	9.58	0.71	2.46	3.63	3.25	A	1230
	25+6.0+6.0	1.38	331	331	---	3.30	8.00	9.60	0.72	2.22	3.37	3.60	A	1110

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX			
4MXS80E7V3B	35+35+3.5	263	263	263	---	2.75	7.89	8.67	0.63	2.87	3.15	2.75	D	1435
	35+35+5.0	233	233	334	---	2.96	8.00	9.35	0.67	2.82	3.85	2.84	C	1410
	35+35+6.0	215	215	370	---	3.09	8.00	9.11	0.71	2.58	3.37	3.10	B	1290
	35+35+7.1	199	199	402	---	3.25	8.00	9.60	0.75	2.51	3.77	3.19	B	1255
	35+50+5.0	208	296	296	---	3.16	8.00	9.55	0.71	2.76	3.88	2.90	C	1380
	35+50+6.0	193	276	331	---	3.30	8.00	9.60	0.75	2.46	3.63	3.25	A	1230
	20+20+20+2.0	183	183	183	1.83	2.41	7.32	7.90	0.56	2.07	2.38	3.54	A	1035
	20+20+20+2.5	175	175	175	2.17	2.48	7.42	8.16	0.56	2.13	2.51	3.48	A	1065
	20+20+20+3.5	161	161	161	2.82	2.61	7.65	8.62	0.60	2.26	2.85	3.38	A	1130
	20+20+20+5.0	145	145	145	3.65	2.82	8.00	9.15	0.64	2.52	3.32	3.17	B	1260
	20+20+20+6.0	133	133	133	4.01	2.96	8.00	9.39	0.68	2.28	3.21	3.51	A	1140
	20+20+20+7.1	122	122	122	4.34	3.11	8.00	9.55	0.68	2.22	3.29	3.60	A	1110
	20+20+25+2.5	168	168	209	2.09	2.55	7.54	8.40	0.60	2.19	2.72	3.44	A	1095
	20+20+25+3.5	155	155	194	2.73	2.68	7.77	8.82	0.60	2.45	3.14	3.17	B	1225
	20+20+25+5.0	139	139	174	3.48	2.89	8.00	9.28	0.64	2.52	3.39	3.17	B	1260
	20+20+25+6.0	128	128	160	3.84	3.03	8.00	9.47	0.68	2.28	3.21	3.51	A	1140
	20+20+25+7.1	118	118	147	4.17	3.18	8.00	9.59	0.72	2.22	3.29	3.60	A	1110
	20+20+35+3.5	145	145	255	2.55	2.82	8.00	8.96	0.64	2.58	3.22	3.10	B	1290
	20+20+35+5.0	128	128	224	3.20	3.03	8.00	9.47	0.68	2.52	3.55	3.17	B	1260
	20+20+35+6.0	119	119	2.07	3.55	3.16	8.00	9.58	0.72	2.28	3.29	3.51	A	1140
	20+20+50+5.0	114	114	286	2.86	3.23	8.00	9.60	0.71	2.44	3.50	3.28	A	1220
	20+25+25+2.5	162	201	2.01	2.61	7.65	8.62	0.60	2.26	2.85	3.38	A	1130	
	20+25+25+3.5	150	188	1.88	2.62	2.75	7.88	8.99	0.64	2.51	3.29	3.14	B	1255
	20+25+25+5.0	133	167	1.67	3.33	2.96	8.00	9.39	0.68	2.52	3.47	3.17	B	1260
	20+25+25+6.0	123	154	1.54	3.69	3.09	8.00	9.54	0.68	2.25	3.29	3.56	A	1125
	20+25+25+7.1	113	142	1.42	4.03	3.25	8.00	9.60	0.72	2.28	3.29	3.51	A	1140
4MXS80E7V3B	20+25+35+3.5	140	174	243	2.43	2.89	8.00	9.14	0.67	2.58	3.37	3.10	B	1290
	20+25+35+5.0	123	154	215	3.08	3.09	8.00	9.54	0.71	2.52	3.55	3.17	B	1260
	20+25+35+6.0	114	143	200	3.43	3.23	8.00	9.60	0.72	2.28	3.29	3.51	A	1140
	20+25+50+5.0	110	138	276	2.76	3.30	8.00	9.60	0.71	2.40	3.50	3.33	A	1200
	20+35+35+3.5	128	224	224	3.03	8.00	9.23	0.67	2.58	3.30	3.10	B	1290	
	20+35+35+5.0	114	200	200	2.86	3.23	8.00	9.60	0.71	2.52	3.63	3.17	B	1260
	25+25+25+2.5	194	194	194	1.94	2.68	7.76	8.82	0.60	2.45	3.14	3.17	B	1225
	25+25+25+3.5	182	182	1.82	2.54	2.82	8.00	8.98	0.64	2.58	3.22	3.10	B	1290
	25+25+25+5.0	160	160	1.60	3.20	3.03	8.00	9.47	0.68	2.52	3.55	3.17	B	1260
	25+25+25+6.0	148	148	148	3.56	3.16	8.00	9.58	0.72	2.28	3.29	3.51	A	1140
	25+25+35+3.5	167	167	233	2.33	2.96	8.00	9.10	0.67	2.58	3.37	3.10	B	1290
	25+25+35+5.0	148	148	2.07	2.97	3.16	8.00	9.58	0.71	2.52	3.63	3.17	B	1260
	25+25+35+6.0	138	138	1.93	3.31	3.30	8.00	9.60	0.72	2.28	3.29	3.51	A	1140
	25+35+35+3.5	155	215	215	2.15	3.09	8.00	9.35	0.71	2.58	3.30	3.10	B	1290
	25+35+35+5.0	138	193	1.93	2.76	3.30	8.00	9.60	0.75	2.52	3.63	3.17	B	1260
	35+35+35+3.5	200	200	200	2.00	3.23	8.00	9.60	0.71	2.58	3.77	3.10	B	1290

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX		
4MXS80E7V3B	2.0	244	---	---	---	1.31	2.44	4.10	0.31	0.67	1.22	3.64	A
	2.5	305	---	---	---	1.36	3.05	4.55	0.33	0.88	1.31	3.47	B
	3.5	427	---	---	---	1.48	4.27	5.11	0.34	1.42	1.73	3.01	D
	5.0	609	---	---	---	1.90	6.09	7.12	0.44	1.78	2.25	3.42	B
	6.0	731	---	---	---	2.19	7.31	8.19	0.55	2.19	2.64	3.34	C
	7.1	865	---	---	---	2.50	8.65	9.00	0.59	2.77	2.97	3.12	D
	20+20	244	244	---	---	1.62	4.88	6.55	0.34	1.17	1.74	4.17	A
	20+25	244	305	---	---	1.76	5.49	6.85	0.37	1.34	1.82	4.10	A
	20+35	244	426	---	---	2.05	6.70	7.35	0.43	1.86	2.13	3.60	A
	20+50	244	609	---	---	2.47	8.53	8.72	0.55	2.32	2.42	3.68	A
	20+60	232	695	---	---	2.74	9.27	9.67	0.57	2.44	2.64	3.80	A
	20+7.1	211	749	---	---	3.04	9.60	10.36	0.61	2.48	2.89	3.87	A
	25+25	304	304	---	---	1.90	6.08	7.16	0.41	1.69	2.14	3.60	B
	25+35	305	426	---	---	2.19	7.31	8.53	0.55	2.13	2.67	3.43	B
	25+50	298	595	---	---	2.61	8.93	9.31	0.57	2.52	2.72	3.54	B
	25+60	282	678	---	---	2.88	9.60	10.10	0.59	2.65	2.94	3.62	A
	25+7.1	250	710	---	---	3.17	9.60	10.36	0.63	2.51	2.93	3.82	A
	35+35	426	426	---	---	2.47	8.52	9.18	0.59	2.70	3.04	3.16	D
	35+50	395	565	---	---	2.88	9.60	9.92	0.62	2.77	2.93	3.47	B
	35+60	354	606	---	---	3.15	9.60	10.34	0.61	2.49	2.90	3.86	A
	35+7.1	317	643	---	---	3.45	9.60	10.37	0.67	2.43	2.84	3.95	A
	50+50	480	480	---	---	3.28	9.60	10.24	0.67	2.52	2.83	3.81	A
	50+60	436	524	---	---	3.55	9.60	10.47	0.66	2.40	2.80	4.00	A
	50+7.1	397	563	---	---	3.85	9.60	10.50	0.70	2.38	2.79	4.03	A
	60+60	480	480	---	---	3.82	9.60	10.70	0.67	2.32	2.77	4.14	A
	60+7.1	440	520	---	---	4.12	9.60	10.73	0.71	2.31	2.76	4.16	A
	7.1+7.1	480	480	---	---	4.42	9.60	10.77	0.78	2.25	2.70	4.27	A
4MXS80E7V3B	20+20+2.0	243	243	243	---	2.19	7.29	8.33	0.48	1.76	2.14	4.14	A
	20+20+2.5	244	244	304	---	2.33	7.92	8.93	0.50	1.96	2.32	4.04	A
	20+20+3.5	238	238	417	---	2.61	8.93	9.68	0.54	2.29	2.63	3.90	A
	20+20+5.0	213	213	534	---	3.01	9.60	10.48	0.57	2.39	2.80	4.02	A
	20+20+6.0	192	192	576	---	3.28	9.60	10.71	0.58	2.27	2.72	4.23	A
	20+20+7.1	173	173	614	---	3.58	9.60</td						

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT HEATING (kW)			COP	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	MIN	NOM	MAX	MIN	NOM	MAX		
4MXS80E7V3B	2.0+3.5+3.5	2.14	3.73	3.73	---	3.01	9.60	10.35	0.59	2.43	2.84	3.95	A
	2.0+3.5+5.0	1.83	3.20	4.57	---	3.42	9.60	10.49	0.63	2.39	2.80	4.02	A
	2.0+3.5+6.0	1.67	2.92	5.01	---	3.69	9.60	10.72	0.64	2.27	2.72	4.23	A
	2.0+3.5+7.1	1.52	2.67	5.41	---	3.99	9.60	10.75	0.69	2.26	2.70	4.25	A
	2.0+5.0+5.0	1.60	4.00	4.00	---	3.82	9.60	10.62	0.68	2.30	2.75	4.17	A
	2.0+5.0+6.0	1.48	3.69	4.43	---	4.09	9.60	10.85	0.69	2.18	2.72	4.40	A
	2.0+5.0+7.1	1.37	3.40	4.83	---	4.39	9.60	10.88	0.74	2.17	2.71	4.42	A
	2.0+6.0+6.0	1.38	4.11	4.11	---	4.36	9.60	11.08	0.70	2.11	2.64	4.55	A
	2.5+2.5+2.5	2.97	2.97	2.97	---	2.61	8.91	9.88	0.54	2.34	2.74	3.81	A
	2.5+2.5+3.5	2.82	2.82	3.96	---	2.88	9.60	10.12	0.59	2.53	2.79	3.79	A
	2.5+2.5+5.0	2.40	2.40	4.80	---	3.28	9.60	10.48	0.61	2.39	2.80	4.02	A
	2.5+2.5+6.0	2.18	2.18	5.24	---	3.55	9.60	10.71	0.62	2.27	2.72	4.23	A
	2.5+2.5+7.1	1.98	1.98	5.64	---	3.85	9.60	10.74	0.66	2.26	2.71	4.25	A
	2.5+3.5+3.5	2.52	3.54	3.54	---	3.15	9.60	10.35	0.61	2.43	2.84	3.95	A
	2.5+3.5+5.0	2.19	3.05	4.36	---	3.55	9.60	10.49	0.66	2.39	2.80	4.02	A
	2.5+3.5+6.0	2.00	2.80	4.80	---	3.82	9.60	10.72	0.67	2.27	2.72	4.23	A
	2.5+3.5+7.1	1.84	2.56	5.20	---	4.12	9.60	10.75	0.71	2.26	2.70	4.25	A
	2.5+5.0+5.0	1.92	3.84	3.84	---	3.96	9.60	10.62	0.71	2.30	2.75	4.17	A
	2.5+5.0+6.0	1.77	3.56	4.27	---	4.23	9.60	10.85	0.72	2.18	2.72	4.40	A
	2.5+6.0+6.0	1.66	3.97	3.97	---	4.50	9.60	11.08	0.72	2.11	2.64	4.55	A
	3.5+3.5+3.5	3.20	3.20	3.20	---	3.42	9.60	10.36	0.65	2.43	2.84	3.95	A
	3.5+3.5+5.0	2.80	2.80	4.00	---	3.82	9.60	10.49	0.70	2.39	2.79	4.02	A
	3.5+3.5+6.0	2.58	2.58	4.44	---	4.09	9.60	10.72	0.71	2.27	2.71	4.23	A
	3.5+3.5+7.1	2.38	2.38	4.84	---	4.39	9.60	10.76	0.76	2.26	2.70	4.25	A
	3.5+5.0+5.0	2.48	3.56	3.56	---	4.23	9.60	10.63	0.76	2.30	2.75	4.17	A
	3.5+5.0+6.0	2.32	3.31	3.97	---	4.50	9.60	10.86	0.77	2.18	2.72	4.40	A
4MXS80E7V3B	2.0+2.0+2.0+2.0	2.32	2.32	2.32	2.74	9.28	9.78	0.48	2.27	2.51	4.09	A	
	2.0+2.0+2.0+2.5	2.26	2.26	2.82	2.88	9.60	9.92	0.52	2.36	2.51	4.07	A	
	2.0+2.0+2.0+3.5	2.02	2.02	3.54	3.15	9.60	10.72	0.56	2.27	2.71	4.23	A	
	2.0+2.0+2.0+5.0	1.75	1.75	4.35	3.55	9.60	10.86	0.60	2.18	2.72	4.40	A	
	2.0+2.0+2.0+6.0	1.60	1.60	4.80	3.82	9.60	11.09	0.59	2.10	2.64	4.57	A	
	2.0+2.0+2.0+7.1	1.47	1.47	5.19	4.12	9.60	11.12	0.65	2.09	2.63	4.59	A	
	2.0+2.0+2.5+2.5	2.13	2.13	2.67	3.01	9.60	10.71	0.54	2.27	2.72	4.23	A	
	2.0+2.0+2.5+3.5	1.92	1.92	2.40	3.36	9.60	10.72	0.58	2.27	2.71	4.23	A	
	2.0+2.0+2.5+5.0	1.67	1.67	2.09	4.17	9.60	10.86	0.62	2.18	2.72	4.40	A	
	2.0+2.0+2.5+6.0	1.54	1.54	1.92	3.60	9.60	11.09	0.61	2.10	2.64	4.57	A	
	2.0+2.0+2.5+7.1	1.41	1.41	1.76	5.02	4.26	9.60	11.12	0.67	2.09	2.63	4.59	A
	2.0+2.0+3.5+3.5	1.75	1.75	3.05	3.55	9.60	10.73	0.62	2.26	2.71	4.25	A	
	2.0+2.0+3.5+5.0	1.54	1.54	2.69	3.83	9.60	10.86	0.67	2.18	2.71	4.40	A	
	2.0+2.0+3.5+6.0	1.42	1.42	2.49	4.27	9.60	11.09	0.67	2.10	2.63	4.57	A	
	2.0+2.0+5.0+5.0	1.37	1.37	3.43	3.43	9.60	11.00	0.72	2.13	2.67	4.51	A	
	2.0+2.5+2.5+2.5	2.01	2.53	2.53	3.15	9.60	10.71	0.56	2.27	2.72	4.23	A	
	2.0+2.5+2.5+3.5	1.82	2.29	2.29	3.20	9.60	10.72	0.60	2.27	2.71	4.23	A	
	2.0+2.5+2.5+5.0	1.60	2.00	4.00	3.82	9.60	10.86	0.65	2.18	2.72	4.40	A	
	2.0+2.5+2.5+6.0	1.47	1.85	1.85	4.09	9.60	11.09	0.65	2.10	2.64	4.57	A	
	2.0+2.5+2.5+7.1	1.37	1.70	1.70	4.83	9.60	11.12	0.69	2.09	2.63	4.59	A	
	2.0+2.5+3.5+3.5	1.67	2.09	2.92	3.69	9.60	10.73	0.64	2.26	2.71	4.25	A	
	2.0+2.5+3.5+5.0	1.48	1.85	2.58	3.69	9.60	10.86	0.69	2.18	2.71	4.40	A	
	2.0+2.5+3.5+6.0	1.38	1.71	2.40	4.11	9.60	11.09	0.70	2.10	2.63	4.57	A	
	2.0+2.5+5.0+5.0	1.32	1.66	3.31	3.31	9.60	11.00	0.74	2.13	2.67	4.51	A	
	2.0+3.5+3.5+3.5	1.55	2.69	2.69	3.96	9.60	10.74	0.69	2.26	2.71	4.25	A	
	2.0+3.5+3.5+5.0	1.37	2.40	2.40	3.43	9.60	10.87	0.74	2.17	2.71	4.42	A	
	2.5+2.5+2.5+2.5	2.40	2.40	2.40	3.28	9.60	10.71	0.58	2.27	2.72	4.23	A	
	2.5+2.5+2.5+3.5	2.18	2.18	2.18	3.06	9.60	10.72	0.62	2.27	2.71	4.23	A	
	2.5+2.5+2.5+5.0	1.92	1.92	3.84	3.96	9.60	10.86	0.67	2.18	2.72	4.40	A	
	2.5+2.5+2.5+6.0	1.78	1.78	4.26	4.23	9.60	11.09	0.68	2.10	2.64	4.57	A	
	2.5+2.5+3.5+3.5	2.00	2.00	2.80	3.82	9.60	10.73	0.67	2.26	2.71	4.25	A	
	2.5+2.5+3.5+5.0	1.78	1.78	2.49	3.55	9.60	10.86	0.71	2.18	2.71	4.40	A	
4MXS80E7V3B	2.5+2.5+3.5+6.0	1.66	1.66	2.32	3.96	4.50	9.60	11.09	0.72	2.10	2.63	4.57	A
	2.5+3.5+3.5+3.5	1.86	2.58	2.58	4.09	9.60	10.74	0.71	2.26	2.71	4.25	A	
	2.5+3.5+3.5+5.0	1.65	2.32	2.32	3.31	4.50	9.60	10.87	0.76	2.17	2.71	4.42	A
	3.5+3.5+3.5+3.5	2.40	2.40	2.40	4.20	4.36	9.60	10.75	0.76	2.26	2.70	4.25	A
	2.0+2.0+2.0+2.0	2.00	2.00	2.00	2.11	4.00	5.30	0.50	1.14	1.79	3.51	A	570
	2.0+2.0+2.0+2.5	2.00	2.50	2.00	2.16	4.50	5.73	0.50	1.30	1.79	3.46	A	650
	2.0+3.5+2.0+2.0	2.00	3.50	2.00	2.27	5.50	6.36	0.50	1.70	2.09	3.24	A	850
	2.0+5.0+2.0+2.0	2.00	5.00	2.00	2.44	7.00	7.31	0.50	2.23	2.39	3.14	B	1115
	2.0+6.0+2.0+2.0	1.86	5.56	2.00	2.58	7.42	7.96	0.54	2.45	2.81	3.03	B	1225
	2.0+7.1+2.0+2.0	1.71	6.09	2.00	2.74	7.80	8.47	0.57	2.69	3.13	2.90	C	1345

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)				TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)	
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
5MXS90E7V3B	2.0	2.00	---	---	---	---	1.88	2.00	3.03	0.45	0.56	1.02	3.57	A	280
	2.5	2.50	---	---	---	---	2.00	2.50	3.54	0.49	0.71	1.18	3.52	A	355
	3.5	3.50	---	---	---	---	2.05	3.50	4.82	0.52	1.14	1.47	3.07	B	570
	5.0	5.00	---	---	---	---	2.22	5.00	5.82	0.49	1.52	1.79	3.29	A	760
	6.0	6.00	---	---	---	---	2.33	6.00	6.60	0.50	1.89	2.24	3.17	B	945
	7.1	7.10	---	---	---	---	2.45	7.10	7.38	0.53	2.57	2.74	2.76	D	1285
	2.0+2.0</td														

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
SMXS90E7V3B	3.5+3.5	3.50	3.50	---	---	---	2.44	7.00	7.31	0.53	2.52	2.69	2.78	D	1260
	3.5+5.0	3.13	4.46	---	---	---	2.66	7.59	8.24	0.57	2.57	2.99	2.95	C	1285
	3.5+6.0	2.93	5.01	---	---	---	2.80	7.94	8.45	0.60	2.81	3.13	2.83	C	1405
	3.5+7.1	2.75	5.58	---	---	---	2.96	8.33	8.47	0.64	3.07	3.13	2.71	D	1535
	5.0+5.0	4.06	4.06	---	---	---	2.88	8.12	9.02	0.61	2.62	3.21	3.10	B	1310
	5.0+6.0	3.85	4.62	---	---	---	3.02	8.47	9.05	0.61	2.81	3.21	3.01	B	1405
	5.0+7.1	3.66	5.20	---	---	---	3.19	8.86	9.25	0.64	3.08	3.35	2.88	C	1540
	6.0+6.0	4.41	4.41	---	---	---	3.17	8.82	9.27	0.64	3.08	3.36	2.86	C	1540
	6.0+7.1	4.12	4.88	---	---	---	3.33	9.00	9.29	0.68	3.08	3.36	2.92	C	1540
	7.1+7.1	4.50	4.50	---	---	---	3.49	9.00	9.31	0.71	3.02	3.36	2.98	C	1510
	2.0+2.0+2.0	2.00	2.00	2.00	---	---	2.33	6.00	6.63	0.50	1.66	1.96	3.61	A	830
	2.0+2.0+2.5	2.00	2.00	2.50	---	---	2.38	6.50	6.97	0.50	1.91	2.17	3.40	A	955
	2.0+2.0+3.5	1.93	1.93	3.38	---	---	2.51	7.24	7.64	0.54	2.34	2.57	3.09	B	1170
	2.0+2.0+5.0	1.72	1.72	4.33	---	---	2.73	7.77	8.53	0.58	2.38	2.88	3.26	A	1190
	2.0+2.0+6.0	1.62	1.62	4.88	---	---	2.88	8.12	9.03	0.58	2.56	3.22	3.17	B	1280
	2.0+2.0+7.1	1.53	1.53	5.45	---	---	3.04	8.51	9.30	0.61	2.82	3.36	3.02	B	1410
	2.0+2.5+2.5	2.00	2.50	2.50	---	---	2.44	7.00	7.31	0.50	2.17	2.40	3.23	A	1085
	2.0+2.5+3.5	1.86	2.32	3.24	---	---	2.58	7.42	7.96	0.54	2.45	2.81	3.03	B	1225
	2.0+2.5+5.0	1.67	2.09	4.18	---	---	2.80	7.94	8.78	0.58	2.50	3.01	3.18	B	1250
	2.0+2.5+6.0	1.58	1.98	4.74	---	---	2.95	8.30	9.10	0.61	2.69	3.22	3.09	B	1345
	2.0+2.5+7.1	1.50	1.87	5.31	---	---	3.11	8.68	9.30	0.64	2.95	3.36	2.94	C	1475
	2.0+3.5+3.5	1.73	3.02	3.02	---	---	2.73	7.77	8.47	0.57	2.69	3.13	2.89	C	1345
	2.0+3.5+5.0	1.58	2.77	3.95	---	---	2.95	8.30	9.07	0.61	2.69	3.21	3.09	B	1345
	2.0+3.5+6.0	1.50	2.63	4.52	---	---	3.10	8.65	9.29	0.64	2.95	3.36	2.93	C	1475
	2.0+3.5+7.1	1.43	2.50	5.07	---	---	3.26	9.00	9.31	0.68	3.15	3.36	2.86	C	1575
	2.0+5.0+5.0	1.46	3.68	3.68	---	---	3.17	8.82	9.81	0.64	2.74	3.45	3.22	A	1370
SMXS90E7V3B	2.0+5.0+6.0	1.39	3.46	4.15	---	---	3.32	9.00	9.90	0.64	2.74	3.45	3.28	A	1370
	2.0+5.0+7.1	1.28	3.19	4.53	---	---	3.48	9.00	9.92	0.68	2.68	3.45	3.36	A	1340
	2.0+6.0+6.0	1.28	3.86	3.86	---	---	3.46	9.00	9.93	0.68	2.68	3.46	3.36	A	1340
	2.0+6.0+7.1	1.19	3.58	4.23	---	---	3.63	9.00	10.40	0.71	2.61	4.00	3.45	A	1305
	2.5+2.5+2.5	2.41	2.41	2.41	---	---	2.51	7.23	7.64	0.54	2.34	2.57	3.09	B	1170
	2.5+2.5+3.5	2.23	2.23	3.13	---	---	2.66	7.59	8.25	0.57	2.57	3.00	2.95	C	1285
	2.5+2.5+5.0	2.03	2.03	4.06	---	---	2.88	8.12	9.03	0.58	2.56	3.21	3.17	B	1280
	2.5+2.5+6.0	1.93	1.93	4.61	---	---	3.02	8.47	9.10	0.61	2.82	3.22	3.00	B	1410
	2.5+2.5+7.1	1.83	1.83	5.20	---	---	3.19	8.86	9.30	0.64	3.08	3.36	2.88	C	1540
	2.5+3.5+3.5	2.08	2.93	2.93	---	---	2.80	7.94	8.47	0.60	2.75	3.13	2.89	C	1375
	2.5+3.5+5.0	1.93	2.70	3.84	---	---	3.02	8.47	9.07	0.61	2.81	3.21	3.01	B	1405
	2.5+3.5+6.0	1.84	2.57	4.41	---	---	3.17	8.82	9.29	0.64	3.01	3.36	2.93	C	1505
	2.5+3.5+7.1	1.72	2.40	4.88	---	---	3.33	9.00	9.31	0.68	3.15	3.36	2.86	C	1575
	2.5+5.0+5.0	1.80	3.60	3.60	---	---	3.24	9.00	9.86	0.64	2.87	3.45	3.14	B	1435
	2.5+5.0+6.0	1.67	3.33	4.00	---	---	3.39	9.00	9.90	0.68	2.81	3.45	3.20	A	1405
	2.5+5.0+7.1	1.54	3.08	4.38	---	---	3.55	9.00	9.92	0.71	2.74	3.45	3.28	A	1370
	2.5+6.0+6.0	1.56	3.72	3.72	---	---	3.54	9.00	9.93	0.71	2.75	3.46	3.27	A	1375
	2.5+6.0+7.1	1.44	3.46	4.10	---	---	3.70	9.00	10.40	0.71	2.68	4.00	3.36	A	1340
	3.5+3.5+3.5	2.77	2.77	2.77	---	---	2.95	8.31	8.60	0.64	3.07	3.26	2.71	D	1535
	3.5+3.5+5.0	2.57	2.57	3.68	---	---	3.17	8.82	9.26	0.64	3.08	3.36	2.86	C	1540
	3.5+3.5+6.0	2.42	2.42	4.16	---	---	3.32	9.00	9.30	0.68	3.08	3.36	2.92	C	1540
	3.5+3.5+7.1	2.23	2.23	4.54	---	---	3.48	9.00	9.32	0.71	3.02	3.36	2.98	C	1510
	3.5+5.0+5.0	2.34	3.33	3.33	---	---	3.39	9.00	9.87	0.68	2.87	3.45	3.14	B	1435
	3.5+5.0+6.0	2.18	3.10	3.72	---	---	3.54	9.00	9.90	0.71	2.81	3.45	3.20	A	1405
	3.5+5.0+7.1	2.02	2.88	4.10	---	---	3.70	9.00	10.37	0.71	2.74	4.00	3.28	A	1370
	3.5+6.0+6.0	2.04	3.48	3.48	---	---	3.69	9.00	10.38	0.71	2.75	4.00	3.27	A	1375
	5.0+5.0+5.0	3.00	3.00	3.00	---	---	3.61	9.00	10.45	0.68	2.52	3.54	3.57	A	1260
SMXS90E7V3B	2.0+2.0+2.0+2.0	1.86	1.86	1.86	1.86	---	2.58	7.44	7.96	0.54	2.04	2.32	3.65	A	1020
	2.0+2.0+2.0+2.5	1.79	1.79	1.79	2.22	---	2.66	7.59	8.25	0.54	2.09	2.50	3.63	A	1045
	2.0+2.0+2.0+3.5	1.67	1.67	1.67	2.93	---	2.80	7.94	8.78	0.58	2.32	2.82	3.42	A	1160
	2.0+2.0+2.0+5.0	1.54	1.54	1.54	3.85	---	3.02	8.47	9.45	0.61	2.48	3.16	3.42	A	1240
	2.0+2.0+2.0+6.0	1.47	1.47	1.47	4.41	---	3.17	8.82	9.81	0.65	2.68	3.38	3.29	A	1340
	2.0+2.0+2.0+7.1	1.37	1.37	1.37	4.89	---	3.33	9.00	9.96	0.65	2.82	3.46	3.19	B	1410
	2.0+2.0+2.5+2.5	1.73	1.73	2.16	2.16	---	2.73	7.78	8.53	0.58	2.21	2.69	3.52	A	1105
	2.0+2.0+2.5+3.5	1.62	1.62	2.03	2.85	---	2.88	8.12	9.03	0.58	2.56	3.22	3.17	B	1280
	2.0+2.0+2.5+5.0	1.50	1.50	1.88	3.77	---	3.10	8.65	9.64	0.61	2.61	3.30	3.31	A	1305
	2.0+2.0+2.5+6.0	1.44	1.44	1.80	4.32	---	3.24	9.00	9.94	0.65	2.81	3.46	3.20	A	1405
	2.0+2.0+2.5+7.1	1.32	1.32	1.65	4.71	---	3.41	9.00	9.96	0.68	2.82	3.46	3.19	B	1410
	2.0+2.0+3.5+3.5	1.54	1.54	2.70	2.70	---	3.02	8.48	9.13	0.61	2.82	3.22	3.01	B	1410
	2.0+2.0+3.5+5.0	1.44	1.44	2.52	3.60	---	3.24	9.00	9.91	0.64	2.81	3.45	3.20	A	1405
	2.0+2.0+3.5+6.0	1.33	1.33	2.34	4.00	---	3.39	9.00	9.95	0.68	2.75	3.46	3.27	A	1375
	2.0+2.0+3.5+7.1	1.23	1.23	2.16	4.38	---	3.55	9.00	9.97	0.71	2.68	3.46	3.36	A	1340
	2.0+2.0+5.0+5.0	1.29	1.29	3.21	3.21	---	3.46	9.00	10.31	0.65	2.52	3.39	3.57	A	1260
	2.0+2.0+5.0+6.0	1.20	1.20	3.00	3.60	---	3.61	9.00	10.45	0.68	2.53	3.47	3.56	A	1265
	2.0+2.5+2.5+2.5	1.67	2.09	2.09	2.09	---	2.80	7.94	8.78	0.58	2.32	2.82	3.42	A	1160
	2.0+2.5+2.5+3.5	1.57	1.98	1.98	2.77	---	2.95	8.30	9.12	0.61	2.69	3.22	3.09	B	1345
	2.0+2.5+2.5+5.0	1.46													

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
SMXS90E7V3B	25+25+25+35	1.93	1.93	1.93	2.68	---	3.02	8.47	9.12	0.61	2.82	3.22	3.00	B	1410
	25+25+25+50	1.80	1.80	1.80	3.60	---	3.24	9.00	9.91	0.64	2.81	3.45	3.20	A	1405
	25+25+25+60	1.67	1.67	1.67	3.99	---	3.39	9.00	9.94	0.68	2.75	3.46	3.27	A	1375
	25+25+25+71	1.54	1.54	1.54	4.38	---	3.55	9.00	9.96	0.71	2.68	3.46	3.36	A	1340
	25+25+35+35	1.84	1.84	2.57	2.57	---	3.17	8.82	9.31	0.64	3.02	3.36	2.92	C	1510
	25+25+35+50	1.67	1.67	2.33	3.33	---	3.39	9.00	9.91	0.68	2.81	3.45	3.20	A	1405
	25+25+35+65	1.55	1.55	2.18	3.72	---	3.54	9.00	9.95	0.71	2.75	3.46	3.27	A	1375
	25+25+35+71	1.44	1.44	2.02	4.10	---	3.70	9.00	10.42	0.71	2.68	4.01	3.36	A	1340
	25+25+50+50	1.50	1.50	3.00	3.00	---	3.61	9.00	10.45	0.68	2.52	3.55	3.57	A	1260
	25+35+35+35	1.74	2.42	2.42	2.42	---	3.32	9.00	9.34	0.68	3.15	3.36	2.86	C	1575
	25+35+35+50	1.56	2.17	2.17	3.10	---	3.54	9.00	9.92	0.71	2.81	3.46	3.20	A	1405
	25+35+35+60	1.46	2.03	2.03	3.48	---	3.69	9.00	10.40	0.71	2.75	4.01	3.27	A	1375
	35+35+35+35	2.25	2.25	2.25	2.25	---	3.46	9.00	9.32	0.71	3.15	3.36	2.86	C	1575
	35+35+35+50	2.03	2.03	2.03	2.91	---	3.69	9.00	10.38	0.71	2.81	4.00	3.20	A	1405
	20+20+20+20+20	1.63	1.63	1.63	1.63	1.63	2.88	8.15	9.03	0.58	2.30	2.81	3.54	A	1150
	20+20+20+20+25	1.58	1.58	1.58	1.58	1.98	2.95	8.30	9.25	0.58	2.36	2.95	3.52	A	1180
	20+20+20+20+35	1.50	1.50	1.50	1.50	2.65	3.10	8.65	9.64	0.61	2.55	3.24	3.39	A	1275
	20+20+20+20+50	1.38	1.38	1.38	1.38	3.48	3.32	9.00	10.09	0.65	2.53	3.24	3.56	A	1265
	20+20+20+20+60	1.29	1.29	1.29	1.29	3.84	3.46	9.00	10.31	0.65	2.50	3.40	3.60	A	1250
	20+20+20+20+71	1.19	1.19	1.19	1.19	4.24	3.63	9.00	10.46	0.68	2.47	3.48	3.64	A	1235
	20+20+20+25+25	1.54	1.54	1.54	1.92	1.92	3.02	8.46	9.45	0.61	2.49	3.09	3.40	A	1245
	20+20+20+25+35	1.47	1.47	1.47	1.84	2.57	3.17	8.82	9.81	0.61	2.68	3.39	3.29	A	1340
	20+20+20+25+50	1.33	1.33	1.33	1.67	3.34	3.39	9.00	10.21	0.65	2.53	3.32	3.56	A	1265
	20+20+20+25+60	1.24	1.24	1.24	1.55	3.73	3.54	9.00	10.38	0.68	2.50	3.40	3.60	A	1250
	20+20+20+25+71	1.15	1.15	1.15	1.44	4.11	3.70	9.00	10.50	0.71	2.47	3.48	3.64	A	1235
	20+20+20+35+35	1.54	1.54	1.54	1.92	1.92	3.02	8.46	9.45	0.61	2.49	3.09	3.40	A	1245
	20+20+20+35+50	1.24	1.24	1.24	2.17	3.11	3.54	9.00	10.38	0.68	2.50	3.40	3.60	A	1250
	20+20+20+35+60	1.16	1.16	1.16	2.03	3.49	3.69	9.00	10.49	0.71	2.46	3.48	3.66	A	1230
	20+20+25+25+25	1.51	1.51	1.88	1.88	1.88	3.10	8.66	9.64	0.61	2.55	3.24	3.40	A	1275
	20+20+25+25+35	1.44	1.44	1.80	1.80	2.52	3.24	9.00	9.96	0.65	2.82	3.46	3.19	B	1410
	20+20+25+25+50	1.29	1.29	1.61	1.61	3.20	3.46	9.00	10.31	0.65	2.53	3.40	3.56	A	1265
	20+20+25+25+60	1.20	1.20	1.50	1.50	3.60	3.61	9.00	10.45	0.68	2.46	3.48	3.66	A	1230
	20+20+25+35+35	1.33	1.33	1.68	2.33	2.33	3.39	9.00	9.97	0.68	2.82	3.46	3.19	B	1410
	20+20+25+35+50	1.20	1.20	1.50	2.10	3.00	3.61	9.00	10.45	0.68	2.46	3.48	3.66	A	1230
	20+20+35+35+35	1.23	1.23	2.18	2.18	2.18	3.54	9.00	9.98	0.68	2.82	3.46	3.19	B	1410
	20+25+25+25+25	1.46	1.84	1.84	1.84	1.84	3.17	8.82	9.81	0.61	2.68	3.39	3.29	A	1340
	20+25+25+25+35	1.39	1.73	1.73	1.73	2.42	3.32	9.00	9.96	0.65	2.82	3.46	3.19	B	1410
	20+25+25+25+50	1.25	1.55	1.55	1.55	3.10	3.54	9.00	10.38	0.68	2.53	3.47	3.56	A	1265
	20+25+25+25+60	1.17	1.45	1.45	1.45	3.48	3.69	9.00	10.49	0.71	2.46	3.48	3.66	A	1230
	20+25+25+35+35	1.28	1.61	1.61	2.25	2.25	3.46	9.00	9.97	0.68	2.82	3.46	3.19	B	1410
	20+25+25+35+50	1.17	1.45	1.45	2.03	2.90	3.69	9.00	10.49	0.71	2.46	3.56	3.66	A	1230
	20+25+35+35+35	1.20	1.50	2.10	2.10	2.10	3.61	9.00	10.42	0.71	2.82	4.01	3.19	B	1410
	25+25+25+25+25	1.80	1.80	1.80	1.80	1.80	3.24	9.00	9.95	0.65	2.81	3.46	3.20	A	1405
	25+25+25+25+35	1.67	1.67	1.67	1.67	2.32	3.39	9.00	9.96	0.68	2.75	3.46	3.27	A	1375
	25+25+25+25+50	1.50	1.50	1.50	1.50	3.00	3.61	9.00	10.45	0.68	2.53	3.47	3.56	A	1265
	25+25+25+35+35	1.56	1.56	1.56	2.16	2.16	3.54	9.00	9.97	0.68	2.82	3.46	3.19	B	1410
	25+25+35+35+35	1.44	1.44	2.04	2.04	2.04	3.69	9.00	10.42	0.71	2.75	4.01	3.27	A	1375

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			COP	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX		
SMXS90E7V3B	2.0	2.44	---	---	---	---	1.36	2.44	4.20	0.35	0.68	1.38	3.59	B
	2.5	3.05	---	---	---	---	1.42	3.05	4.65	0.37	0.90	1.48	3.39	C
	3.5	4.27	---	---	---	---	1.54	4.27	5.11	0.39	1.43	1.95	2.99	D
	5.0	6.09	---	---	---	---	1.98	6.09	7.45	0.48	1.80	2.41	3.38	C
	6.0	7.31	---	---	---	---	2.28	7.31	8.53	0.60	2.30	2.89	3.18	D
	7.1	8.65	---	---	---	---	2.60	8.65	9.02	0.67	2.87	3.04	3.01	D
	20+2.0	2.44	2.44	---	---	---	1.69	4.88	6.85	0.39	1.21	1.87	4.03	A
	20+2.5	2.44	3.05	---	---	---	1.84	5.49	7.25	0.41	1.40	2.05	3.92	A
	20+3.5	2.44	4.26	---	---	---	2.13	6.70	7.74	0.50	1.99	2.44	3.37	C
	20+5.0	2.44	6.09	---	---	---	2.57	8.53	9.19	0.60	2.34	2.64	3.65	A
	20+6.0	2.32	6.95	---	---	---	2.86	9.27	9.88	0.65	2.63	2.96	3.52	B
	20+7.1	2.20	7.83	---	---	---	3.17	10.03	10.37	0.69	3.01	3.18	3.33	C
	25+2.5	3.04	3.04	---	---	---	1.98	6.08	7.46	0.47	1.76	2.35	3.45	B
	25+3.5	3.05	4.26	---	---	---	2.28	7.31	8.53	0.60	2.34	2.94	3.12	D
	25+5.0	2.98	5.95	---	---	---	2.72	8.93	9.85	0.63	2.54	2.97	3.52	B
	25+6.0	2.83	6.79	---	---	---	3.00	9.62	9.88	0.67	2.86	3.03	3.36	C
	25+7.1	2.70	7.68	---	---	---	3.31	10.38	10.77	0.72	3.22	3.46	3.22	C
	35+3.5	4.26	4.26	---	---	---	2.57	8.52	9.02	0.65	2.91	3.15	2.93	D
	35+5.0	3.96</												

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			EER	ENERGY LABEL
							MIN	NOM	MAX	MIN	NOM	MAX		
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E								
SMXS90E7V3B	3.5+3.5	3.50	3.50	---	---	---	3.73	10.40	10.75	0.70	2.86	3.03	3.64	A
	3.5+5.0	3.13	4.46	---	---	---	2.57	8.53	9.21	0.57	2.28	2.58	3.74	A
	3.5+6.0	2.93	5.01	---	---	---	2.86	9.27	9.89	0.62	2.57	2.89	3.61	A
	3.5+7.1	2.75	5.58	---	---	---	3.28	10.31	10.67	0.64	2.89	3.06	3.57	B
	5.0+5.0	4.06	4.06	---	---	---	3.56	10.40	10.71	0.68	2.87	3.04	3.62	A
	5.0+6.0	3.85	4.62	---	---	---	3.87	10.40	10.75	0.73	2.86	3.03	3.64	A
	5.0+7.1	3.66	5.20	---	---	---	3.14	9.96	10.36	0.69	2.89	3.12	3.45	B
	6.0+6.0	4.41	4.41	---	---	---	3.56	10.40	10.68	0.69	2.89	3.05	3.60	B
	6.0+7.1	4.12	4.88	---	---	---	3.84	10.40	10.72	0.73	2.87	3.04	3.62	A
	7.1+7.1	4.50	4.50	---	---	---	4.15	10.40	10.75	0.81	2.86	3.03	3.64	A
	2.0+2.0+2.0	2.00	2.00	2.00	---	---	3.99	10.40	11.01	0.71	2.71	2.93	3.84	A
	2.0+2.0+2.5	2.00	2.00	2.50	---	---	4.27	10.40	11.05	0.75	2.63	2.91	3.95	A
	2.0+2.0+3.5	1.93	1.93	3.38	---	---	4.58	10.40	11.08	0.82	2.62	2.90	3.97	A
	2.0+2.0+5.0	1.72	1.72	4.33	---	---	4.55	10.40	11.09	0.82	2.62	2.90	3.97	A
	2.0+2.0+6.0	1.62	1.62	4.88	---	---	4.86	10.40	11.12	0.87	2.61	2.89	3.98	A
	2.0+2.0+7.1	1.53	1.53	5.45	---	---	2.72	8.94	9.88	0.60	2.42	2.89	3.69	A
	2.0+2.5+2.5	2.00	2.50	2.50	---	---	3.00	9.62	9.89	0.67	2.73	2.89	3.52	B
	2.0+2.5+3.5	1.86	2.32	3.24	---	---	3.42	10.40	10.67	0.67	2.89	3.06	3.60	B
	2.0+2.5+5.0	1.67	2.09	4.18	---	---	3.70	10.40	10.71	0.71	2.87	3.04	3.62	A
	2.0+2.5+6.0	1.58	1.98	4.74	---	---	4.01	10.40	10.75	0.78	2.86	3.03	3.64	A
	2.0+2.5+7.1	1.50	1.87	5.31	---	---	3.28	10.31	10.36	0.72	3.12	3.12	3.30	C
	2.0+3.5+3.5	1.73	3.02	3.02	---	---	3.70	10.40	10.68	0.72	2.89	3.05	3.60	B
	2.0+3.5+5.0	1.58	2.77	3.95	---	---	3.99	10.40	10.72	0.76	2.87	3.04	3.62	A
	2.0+3.5+6.0	1.50	2.63	4.52	---	---	4.30	10.40	10.75	0.83	2.86	3.03	3.64	A
	2.0+3.5+7.1	1.43	2.50	5.07	---	---	4.13	10.40	11.01	0.73	2.71	2.93	3.84	A
	2.0+5.0+5.0	1.46	3.68	3.68	---	---	4.41	10.40	11.05	0.78	2.63	2.91	3.95	A
	2.0+5.0+6.0	1.39	3.46	4.15	---	---	4.72	10.40	11.08	0.85	2.62	2.90	3.97	A
	2.0+5.0+7.1	1.28	3.19	4.53	---	---	4.69	10.40	11.09	0.85	2.62	2.90	3.97	A
	2.0+6.0+6.0	1.28	3.86	3.86	---	---	5.00	10.40	11.12	0.90	2.61	2.89	3.98	A
	2.0+6.0+7.1	1.19	3.58	4.23	---	---	3.56	10.38	10.76	0.77	3.12	3.35	3.33	C
	2.5+2.5+2.5	2.41	2.41	2.41	---	---	3.99	10.40	10.69	0.77	2.88	3.05	3.61	A
	2.5+2.5+3.5	2.23	2.23	3.13	---	---	4.27	10.40	10.73	0.84	2.87	3.04	3.62	A
	2.5+2.5+5.0	2.03	2.03	4.06	---	---	4.58	10.40	10.76	0.89	2.86	3.02	3.64	A
	2.5+2.5+6.0	1.93	1.93	4.61	---	---	4.41	10.40	11.01	0.78	2.65	2.93	3.92	A
	2.5+2.5+7.1	1.83	1.83	5.20	---	---	4.69	10.40	11.05	0.86	2.63	2.91	3.95	A
	2.5+3.5+3.5	2.08	2.93	2.93	---	---	5.00	10.40	11.09	0.91	2.62	2.90	3.97	A
	2.5+3.5+5.0	1.93	2.70	3.84	---	---	4.97	10.40	11.09	0.91	2.62	2.90	3.97	A
	2.5+3.5+6.0	1.84	2.57	4.41	---	---	4.83	10.38	11.34	0.83	2.48	2.86	4.19	A
	2.5+3.5+7.1	1.72	2.40	4.88	---	---	2.86	9.28	10.18	0.57	2.39	2.76	3.88	A
	2.5+5.0+5.0	1.80	3.60	3.60	---	---	3.00	9.62	10.18	0.59	2.49	2.76	3.86	A
	2.5+5.0+6.0	1.67	3.33	4.00	---	---	3.28	10.31	11.07	0.63	2.70	3.04	3.82	A
	2.5+5.0+7.1	1.54	3.08	4.38	---	---	3.70	10.40	11.05	0.65	2.63	2.91	3.95	A
	2.5+6.0+6.0	1.56	3.72	3.72	---	---	3.99	10.40	11.09	0.69	2.62	2.90	3.97	A
	2.5+6.0+7.1	1.44	3.46	4.10	---	---	4.30	10.40	11.12	0.74	2.61	2.88	3.98	A
	3.5+3.5+3.5	2.77	2.77	2.77	---	---	3.14	9.96	10.83	0.61	2.60	3.04	3.83	A
	3.5+3.5+5.0	2.57	2.57	3.68	---	---	3.42	10.40	10.73	0.66	2.87	3.04	3.62	A
	3.5+3.5+6.0	2.42	2.42	4.16	---	---	3.84	10.40	11.05	0.67	2.63	2.91	3.95	A
	3.5+3.5+7.1	2.23	2.23	4.54	---	---	4.13	10.40	11.09	0.72	2.62	2.90	3.97	A
	3.5+5.0+5.0	2.34	3.33	3.33	---	---	4.44	10.40	11.12	0.79	2.61	2.88	3.98	A
	3.5+5.0+6.0	2.18	3.10	3.72	---	---	3.70	10.40	10.74	0.71	2.87	3.03	3.62	A
	3.5+5.0+7.1	2.02	2.88	4.10	---	---	4.13	10.40	11.06	0.72	2.63	2.91	3.95	A
	3.5+6.0+6.0	2.04	3.48	3.48	---	---	4.41	10.40	11.10	0.77	2.61	2.89	3.98	A
	5.0+5.0+5.0	3.00	3.00	3.00	---	---	4.72	10.40	11.13	0.84	2.60	2.88	4.00	A
	2.0+2.0+2.0+2.0	1.86	1.86	1.86	1.86	---	4.55	10.40	11.38	0.74	2.46	2.84	4.23	A
	2.0+2.0+2.0+2.5	1.79	1.79	1.79	2.22	---	4.83	10.40	11.42	0.81	2.44	2.82	4.26	A
	2.0+2.0+2.0+3.5	1.67	1.67	1.67	2.93	---	3.28	10.31	11.06	0.64	2.70	3.04	3.82	A
	2.0+2.0+2.0+5.0	1.54	1.54	1.54	3.85	---	3.56	10.40	10.73	0.68	2.87	3.04	3.62	A
	2.0+2.0+2.0+6.0	1.47	1.47	1.47	4.41	---	3.99	10.40	11.05	0.70	2.63	2.91	3.95	A
	2.0+2.0+2.0+7.1	1.37	1.37	1.37	4.89	---	4.27	10.40	11.09	0.74	2.62	2.90	3.97	A
	2.0+2.0+2.5+2.5	1.73	1.73	2.16	2.16	---	4.58	10.40	11.12	0.82	2.61	2.88	3.98	A
	2.0+2.0+2.5+3.5	1.62	1.62	2.03	2.85	---	3.84	10.40	10.74	0.73	2.87	3.03	3.62	A
	2.0+2.0+2.5+5.0	1.50	1.50	1.88	3.77	---	4.27	10.40	11.06	0.75	2.63	2.91	3.95	A
	2.0+2.0+2.5+6.0	1.44	1.44	1.80	4.32	---	4.55	10.40	11.10	0.82	2.61	2.89	3.98	A
	2.0+2.0+2.5+7.1	1.32	1.32	1.65	4.71	---	4.86	10.40	11.13	0.87	2.60	2.88	4.00	A
	2.0+2.0+3.5+3.5	1.54	1.54	2.70	2.70	---	4.69	10.40	11.38	0.76	2.46	2.84	4.23	A
	2.0+2.0+3.5+5.0	1.44	1.44	2.52	3.60	---	4.97	10.40	11.42	0.83	2.44	2.82	4.26	A
	2.0+2.0+3.5+6.0	1.33	1.33	2.34	4.00	---	4.13	10.40	10.74	0.78	2.86	3.03	3.64	A
	2.0+2.0+3.5+7.1	1.23	1.23	2.16	4.38	---	4.55	10.40	11.07	0.83	2.63	2.91	3.95	A
	2.0+2.0+5.0+5.0	1.29	1.29	3.21	3.21	---	4.83	10.40	11.11	0.87	2.61	2.89	3.98	A
	2.0+2.0+5.0+6.0	1.20	1.20	3.00	3.60	---	4.97	10.40	11.39	0.84	2.46	2.84	4.23	A
	2.0+2.5+2.5+2.5	1.67	2.09	2.09	2.09	---	3.42	10.40	10.72	0.66	2.87	3.04	3.62	A
	2.0+2.5+2.5+3.5	1.57	1.98	1.98	2.77	---	3.70	10.40	10.73	0.71	2.87	3.04	3.62	A
	2.0+2.5+2.5+5.0	1.46	1.84	1.84	3.68	---	4.13	10.40	11.05	0.72	2.63	2.91	3.95	A
	2.0+2.5+2.5+6.0	1.39	1.73	1.73	4.15	---	4.41	10.40	11.09	0.77	2.62	2.90	3.97	A
	2.0+2.5+2.5+7.1	1.27	1.60	1.60	4.53	---	4.72	10.40	11.12	0.84	2.61	2.88	3.98	A
	2.0+2.5+3.5+3.5	1.50	1.89	2.63	2.63	---	3.99	10.40	10.74					

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			EER	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX		
SMXS90E7V3B	25+25+25+35	236	236	236	332	---	3.70	10.40	10.73	0.71	2.87	3.04	3.62	A
	25+25+25+50	208	2.08	2.08	4.16	---	4.13	10.40	11.05	0.72	2.63	2.91	3.95	A
	25+25+25+60	193	1.93	1.93	4.61	---	4.41	10.40	11.09	0.77	2.62	2.90	3.97	A
	25+25+25+71	1.78	1.78	1.78	5.06	---	4.72	10.40	11.12	0.84	2.61	2.88	3.98	A
	25+25+35+35	217	2.17	3.03	3.03	---	3.99	10.40	10.74	0.76	2.87	3.03	3.62	A
	25+25+35+50	1.93	1.93	2.70	3.84	---	4.41	10.40	11.06	0.77	2.63	2.91	3.95	A
	25+25+35+60	1.79	1.79	2.51	4.31	---	4.69	10.40	11.10	0.85	2.61	2.89	3.98	A
	25+25+35+71	1.67	1.67	2.33	4.73	---	5.00	10.40	11.13	0.90	2.60	2.88	4.00	A
	25+25+50+50	1.73	1.73	3.47	3.47	---	4.83	10.40	11.38	0.82	2.46	2.84	4.23	A
	25+35+35+35	200	2.8	2.80	2.80	---	4.27	10.40	10.74	0.84	2.86	3.03	3.64	A
	25+35+35+50	1.79	2.51	2.51	3.59	---	4.69	10.40	11.07	0.85	2.63	2.91	3.95	A
	25+35+35+60	1.67	2.35	2.35	4.03	---	4.97	10.40	11.11	0.90	2.61	2.89	3.98	A
	35+35+35+35	260	2.60	2.60	2.60	---	4.55	10.40	10.75	0.89	2.86	3.03	3.64	A
	35+35+35+50	235	2.35	2.35	3.35	---	4.97	10.40	11.08	0.91	2.62	2.90	3.97	A
	20+20+20+20+20	208	2.08	2.08	2.08	2.08	3.42	10.40	11.10	0.58	2.62	2.89	3.97	A
	20+20+20+20+25	198	1.98	1.98	1.98	2.48	3.56	10.40	11.10	0.60	2.62	2.89	3.97	A
	20+20+20+20+35	1.81	1.81	1.81	1.81	3.16	3.84	10.40	11.11	0.67	2.61	2.89	3.98	A
	20+20+20+20+50	1.60	1.60	1.60	1.60	4.00	4.27	10.40	11.43	0.68	2.44	2.82	4.26	A
	20+20+20+20+60	1.49	1.49	1.49	1.49	4.44	4.55	10.40	11.47	0.72	2.38	2.81	4.37	A
	20+20+20+20+71	1.38	1.38	1.38	1.38	4.88	4.86	10.40	11.50	0.79	2.36	2.79	4.41	A
	20+20+20+25+25	1.90	1.90	1.90	2.35	2.35	3.70	10.40	11.10	0.62	2.62	2.89	3.97	A
	20+20+20+25+35	1.73	1.73	2.17	3.04	3.99	10.40	11.11	0.69	2.61	2.89	3.98	A	
	20+20+20+25+50	1.54	1.54	1.54	1.93	3.85	4.41	10.40	11.43	0.70	2.44	2.82	4.26	A
	20+20+20+25+60	1.43	1.43	1.43	1.80	4.31	4.69	10.40	11.47	0.74	2.38	2.81	4.37	A
	20+20+20+25+71	1.33	1.33	1.33	1.67	4.74	5.00	10.40	11.50	0.82	2.36	2.79	4.41	A
	20+20+20+35+35	1.90	1.90	1.90	2.35	2.35	3.70	10.40	11.10	0.62	2.62	2.89	3.97	A
	20+20+20+35+50	1.43	1.43	1.43	2.51	3.60	4.69	10.40	11.44	0.75	2.44	2.82	4.26	A
	20+20+20+35+60	1.34	1.34	1.34	2.35	4.03	4.97	10.40	11.48	0.82	2.37	2.80	4.39	A
	20+20+25+25+25	1.81	1.81	2.26	2.26	2.26	3.84	10.40	11.10	0.67	2.62	2.89	3.97	A
	20+20+25+25+35	1.66	1.66	2.08	2.08	2.92	4.13	10.40	11.11	0.71	2.61	2.89	3.98	A
	20+20+25+25+50	1.49	1.49	1.86	1.86	3.70	4.55	10.40	11.43	0.73	2.44	2.82	4.26	A
	20+20+25+25+60	1.39	1.39	1.73	1.73	4.16	4.83	10.40	11.47	0.80	2.38	2.81	4.37	A
	20+20+25+35+35	1.54	1.54	1.92	2.70	2.70	4.41	10.40	11.11	0.76	2.61	2.89	3.98	A
	20+20+25+35+50	1.39	1.39	1.72	2.43	3.47	4.83	10.40	11.44	0.80	2.44	2.82	4.26	A
	20+20+35+35+35	1.44	1.44	2.52	2.50	2.50	4.69	10.40	11.12	0.84	2.61	2.89	3.98	A
	20+25+25+25+25	1.72	2.17	2.17	2.17	2.17	3.99	10.40	11.10	0.69	2.62	2.89	3.97	A
	20+25+25+25+35	1.60	2.00	2.00	2.00	2.80	4.27	10.40	11.11	0.74	2.61	2.89	3.98	A
	20+25+25+25+50	1.44	1.79	1.79	1.79	3.59	4.69	10.40	11.43	0.75	2.44	2.82	4.26	A
	20+25+25+25+60	1.33	1.68	1.68	1.68	4.03	4.97	10.40	11.47	0.82	2.38	2.81	4.37	A
	20+25+25+35+35	1.48	1.86	1.86	2.60	2.60	4.55	10.40	11.11	0.82	2.61	2.89	3.98	A
	20+25+25+35+50	1.34	1.68	1.68	2.35	3.35	4.97	10.40	11.44	0.83	2.44	2.82	4.26	A
	20+25+35+35+35	1.38	1.73	2.43	2.43	2.43	4.83	10.40	11.12	0.87	2.61	2.89	3.98	A
	25+25+25+25+25	208	2.08	2.08	2.08	2.08	4.13	10.40	11.10	0.72	2.62	2.89	3.97	A
	25+25+25+25+35	1.93	1.93	1.93	1.93	2.68	4.41	10.40	11.11	0.77	2.61	2.89	3.98	A
	25+25+25+25+50	1.73	1.73	1.73	1.73	3.48	4.83	10.40	11.43	0.81	2.44	2.82	4.26	A
	25+25+25+35+35	1.80	1.80	1.80	2.50	2.50	4.69	10.40	11.11	0.85	2.61	2.89	3.98	A
	25+25+35+35+35	1.69	1.69	2.34	2.34	2.34	4.97	10.40	11.12	0.90	2.61	2.89	3.98	A

Note: connected to 2.0, 2.5, 3.5 class: wall mounted D type / 5.0, 6.0, 7.0 class: wall mounted E type

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
SMXS90E7V3B	2.0	200	---	---	---	---	1.88	2.00	3.03	0.45	0.56	1.02	3.57	A	280
	2.5	250	---	---	---	---	2.00	250	3.54	0.49	0.71	1.22	3.52	A	355
	3.5	350	---	---	---	---	2.05	350	4.80	0.52	1.14	1.47	3.07	B	570
	5.0	500	---	---	---	---	2.22	5.00	5.82	0.49	1.52	1.79	3.29	A	760
	6.0	600	---	---	---	---	2.33	6.00	6.60	0.50	1.89	2.24	3.17	B	945
	7.1	710	---	---	---	---	2.45	7.10	7.38	0.53	2.57	2.74	2.76	D	1285
	20+20	200	2.00	---	---	---	2.11	4.00	5.28	0.49	1.14	1.79	3.51	A	570
	20+25	200	2.50	---	---	---	2.16	4.50	5.70	0.49	1.30	1.79	3.46	A	650
	20+35	200	3.50	---	---	---	2.27	5.50	6.32	0.49	1.70	2.09	3.24	A	850
	20+50	200	5.00	---	---	---	2.44	7.00	7.31	0.50	2.22	2.39	3.15	B	1110
	20+60	186	5.56	---	---	---	2.58	7.42	7.96	0.54	2.45	2.81	3.03	B	1225
	20+71	1.71	6.09	---	---	---	2.74	7.80	8.44	0.57	2.69	3.13	2.90	C	1345
	25+25	250	2.50	---	---	---	2.22	5.00	6.15	0.46	1.38	1.99	3.62	A	690
	25+35	250	3.50	---	---	---	2.33	6.00	6.60	0.49	1.94	2.29	3.09	B	970
	25+50	241	4.83	---	---	---	2.51	7.24	7.64	0.54	2.39	2.62	3.03	B	1195
	25+60	223	5.36	---	---	---	2.66	7.59	8.25	0.57	2.57	2.99	2.95	C	1285
	25+71	2.08	5.90	---	---	---	2.82	7.98	8.44	0.60	2.81	3.13	2.84	C	1405
	35+35	350	3.50	---	---	---	2.44	7.00	7.31	0.53	2.51	2.74	2.79	D	1255
	35+50	313	4.46	---	---	---	2.66	7.59	8.21	0.57	2.56	2.99	2.96	C	1280
	35+60	293	5.01	---	---	---	2.80	7.94	8.42	0.60	2.81	3.12	2.83	C	1405
	35+71	275	5.58	---	---	---	2.96	8.33	8.44	0.64	3.06	3.13	2.72	D	1530
	50+50	406	4.06	---	---	---	2.88	8.12	9.02						

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (kW)					TOTAL CAPACITY (kW)			POWER INPUT COOLING (kW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
		2.0+2.0+5.0	1.72	4.33	--	--	2.73	7.77	8.53	0.58	2.38	2.87	3.26	A	1190
SMXS90E7V3B	2.0+2.0+6.0	1.62	1.62	4.88	--	--	2.88	8.12	9.03	0.61	2.62	3.21	3.10	B	1310
	2.0+2.0+7.1	1.53	1.53	5.45	--	--	3.04	8.51	9.25	0.61	2.81	3.35	3.03	B	1405
	2.0+2.5+2.5	2.00	2.50	2.50	--	--	2.44	7.00	7.31	0.50	2.22	2.39	3.15	B	1110
	2.0+2.5+3.5	1.86	2.32	3.24	--	--	2.58	7.42	7.96	0.54	2.51	2.87	2.96	C	1255
	2.0+2.5+5.0	1.67	2.09	4.18	--	--	2.80	7.94	8.78	0.58	2.49	3.07	3.19	B	1245
	2.0+2.5+6.0	1.58	1.98	4.74	--	--	2.95	8.30	9.05	0.61	2.68	3.21	3.10	B	1340
	2.0+2.5+7.1	1.50	1.87	5.31	--	--	3.11	8.68	9.25	0.64	2.94	3.35	2.95	C	1470
	2.0+3.5+3.5	1.73	3.02	3.02	--	--	2.73	7.77	8.38	0.57	2.74	3.12	2.84	C	1370
	2.0+3.5+5.0	1.58	2.77	3.95	--	--	2.95	8.30	9.01	0.61	2.74	3.21	3.03	B	1370
	2.0+3.5+6.0	1.50	2.63	4.52	--	--	3.10	8.65	9.23	0.64	2.94	3.35	2.94	C	1470
	2.0+3.5+7.1	1.43	2.50	5.07	--	--	3.26	9.00	9.25	0.68	3.21	3.35	2.80	C	1605
	2.0+5.0+5.0	1.46	3.68	3.68	--	--	3.17	8.82	9.81	0.64	2.74	3.44	3.22	A	1370
	2.0+5.0+6.0	1.39	3.46	4.15	--	--	3.32	9.00	9.87	0.64	2.81	3.45	3.20	A	1405
	2.0+5.0+7.1	1.28	3.19	4.53	--	--	3.48	9.00	9.89	0.68	2.74	3.45	3.28	A	1370
	2.0+6.0+6.0	1.28	3.86	3.86	--	--	3.46	9.00	9.90	0.68	2.68	3.45	3.36	A	1340
	2.0+6.0+7.1	1.19	3.58	4.23	--	--	3.63	9.00	10.37	0.71	2.61	4.00	3.45	A	1305
	2.5+2.5+2.5	2.41	2.41	2.41	--	--	2.51	7.23	7.64	0.54	2.39	2.62	3.03	B	1195
	2.5+2.5+3.5	2.23	2.23	3.13	--	--	2.66	7.59	8.21	0.57	2.62	2.99	2.90	C	1310
	2.5+2.5+5.0	2.03	2.03	4.06	--	--	2.88	8.12	9.01	0.61	2.62	3.21	3.10	B	1310
	2.5+2.5+6.0	1.93	1.93	4.61	--	--	3.02	8.47	9.05	0.61	2.81	3.21	3.01	B	1405
	2.5+2.5+7.1	1.83	1.83	5.20	--	--	3.19	8.86	9.25	0.64	3.08	3.35	2.88	C	1540
	2.5+3.5+3.5	2.08	2.93	2.93	--	--	2.80	7.94	8.38	0.60	2.80	3.12	2.84	C	1400
	2.5+3.5+5.0	1.93	2.70	3.84	--	--	3.02	8.47	9.01	0.61	2.87	3.21	2.95	C	1435
	2.5+3.5+6.0	1.84	2.57	4.41	--	--	3.17	8.82	9.23	0.64	3.07	3.35	2.87	C	1535
	2.5+3.5+7.1	1.72	2.40	4.88	--	--	3.33	9.00	9.25	0.68	3.21	3.35	2.80	C	1605
SMXS90E7V3B	2.5+5.0+5.0	1.80	3.60	3.60	--	--	3.24	9.00	9.83	0.64	2.87	3.44	3.14	B	1435
	2.5+5.0+6.0	1.67	3.33	4.00	--	--	3.39	9.00	9.87	0.68	2.87	3.45	3.14	B	1435
	2.5+5.0+7.1	1.54	3.08	4.38	--	--	3.55	9.00	9.89	0.71	2.74	3.45	3.28	A	1370
	2.5+6.0+6.0	1.56	3.72	3.72	--	--	3.54	9.00	9.90	0.71	2.74	3.45	3.28	A	1370
	2.5+6.0+7.1	1.44	3.46	4.10	--	--	3.70	9.00	10.37	0.71	2.68	4.00	3.36	A	1340
	3.5+3.5+3.5	2.77	2.77	2.77	--	--	2.95	8.31	8.50	0.64	3.12	3.25	2.66	D	1560
	3.5+3.5+5.0	2.57	2.57	3.68	--	--	3.17	8.82	9.19	0.64	3.07	3.34	2.87	C	1535
	3.5+3.5+6.0	2.42	2.42	4.16	--	--	3.32	9.00	9.23	0.68	3.14	3.35	2.87	C	1570
	3.5+3.5+7.1	2.23	2.23	4.54	--	--	3.48	9.00	9.25	0.71	3.08	3.35	2.92	C	1540
	3.5+5.0+5.0	2.34	3.33	3.33	--	--	3.39	9.00	9.83	0.68	2.87	3.44	3.14	B	1435
	3.5+5.0+6.0	2.18	3.10	3.72	--	--	3.54	9.00	9.87	0.71	2.87	3.45	3.14	B	1435
	3.5+5.0+7.1	2.02	2.88	4.10	--	--	3.70	9.00	10.34	0.71	2.74	3.99	3.28	A	1370
	3.5+6.0+6.0	2.04	3.48	3.48	--	--	3.69	9.00	10.35	0.71	2.74	3.99	3.28	A	1370
	5.0+5.0+5.0	3.00	3.00	3.00	--	--	3.61	9.00	10.45	0.68	2.52	3.54	3.57	A	1260
	2.0+2.0+2.0+2.0	1.86	1.86	1.86	--	--	2.58	7.44	7.96	0.54	2.09	2.38	3.56	A	1045
	2.0+2.0+2.0+2.5	1.79	1.79	2.22	--	--	2.66	7.59	8.25	0.54	2.15	2.56	3.53	A	1075
	2.0+2.0+2.0+3.5	1.67	1.67	2.93	--	--	2.80	7.94	8.78	0.58	2.38	2.87	3.34	A	1190
	2.0+2.0+2.0+5.0	1.54	1.54	1.54	3.85	--	3.02	8.47	9.45	0.61	2.54	3.15	3.33	A	1270
	2.0+2.0+2.0+6.0	1.47	1.47	1.47	4.41	--	3.17	8.82	9.81	0.64	2.74	3.45	3.22	A	1370
	2.0+2.0+2.0+7.1	1.37	1.37	4.89	--	--	3.33	9.00	9.89	0.64	2.81	3.45	3.20	A	1405
	2.0+2.0+2.5+2.5	1.73	1.73	2.16	2.16	--	2.73	7.78	8.53	0.58	2.26	2.74	3.44	A	1130
	2.0+2.0+2.5+3.5	1.62	1.62	2.03	2.85	--	2.88	8.12	9.01	0.61	2.62	3.21	3.10	B	1310
	2.0+2.0+2.5+5.0	1.50	1.50	1.88	3.77	--	3.10	8.65	9.64	0.61	2.61	3.29	3.31	A	1305
	2.0+2.0+2.5+6.0	1.44	1.44	1.80	4.32	--	3.24	9.00	9.87	0.64	2.87	3.45	3.14	B	1435
	2.0+2.0+2.5+7.1	1.32	1.32	1.65	4.71	--	3.41	9.00	9.89	0.68	2.81	3.45	3.20	A	1405
	2.0+2.0+3.5+3.5	1.54	1.54	2.70	2.70	--	3.02	8.48	9.01	0.61	2.87	3.21	2.95	C	1435
	2.0+2.0+3.5+5.0	1.44	1.44	2.52	3.60	--	3.24	9.00	9.83	0.64	2.87	3.44	3.14	B	1435
	2.0+2.0+3.5+6.0	1.33	1.33	2.34	4.00	--	3.39	9.00	9.87	0.68	2.81	3.45	3.20	A	1405
	2.0+2.0+3.5+7.1	1.23	1.23	2.16	4.38	--	3.55	9.00	9.89	0.71	2.74	3.45	3.28	A	1370
	2.0+2.0+5.0+5.0	1.29	1.29	3.21	3.21	--	3.46	9.00	10.31	0.68	2.52	3.46	3.57	A	1260
	2.0+2.0+5.0+6.0	1.20	1.20	3.00	3.60	--	3.61	9.00	10.45	0.68	2.52	3.54	3.57	A	1260
	2.0+2.5+2.5+2.5	1.67	2.09	2.09	--	--	2.80	7.94	8.78	0.58	2.38	2.87	3.34	A	1190
SMXS90E7V3B	2.0+2.5+2.5+3.5	1.57	1.98	2.77	--	--	2.95	8.30	9.01	0.61	2.74	3.21	3.03	B	1370
	2.0+2.5+2.5+5.0	1.46	1.84	1.84	3.68	--	3.17	8.82	9.81	0.64	2.74	3.44	3.22	A	1370
	2.0+2.5+2.5+6.0	1.39	1.73	1.73	4.15	--	3.32	9.00	9.87	0.64	2.81	3.45	3.20	A	1405
	2.0+2.5+2.5+7.1	1.27	1.60	1.60	4.53	--	3.48	9.00	9.89	0.68	2.74	3.45	3.28	A	1370
	2.0+2.5+3.5+3.5	1.50	1.89	2.63	2.63	--	3.10	8.65	9.19	0.64	3.00	3.34	2.88	C	1500
	2.0+2.5+3.5+5.0	1.39	1.73	2.42	3.46	--	3.32	9.00	9.83	0.64	2.87	3.44	3.14	B	1435
	2.0+2.5+3.5+6.0	1.28	1.61	2.25	3.86	--	3.46	9.00	9.87	0.68	2.81	3.45	3.20	A	1405
	2.0+2.5+3.5+7.1	1.19	1.49	2.09	4.23	--	3.63	9.00	10.33	0.71	2.74	3.99	3.28	A	1370
	2.0+2.5+5.0+5.0	1.25	1.55	3.10	3.10	--	3.54	9.00	10.38	0.68	2.52	3.54	3.57	A	1260
	2.0+2.5+5.0+6.0	1.17	1.45	2.90	3.48	--	3.69	9.00	10.49	0.71	2.52	3.54	3.57	A	1260
	2.0+3.5+3.5+3.5	1.44	2.52	2.52	2.52	--	3.24	9.00	9.19	0.68	3.21	3.34	2.80	C	1605
	2.0+3.5+3.5+5.0	1.29	2.25	2.25	3.21	--	3.46	9.00	10.33	0.71	2.81	3.44	3.14	B	1435
	2.0+3.5+3.5+6.0	1.20	2.10	2.10	3.60	--	3.61	9.00	10.31	0.71	2.81	3.99	3.20	A	1405
	2.0+3.														

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)	
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX				
<b>SMXS90E7V3B</b>	35+3.5+3.5+3.5	2.25	2.25	2.25	2.25	---	3.46	9.00	9.19	0.71	3.21	3.34	2.80	C	1605	
	35+3.5+3.5+5.0	2.03	2.03	2.03	2.91	---	3.69	9.00	10.27	0.71	2.87	3.98	3.14	B	1435	
	20+2.0+2.0+2.0+2.0	1.63	1.63	1.63	1.63	1.63	2.88	8.15	9.03	0.58	2.35	2.87	3.47	A	1175	
	20+2.0+2.0+2.0+2.5	1.58	1.58	1.58	1.58	1.98	2.95	8.30	9.25	0.58	2.42	3.01	3.43	A	1210	
	20+2.0+2.0+2.0+3.5	1.50	1.50	1.50	2.65	3.10	8.65	9.64	10.09	0.61	2.61	3.37	3.31	A	1305	
	20+2.0+2.0+2.0+5.0	1.38	1.38	1.38	3.48	3.32	9.00	10.09	10.65	0.55	2.52	3.30	3.57	A	1260	
	20+2.0+2.0+2.0+6.0	1.29	1.29	1.29	3.84	3.46	9.00	10.31	10.65	0.55	2.56	3.46	3.52	A	1280	
	20+2.0+2.0+2.0+7.1	1.19	1.19	1.19	4.24	3.63	9.00	10.46	10.68	0.55	2.52	3.55	3.57	A	1260	
	20+2.0+2.0+2.5+2.5	1.54	1.54	1.54	1.92	1.92	3.02	8.46	9.45	0.61	2.54	3.22	3.33	A	1270	
	20+2.0+2.0+2.5+3.5	1.47	1.47	1.47	1.84	2.57	3.17	8.82	9.81	0.64	2.74	3.44	3.22	A	1370	
	20+2.0+2.0+2.5+5.0	1.33	1.33	1.33	1.67	3.34	3.39	9.00	10.21	0.65	2.52	3.38	3.57	A	1260	
	20+2.0+2.0+2.5+6.0	1.24	1.24	1.24	1.55	3.73	3.54	9.00	10.38	0.68	2.56	3.46	3.52	A	1280	
	20+2.0+2.0+2.5+7.1	1.15	1.15	1.15	1.44	4.11	3.70	9.00	10.50	0.71	2.52	3.55	3.57	A	1260	
	20+2.0+2.0+3.5+3.5	1.54	1.54	1.54	1.92	1.92	3.02	8.46	9.45	0.61	2.54	3.22	3.33	A	1270	
	20+2.0+2.0+3.5+5.0	1.24	1.24	1.24	2.17	3.11	3.54	9.00	10.38	0.68	2.56	3.54	3.52	A	1280	
	20+2.0+2.0+3.5+6.0	1.16	1.16	1.16	2.03	3.49	3.69	9.00	10.49	0.71	2.52	3.54	3.57	A	1260	
	20+2.0+2.5+2.5+2.5	1.51	1.51	1.51	1.88	1.88	3.10	8.66	9.64	0.61	2.67	3.37	3.24	A	1335	
	20+2.0+2.5+2.5+3.5	1.44	1.44	1.44	1.80	2.52	3.24	9.00	9.83	0.64	2.87	3.44	3.14	B	1435	
	20+2.0+2.5+2.5+5.0	1.29	1.29	1.29	1.61	1.61	3.20	3.46	9.00	10.31	0.68	2.52	3.46	3.57	A	1260
	20+2.0+2.5+2.5+6.0	1.20	1.20	1.20	1.50	3.60	3.61	9.00	10.45	0.68	2.52	3.54	3.57	A	1260	
	20+2.0+2.5+3.5+3.5	1.33	1.33	1.68	2.33	2.33	3.39	9.00	9.83	0.68	2.87	3.44	3.14	B	1435	
	20+2.0+2.5+3.5+5.0	1.20	1.20	1.50	2.10	3.00	3.61	9.00	10.45	0.68	2.52	3.54	3.57	A	1260	
	20+2.0+3.5+3.5+3.5	1.23	1.23	2.18	2.18	2.18	3.54	9.00	9.83	0.71	2.87	3.44	3.14	B	1435	
	20+2.5+2.5+2.5+2.5	1.46	1.84	1.84	1.84	1.84	3.17	8.82	9.81	0.64	2.74	3.44	3.22	A	1370	
	20+2.5+2.5+2.5+3.5	1.39	1.73	1.73	2.42	3.32	9.00	9.83	0.64	2.87	3.44	3.14	B	1435		
	20+2.5+2.5+2.5+5.0	1.25	1.55	1.55	3.10	3.54	9.00	10.38	0.68	2.52	3.54	3.57	A	1260		
	20+2.5+2.5+2.5+6.0	1.17	1.45	1.45	1.45	3.48	3.69	9.00	10.49	0.71	2.52	3.54	3.57	A	1260	
	20+2.5+2.5+3.5+3.5	1.28	1.61	1.61	2.25	2.25	3.46	9.00	9.83	0.68	2.87	3.44	3.14	B	1435	
	20+2.5+2.5+3.5+5.0	1.17	1.45	1.45	2.03	2.90	3.69	9.00	10.49	0.71	2.52	3.62	3.57	A	1260	
	20+2.5+3.5+3.5+3.5	1.20	1.50	2.10	2.10	2.10	3.61	9.00	10.27	0.71	2.87	3.98	3.14	B	1435	
	25+2.5+2.5+2.5+2.5	1.80	1.80	1.80	1.80	1.80	3.24	9.00	9.83	0.64	2.87	3.44	3.14	B	1435	
	25+2.5+2.5+2.5+3.5	1.67	1.67	1.67	1.67	2.32	3.39	9.00	9.83	0.68	2.80	3.44	3.21	A	1400	
	25+2.5+2.5+2.5+5.0	1.50	1.50	1.50	3.00	3.61	9.00	10.45	0.68	2.52	3.54	3.57	A	1260		
	25+2.5+2.5+3.5+3.5	1.56	1.56	1.56	2.16	2.16	3.54	9.00	9.83	0.71	2.87	3.44	3.14	B	1435	
	25+2.5+3.5+3.5+3.5	1.44	1.44	2.04	2.04	2.04	3.69	9.00	10.27	0.75	2.80	3.98	3.21	A	1400	

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			EER	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX		
<b>SMXS90E7V3B</b>	2.0	2.44	---	---	---	---	1.36	2.44	4.20	0.35	0.71	1.38	3.44	B
	2.5	3.05	---	---	---	---	1.42	3.05	4.65	0.37	0.90	1.49	3.39	C
	3.5	4.27	---	---	---	---	1.54	4.27	5.11	0.39	1.43	1.96	2.99	D
	5.0	6.09	---	---	---	---	1.98	6.09	7.45	0.48	1.80	2.41	3.38	C
	6.0	7.31	---	---	---	---	2.28	7.31	8.53	0.60	2.30	2.89	3.18	D
	7.1	8.65	---	---	---	---	2.60	8.65	9.02	0.67	2.87	3.04	3.01	D
	20+2.0	2.44	2.44	---	---	---	1.69	4.88	6.85	0.39	1.23	1.89	3.97	A
	20+2.5	2.44	3.05	---	---	---	1.84	5.49	7.25	0.43	1.42	2.07	3.87	A
	20+3.5	2.44	4.26	---	---	---	2.13	6.70	7.73	0.50	2.01	2.46	3.33	C
	20+5.0	2.44	6.09	---	---	---	2.57	8.53	9.17	0.61	2.35	2.66	3.63	A
	20+6.0	2.32	6.95	---	---	---	2.86	9.27	9.85	0.65	2.64	2.97	3.51	B
	20+7.1	2.20	7.83	---	---	---	3.17	10.03	10.34	0.70	3.02	3.19	3.32	C
	25+2.5	3.04	3.04	---	---	---	1.98	6.08	7.45	0.48	1.78	2.37	3.42	B
	25+3.5	3.05	4.26	---	---	---	2.28	7.31	8.51	0.63	2.36	2.96	3.10	D
	25+5.0	2.98	5.95	---	---	---	2.72	8.93	9.82	0.63	2.55	2.93	3.50	B
	25+6.0	2.83	6.79	---	---	---	3.00	9.62	9.85	0.68	2.87	3.04	3.35	C
	25+7.1	2.70	7.68	---	---	---	3.31	10.38	10.74	0.72	3.29	3.47	3.16	D
	35+3.5	4.27	4.27	---	---	---	2.57	8.54	8.99	0.68	2.93	3.18	2.91	D
	35+5.0	3.96	5.66	---	---	---	3.00	9.62	9.83	0.68	2.81	2.98	3.42	B
	35+6.0	3.80	6.51	---	---	---	3.28	10.31	10.31	0.73	3.20	3.20	3.22	C
	35+7.1	3.43	6.97	---	---	---	3.59	10.40	10.75	0.77	3.18	3.36	3.27	C
	50+5.0	5.20	5.20	---	---	---	3.42	10.40	10.63	0.67	2.96	3.08	3.51	B
	50+6.0	4.73	5.67	---	---	---	3.70	10.40	10.67	0.72	2.89	3.06	3.60	B
	50+7.1	4.30	6.10	---	---	---	4.01	10.40	10.70	0.79	2.88	3.05	3.61	A
	60+6.0	5.20	5.20	---	---	---	3.99	10.40	10.71	0.76	2.88	3.04	3.61	A
	60+7.1	4.76	5.64	---	---	---	4.30	10.40	10.74	0.84	2.86	3.03	3.64	A
	7.1+7.1	5.20	5.20	---	---	---	4.61	10.40	10.77	0.89	2.85	3.02	3.65	A
	20+2.0+2.0	2.44	2.44	---	---	---	2.28	7.32	8.64	0.56	1.86	2.36	3.94	A
	20+2.0+2.5	2.44	3.04	---	---	---	2.43	7.92	9.16	0.59	2.08	2.61	3.81	A
	20+2.0+3.5	2.38	2.38	4.17	---	---	2.72	8.93	9.81	0.63	2.50	2.87	3.57	B
	20+2.0+5.0	2.21	2.21	5.54	---	---	3.14	9.96	10.61	0.63	2.74	3.08	3.64	A
	20+2.0+6.0	2.08	2.08	6.24	---	---	3.42	10.40	10.65	0.67	2.95	3.07	3.53	B
	20+2.0+7.1	1.87	1.87	6.66	---	---	3.73	10.40	10.68	0.71	2.89	3.05	3.60	B

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			EER	ENERGY LABEL
							MIN	NOM	MAX	MIN	NOM	MAX		
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E								
SMXS90E7V3B	20+50+7.1	1.47	3.69	24	---	---	4.58	10.40	11.05	0.83	2.63	2.91	3.95	A
	20+60+6.0	1.48	4.46	4.46	---	---	4.55	10.40	11.05	0.83	2.63	2.91	3.95	A
	20+60+7.1	1.38	4.13	4.89	---	---	4.86	10.40	11.09	0.88	2.62	2.90	3.97	A
	25+25+2.5	2.98	2.98	2.98	---	---	2.72	8.94	9.81	0.64	2.51	2.93	3.56	B
	25+25+3.5	2.83	2.83	3.96	---	---	3.00	9.62	9.81	0.68	2.82	2.87	3.41	B
	25+25+5.0	2.60	2.60	5.20	---	---	3.42	10.40	10.61	0.68	2.97	3.08	3.50	B
	25+25+6.0	2.36	2.36	5.68	---	---	3.70	10.40	10.65	0.72	2.95	3.07	3.53	B
	25+25+7.1	2.15	2.15	6.10	---	---	4.01	10.40	10.68	0.79	2.89	3.05	3.60	B
	25+35+3.5	2.71	3.80	3.80	---	---	3.28	10.31	10.27	0.73	3.16	3.16	3.26	C
	25+35+5.0	2.36	3.31	4.73	---	---	3.70	10.40	10.62	0.73	2.97	3.08	3.50	B
	25+35+6.0	2.17	3.03	5.20	---	---	3.99	10.40	10.66	0.77	2.89	3.06	3.60	B
	25+35+7.1	1.98	2.78	5.64	---	---	4.30	10.40	10.69	0.85	2.88	3.05	3.61	A
	25+50+5.0	2.08	4.16	4.16	---	---	4.13	10.40	10.97	0.74	2.72	2.94	3.82	A
	25+50+6.0	1.93	3.85	4.62	---	---	4.41	10.40	11.01	0.78	2.65	2.93	3.92	A
	25+50+7.1	1.78	3.56	5.06	---	---	4.72	10.40	11.05	0.86	2.63	2.91	3.95	A
	25+60+6.0	1.80	4.30	4.30	---	---	4.69	10.40	11.05	0.86	2.63	2.91	3.95	A
	25+60+7.1	1.67	4.00	4.73	---	---	5.00	10.40	11.09	0.91	2.62	2.90	3.97	A
	35+35+3.5	3.46	3.46	3.46	---	---	3.56	10.38	10.67	0.79	3.21	3.39	3.23	C
	35+35+5.0	3.03	3.03	4.34	---	---	3.99	10.40	10.63	0.80	2.96	3.07	3.51	B
	35+35+6.0	2.80	2.80	4.80	---	---	4.27	10.40	10.67	0.85	2.89	3.06	3.60	B
	35+35+7.1	2.58	2.58	5.24	---	---	4.58	10.40	10.70	0.90	2.88	3.05	3.61	A
	35+50+5.0	2.70	3.85	3.85	---	---	4.41	10.40	10.98	0.79	2.72	2.94	3.82	A
	35+50+6.0	2.51	3.59	4.30	---	---	4.69	10.40	11.02	0.86	2.64	2.92	3.94	A
	35+50+7.1	2.34	3.33	4.73	---	---	5.00	10.40	11.06	0.91	2.63	2.91	3.95	A
	35+60+6.0	2.34	4.03	4.03	---	---	4.97	10.40	11.06	0.91	2.63	2.91	3.95	A
	50+50+5.0	3.46	3.46	3.46	---	---	4.83	10.38	11.34	0.83	2.48	2.86	4.19	A
SMXS90E7V3B	20+20+2.0+2.0	2.32	2.32	2.32	2.32	---	2.86	9.28	10.08	0.59	2.44	2.80	3.80	A
	20+2.0+2.0+2.5	2.26	2.26	2.26	2.84	---	3.00	9.62	10.08	0.61	2.59	2.80	3.71	A
	20+2.0+2.0+3.5	2.17	2.17	2.17	3.80	---	3.28	10.31	10.94	0.65	2.74	3.09	3.76	A
	20+2.0+2.0+5.0	1.89	1.89	1.89	4.73	---	3.70	10.40	10.96	0.67	2.73	2.95	3.81	A
	20+2.0+2.0+6.0	1.73	1.73	1.73	5.21	---	3.99	10.40	11.00	0.71	2.71	2.93	3.84	A
	20+2.0+2.0+7.1	1.59	1.59	1.59	5.63	---	4.30	10.40	11.03	0.78	2.64	2.92	3.94	A
	20+2.0+2.5+2.5	2.21	2.21	2.77	2.77	---	3.14	9.96	10.70	0.63	2.70	3.09	3.69	A
	20+2.0+2.5+3.5	2.08	2.08	2.60	3.64	---	3.42	10.40	10.60	0.68	2.97	3.09	3.50	B
	20+2.0+2.5+5.0	1.81	1.81	2.26	4.52	---	3.84	10.40	10.96	0.69	2.73	2.95	3.81	A
	20+2.0+2.5+6.0	1.66	1.66	2.08	5.00	---	4.13	10.40	11.00	0.73	2.71	2.93	3.84	A
	20+2.0+2.5+7.1	1.53	1.53	1.91	5.43	---	4.44	10.40	11.03	0.81	2.64	2.92	3.94	A
	20+2.0+3.5+3.5	1.89	1.89	3.31	3.31	---	3.70	10.40	10.61	0.73	2.97	3.08	3.50	B
	20+2.0+3.5+5.0	1.66	1.66	2.91	4.17	---	4.13	10.40	10.97	0.74	2.73	2.95	3.81	A
	20+2.0+3.5+6.0	1.54	1.54	2.70	4.62	---	4.41	10.40	11.01	0.79	2.71	2.93	3.84	A
	20+2.0+3.5+7.1	1.42	1.42	2.49	5.07	---	4.72	10.40	11.04	0.86	2.64	2.92	3.94	A
	20+2.0+5.0+5.0	1.49	1.49	3.71	3.71	---	4.55	10.40	11.32	0.75	2.48	2.86	4.19	A
	20+2.0+5.0+6.0	1.39	1.39	3.47	4.15	---	4.83	10.40	11.36	0.82	2.47	2.85	4.21	A
	20+2.5+2.5+2.5	2.18	2.71	2.71	2.71	---	3.28	10.31	10.93	0.66	2.75	3.09	3.75	A
	20+2.5+2.5+3.5	1.97	2.48	2.48	3.47	---	3.56	10.40	10.60	0.70	2.97	3.09	3.50	B
	20+2.5+2.5+5.0	1.73	2.17	2.17	4.33	---	3.99	10.40	10.96	0.72	2.73	2.95	3.81	A
	20+2.5+2.5+6.0	1.60	2.00	2.00	4.80	---	4.27	10.40	11.00	0.76	2.71	2.93	3.84	A
	20+2.5+2.5+7.1	1.48	1.84	1.84	5.24	---	4.58	10.40	11.03	0.84	2.64	2.92	3.94	A
	20+2.5+3.5+3.5	1.80	2.26	3.17	3.17	---	3.84	10.40	10.61	0.75	2.97	3.08	3.50	B
	20+2.5+3.5+5.0	1.60	2.00	2.80	4.00	---	4.27	10.40	10.97	0.77	2.73	2.95	3.81	A
	20+2.5+3.5+6.0	1.48	1.86	2.60	4.46	---	4.55	10.40	11.01	0.84	2.71	2.93	3.84	A
	20+2.5+3.5+7.1	1.38	1.72	2.41	4.89	---	4.86	10.40	11.04	0.89	2.64	2.92	3.94	A
	20+2.5+5.0+5.0	1.43	1.79	3.59	3.59	---	4.69	10.40	11.32	0.80	2.48	2.86	4.19	A
	20+2.5+5.0+6.0	1.34	1.68	3.35	4.03	---	4.97	10.40	11.36	0.85	2.47	2.85	4.21	A
	20+3.5+3.5+3.5	1.67	2.91	2.91	2.91	---	4.13	10.40	10.62	0.83	2.96	3.08	3.51	B
	20+3.5+3.5+5.0	1.49	2.60	2.60	3.71	---	4.55	10.40	10.98	0.85	2.72	2.94	3.82	A
	20+3.5+3.5+6.0	1.38	2.43	2.43	4.16	---	4.83	10.40	11.02	0.89	2.65	2.93	3.92	A
	20+3.5+5.0+5.0	1.35	2.35	3.35	3.35	---	4.97	10.40	11.33	0.85	2.48	2.86	4.19	A
SMXS90E7V3B	25+25+2.5+2.5	2.60	2.60	2.60	2.60	---	3.42	10.40	10.59	0.68	2.98	3.09	3.49	B
	25+25+2.5+3.5	2.36	2.36	2.36	3.32	---	3.70	10.40	10.60	0.73	2.97	3.09	3.50	B
	25+25+2.5+5.0	2.08	2.08	2.08	4.16	---	4.13	10.40	10.96	0.74	2.73	2.95	3.81	A
	25+25+2.5+6.0	1.93	1.93	1.93	4.61	---	4.41	10.40	11.00	0.79	2.71	2.93	3.84	A
	25+25+2.5+7.1	1.78	1.78	1.78	5.06	---	4.72	10.40	11.03	0.86	2.64	2.92	3.94	A
	25+25+3.5+3.5	2.17	2.17	3.03	3.03	---	3.99	10.40	10.61	0.81	2.97	3.08	3.50	B
	25+25+3.5+5.0	1.93	1.93	2.70	3.84	---	4.41	10.40	10.97	0.82	2.73	2.95	3.81	A
	25+25+3.5+6.5	1.79	1.79	2.51	4.31	---	4.69	10.40	11.01	0.87	2.71	2.93	3.84	A
	25+2.5+3.5+7.1	1.67	1.67	2.33	4.73	---	5.00	10.40	11.04	0.92	2.64	2.92	3.94	A
	25+2.5+5.0+5.0	1.73	1.73	3.47	3.47	---	4.83	10.40	11.32	0.83	2.48	2.86	4.19	A
	25+3.5+3.5+3.5	2.00	2.80	2.80	2.80	---	4.27	10.40	10.62	0.86	2.96	3.08	3.51	B
	25+3.5+3.5+5.0	1.79	2.51	2.51	3.59	---	4.69	10.40	10.98	0.87	2.72	2.94	3.82	A
	25+3.5+3.5+6.0	1.67	2.35	2.35	4.03	---	4.97	10.40	11.02	0.92	2.65	2.93	3.92	A
	35+3.5+3.5+3.5	2.60	2.60	2.60	2.60	---	4.55	10.40	10.63	0.92	2.96	3.07	3.51	B
	35+3.5+3.5+5.0	2.35	2.35	3.35	3.35	---	4.97	10.40	10.99	0.93	2.72	2.94	3.82	A
	20+2.0+2.0+2.0+2.0	2.08	2.08	2.08	2.08	2.08	3.42	10.40	10.94	0.60	2.74	2.96	3.80	A

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			EER	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX		
5MXS90E7V3B	2.0+2.0+2.0+3.5+6.0	134	134	134	235	403	4.97	10.40	11.35	0.85	2.47	2.85	4.21	A
	2.0+2.0+2.5+2.5+2.5	1.81	1.81	2.26	2.26	2.26	3.84	10.40	10.94	0.70	2.74	2.96	3.80	A
	2.0+2.0+2.5+2.5+3.5	1.66	1.66	2.08	2.08	2.92	4.13	10.40	10.95	0.74	2.73	2.95	3.81	A
	2.0+2.0+2.5+2.5+5.0	1.49	1.49	1.86	1.86	3.70	4.55	10.40	11.30	0.75	2.49	2.87	4.18	A
	2.0+2.0+2.5+2.5+6.0	1.39	1.39	1.73	1.73	4.16	4.83	10.40	11.34	0.82	2.47	2.86	4.21	A
	2.0+2.0+2.5+3.5+3.5	1.54	1.54	1.92	2.70	2.70	4.41	10.40	10.96	0.82	2.73	2.95	3.81	A
	2.0+2.0+2.5+3.5+5.0	1.39	1.39	1.72	2.43	3.47	4.83	10.40	11.31	0.83	2.48	2.87	4.19	A
	2.0+2.0+3.5+3.5+3.5	1.44	1.44	2.52	2.50	2.50	4.69	10.40	10.97	0.88	2.72	2.94	3.82	A
	2.0+2.5+2.5+2.5+2.5	1.72	2.17	2.17	2.17	3.99	10.40	10.94	0.72	2.74	2.96	3.80	A	
	2.0+2.5+2.5+2.5+3.5	1.60	2.00	2.00	2.80	4.27	10.40	10.95	0.77	2.73	2.95	3.81	A	
	2.0+2.5+2.5+2.5+5.0	1.44	1.79	1.79	3.59	4.69	10.40	11.30	0.81	2.49	2.87	4.18	A	
	2.0+2.5+2.5+2.5+6.0	1.33	1.68	1.68	4.03	4.97	10.40	11.34	0.85	2.47	2.86	4.21	A	
	2.0+2.5+2.5+3.5+3.5	1.48	1.86	2.60	2.60	4.55	10.40	10.96	0.85	2.73	2.95	3.81	A	
	2.0+2.5+2.5+3.5+5.0	1.34	1.68	1.68	2.35	3.35	4.97	10.40	11.31	0.86	2.48	2.87	4.19	A
	2.0+2.5+3.5+3.5+3.5	1.38	1.73	2.43	2.43	4.83	10.40	10.97	0.90	2.72	2.94	3.82	A	
	2.5+2.5+2.5+2.5+2.5	2.08	2.08	2.08	2.08	4.13	10.40	10.94	0.75	2.74	2.96	3.80	A	
	2.5+2.5+2.5+2.5+3.5	1.93	1.93	1.93	2.68	4.41	10.40	10.95	0.82	2.73	2.95	3.81	A	
	2.5+2.5+2.5+2.5+5.0	1.73	1.73	1.73	3.48	4.83	10.40	11.30	0.83	2.49	2.87	4.18	A	
	2.5+2.5+2.5+3.5+3.5	1.80	1.80	1.80	2.50	2.50	4.69	10.40	10.96	0.88	2.73	2.95	3.81	A
	2.5+2.5+3.5+3.5+3.5	1.69	1.69	2.34	2.34	2.34	4.97	10.40	10.97	0.93	2.72	2.94	3.82	A

Note: Connected to 2.0, 2.5, 3.5 class; wall mounted C type / 5.0, 6.0, 7.1 class; wall mounted E type

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
5MXS90E7V3B	2.0	2.00	---	---	---	---	1.88	2.00	3.03	0.45	0.56	1.02	357	A	280
	2.5	2.50	---	---	---	---	2.00	2.50	3.54	0.49	0.71	1.18	352	A	355
	3.5	3.50	---	---	---	---	2.05	3.50	4.82	0.52	1.14	1.47	307	B	570
	5.0	5.00	---	---	---	---	2.22	5.00	5.50	0.49	1.64	1.83	305	B	820
	6.0	6.00	---	---	---	---	2.33	6.00	6.60	0.50	1.89	2.24	317	B	945
	7.1	7.10	---	---	---	---	2.45	7.10	7.38	0.53	2.57	2.74	276	D	1285
	20+2.0	2.00	2.00	---	---	---	2.11	4.00	5.30	0.50	1.14	1.79	351	A	570
	20+2.5	2.00	2.50	---	---	---	2.16	4.50	5.73	0.50	1.30	1.79	346	A	650
	20+3.5	2.00	3.50	---	---	---	2.27	5.50	6.36	0.50	1.70	2.09	324	A	850
	20+5.0	2.00	5.00	---	---	---	2.44	7.00	7.31	0.50	2.42	2.59	289	C	1210
	20+6.0	1.86	5.56	---	---	---	2.58	7.42	7.96	0.54	2.45	2.81	303	B	1225
	20+7.1	1.71	6.09	---	---	---	2.74	7.80	8.47	0.57	2.69	3.13	290	C	1345
	25+2.5	2.50	2.50	---	---	---	2.22	5.00	6.20	0.46	1.39	1.99	360	A	695
	25+3.5	2.50	3.50	---	---	---	2.33	6.00	6.60	0.50	1.89	2.25	317	B	945
	25+5.0	2.41	4.83	---	---	---	2.51	7.24	7.64	0.53	2.59	2.82	280	D	1295
	25+6.0	2.23	5.36	---	---	---	2.66	7.59	8.25	0.57	2.57	3.00	295	C	1285
	25+7.1	2.08	5.90	---	---	---	2.82	7.98	8.47	0.60	2.81	3.13	284	C	1405
	3.5+3.5	3.50	3.50	---	---	---	2.44	7.00	7.31	0.53	2.52	2.69	278	D	1260
	3.5+5.0	3.13	4.46	---	---	---	2.66	7.59	7.83	0.57	2.82	2.94	269	D	1410
	3.5+6.0	2.93	5.01	---	---	---	2.80	7.94	8.45	0.60	2.81	3.13	283	C	1405
	3.5+7.1	2.75	5.58	---	---	---	2.96	8.33	8.47	0.64	3.07	3.13	271	D	1535
	5.0+5.0	4.06	4.06	---	---	---	2.88	8.12	8.18	0.60	3.09	3.19	263	D	1545
	5.0+6.0	3.85	4.62	---	---	---	3.02	8.47	8.64	0.64	3.09	3.25	274	D	1545
	5.0+7.1	3.66	5.20	---	---	---	3.19	8.86	8.88	0.67	3.36	3.39	264	D	1680
	6.0+6.0	4.41	4.41	---	---	---	3.17	8.82	9.27	0.64	3.08	3.36	286	C	1540
	6.0+7.1	4.12	4.88	---	---	---	3.33	9.00	9.29	0.68	3.08	3.36	292	C	1540
	7.1+7.1	4.50	4.50	---	---	---	3.49	9.00	9.31	0.71	3.02	3.36	298	C	1510
	20+2.0+2.0	2.00	2.00	2.00	---	---	2.33	6.00	6.63	0.50	1.66	1.96	361	A	830
	20+2.0+2.5	2.00	2.00	2.50	---	---	2.38	6.50	6.97	0.50	1.91	2.17	340	A	955
	20+2.0+3.5	1.93	1.93	3.38	---	---	2.51	7.24	7.64	0.54	2.34	2.57	309	B	1170
	20+2.0+5.0	1.72	1.72	4.33	---	---	2.73	7.77	8.53	0.57	2.59	3.09	300	C	1295
	20+2.0+6.0	1.62	1.62	4.88	---	---	2.88	8.12	9.03	0.58	2.56	3.22	317	B	1280
	20+2.0+7.1	1.53	1.53	5.45	---	---	3.04	8.51	9.30	0.61	2.82	3.36	302	B	1410
	20+2.5+2.5	2.00	2.50	2.50	---	---	2.44	7.00	7.31	0.50	2.17	2.40	323	A	1085
	20+2.5+3.5	1.86	2.32	3.24	---	---	2.58	7.42	7.96	0.54	2.45	2.81	303	B	1225
	20+2.5+5.0	1.67	2.09	4.18	---	---	2.80	7.94	8.65	0.57	2.71	3.15	293	C	1355
	20+2.5+6.0	1.58	1.98	4.74	---	---	2.95	8.30	9.10	0.61	2.69	3.22	309	B	1345
	20+2.5+7.1	1.50	1.87	5.31	---	---	3.11	8.68	9.30	0.64	2.95	3.36	294	C	1475
	20+3.5+3.5	1.73	3.02	3.02	---	---	2.73	7.77	8.47	0.57	2.69	3.13	289	C	1345
	20+3.5+5.0	1.58	2.77	3.95	---	---	2.95	8.30	8.66	0.61	2.96	3.16	280	C	1480
	20+3.5+6.0	1.50	2.63	4.52	---	---	3.10	8.65	9.29	0.64	2.95	3.36	293	C	1475
	20+3.5+7.1	1.43	2.50	5.07	---	---	3.26	9.00	9.31	0.68	3.15	3.36	286	C	1575
	20+5.0+5.0	1.46	3.68	3.68	---	---	3.17	8.82	9.02	0.64	3.18	3.32	277	D	1590
	20+5.0+6.0	1.39	3.46	4.15	---	---	3.32	9.00	9.47	0.68	2.97	3.39	303	B	1485
	20+5.0+7.1	1.28	3.19	4.53	---	---	3.48	9.00	9.49	0.71	2.90	3.39	310	B	1450
	20+6.0+6.0	1.28	3.86	3.86	---	---	3.46	9.00	9.93	0.68	2.68	3.46	336	A	1340
	20+6.0+7.1	1.19	3.58	4.23	---	---	3.63	9.00	10.40	0.71	2.61	4.00	345	A	1305
	25+2.5+2.5	2.41	2.41	2.41	---	---	2.51	7.23	7.64	0.54	2.34	2.57	309	B	1170
	25+2.5+3.5	2.23	2.23	3.13	---	---	2.66	7.59	8.25	0.57	2.57	3.00	295	C</td	

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
SMXS90E7V3B	25+50+7.1	1.54	3.08	4.38	---	---	3.55	9.00	9.49	0.71	2.97	3.39	3.03	B	1485
	25+60+6.0	1.56	3.72	3.72	---	---	3.54	9.00	9.93	0.71	2.75	3.46	3.27	A	1375
	25+60+7.1	1.44	3.46	4.10	---	---	3.70	9.00	10.40	0.71	2.68	4.00	3.36	A	1340
	35+35+3.5	2.77	2.77	2.77	---	---	2.95	8.31	8.60	0.64	3.07	3.26	2.71	D	1535
	35+35+5.0	2.57	2.57	3.68	---	---	3.17	8.82	8.84	0.67	3.29	3.32	2.68	D	1645
	35+35+6.0	2.42	2.42	4.16	---	---	3.32	9.00	9.30	0.68	3.08	3.36	2.92	C	1540
	35+35+7.1	2.23	2.23	4.54	---	---	3.48	9.00	9.32	0.71	3.02	3.36	2.98	C	1510
	35+50+5.0	2.34	3.33	3.33	---	---	3.39	9.00	9.02	0.71	3.32	3.35	2.71	D	1660
	35+50+6.0	2.18	3.10	3.72	---	---	3.54	9.00	9.48	0.71	3.04	3.39	2.96	C	1520
	35+50+7.1	2.02	2.88	4.10	---	---	3.70	9.00	9.94	0.75	2.97	3.91	3.03	B	1485
	35+60+6.0	2.04	3.48	3.48	---	---	3.69	9.00	10.38	0.71	2.75	4.00	3.27	A	1375
	50+50+5.0	3.00	3.00	3.00	---	---	3.61	9.00	9.78	0.75	3.21	4.07	2.80	C	1605
	20+2.0+2.0+2.0	1.86	1.86	1.86	---	---	2.58	7.44	7.96	0.54	2.04	2.32	3.65	A	1020
	20+2.0+2.0+2.5	1.79	1.79	1.79	2.22	---	2.66	7.59	8.25	0.54	2.09	2.50	3.63	A	1045
	20+2.0+2.0+3.5	1.67	1.67	1.67	2.93	---	2.80	7.94	8.78	0.58	2.32	2.82	3.42	A	1160
	20+2.0+2.0+5.0	1.54	1.54	1.54	3.85	---	3.02	8.47	9.30	0.61	2.71	3.25	3.13	B	1355
	20+2.0+2.0+6.0	1.47	1.47	1.47	4.41	---	3.17	8.82	9.81	0.65	2.68	3.38	3.29	A	1340
	20+2.0+2.0+7.1	1.37	1.37	1.37	4.89	---	3.33	9.00	9.96	0.65	2.82	3.46	3.19	B	1410
	20+2.0+2.5+2.5	1.73	1.73	2.16	2.16	---	2.73	7.78	8.53	0.58	2.21	2.69	3.52	A	1105
	20+2.0+2.5+3.5	1.62	1.62	2.03	2.85	---	2.88	8.12	9.03	0.58	2.56	3.22	3.17	B	1280
	20+2.0+2.5+5.0	1.50	1.50	1.88	3.77	---	3.10	8.65	9.49	0.64	2.84	3.39	3.05	B	1420
	20+2.0+2.5+6.0	1.44	1.44	1.80	4.32	---	3.24	9.00	9.94	0.65	2.81	3.46	3.20	A	1405
	20+2.0+2.5+7.1	1.32	1.32	1.65	4.71	---	3.41	9.00	9.96	0.68	2.82	3.46	3.19	B	1410
	20+2.0+3.5+3.5	1.54	1.54	2.70	2.70	---	3.02	8.48	9.13	0.61	2.82	3.22	3.01	B	1410
	20+2.0+3.5+5.0	1.44	1.44	2.52	3.60	---	3.24	9.00	9.49	0.64	3.04	3.39	2.96	C	1520
	20+2.0+3.5+6.0	1.33	1.33	2.34	4.00	---	3.39	9.00	9.95	0.68	2.75	3.46	3.27	A	1375
	20+2.0+3.5+7.1	1.23	1.23	2.16	4.38	---	3.55	9.00	9.97	0.71	2.68	3.46	3.36	A	1340
	20+2.0+5.0+5.0	1.29	1.29	3.21	3.21	---	3.46	9.00	9.68	0.68	2.92	3.42	3.08	B	1460
	20+2.0+5.0+6.0	1.20	1.20	3.00	3.60	---	3.61	9.00	10.45	0.71	2.70	3.88	3.33	A	1350
	20+2.5+2.5+2.5	1.67	2.09	2.09	2.09	---	2.80	7.94	8.78	0.58	2.32	2.82	3.42	A	1160
	20+2.5+2.5+3.5	1.57	1.98	1.98	2.77	---	2.95	8.30	9.12	0.61	2.69	3.22	3.09	B	1345
	20+2.5+2.5+5.0	1.46	1.84	1.84	3.68	---	3.17	8.82	9.49	0.64	2.90	3.39	3.04	B	1450
	20+2.5+2.5+6.0	1.39	1.73	1.73	4.15	---	3.32	9.00	9.94	0.65	2.75	3.46	3.27	A	1375
	20+2.5+2.5+7.1	1.27	1.60	1.60	4.53	---	3.48	9.00	9.96	0.68	2.68	3.46	3.36	A	1340
	20+2.5+3.5+3.5	1.50	1.89	2.63	2.63	---	3.10	8.65	9.31	0.64	2.88	3.36	3.00	B	1440
	20+2.5+3.5+5.0	1.39	1.73	2.42	3.46	---	3.32	9.00	9.49	0.68	3.04	3.39	2.96	C	1520
	20+2.5+3.5+6.0	1.28	1.61	2.25	3.86	---	3.46	9.00	9.95	0.68	2.75	3.46	3.27	A	1375
	20+2.5+3.5+7.1	1.19	1.49	2.09	4.23	---	3.63	9.00	10.42	0.71	2.68	4.01	3.36	A	1340
	20+2.5+5.0+5.0	1.25	1.55	3.10	3.10	---	3.54	9.00	9.68	0.71	2.92	3.42	3.08	B	1460
	20+2.5+5.0+6.0	1.17	1.45	2.90	3.48	---	3.69	9.00	10.49	0.71	2.70	3.96	3.33	A	1350
	20+3.5+3.5+3.5	1.44	2.52	2.52	2.52	---	3.24	9.00	9.32	0.68	3.15	3.36	2.86	C	1575
	20+3.5+3.5+5.0	1.29	2.25	2.25	3.21	---	3.46	9.00	9.50	0.71	3.04	3.39	2.96	C	1520
	20+3.5+3.5+6.0	1.20	2.10	2.10	3.60	---	3.61	9.00	10.40	0.71	2.75	4.01	3.27	A	1375
	20+3.5+5.0+5.0	1.17	2.03	2.90	2.90	---	3.69	9.00	10.26	0.75	2.92	4.19	3.08	B	1460
	25+2.5+2.5+2.5	2.03	2.03	2.03	2.03	---	2.88	8.12	9.03	0.58	2.56	3.22	3.17	B	1280
	25+2.5+2.5+3.5	1.93	1.93	2.68	2.68	---	3.02	8.47	9.12	0.61	2.82	3.22	3.00	B	1410
	25+2.5+2.5+5.0	1.80	1.80	1.80	3.60	---	3.24	9.00	9.49	0.64	3.04	3.39	2.96	C	1520
	25+2.5+2.5+6.0	1.67	1.67	1.67	3.99	---	3.39	9.00	9.94	0.68	2.75	3.46	3.27	A	1375
	25+2.5+2.5+7.1	1.54	1.54	1.54	4.38	---	3.55	9.00	9.96	0.71	2.68	3.46	3.36	A	1340
	25+2.5+3.5+3.5	1.84	2.57	2.57	2.57	---	3.17	8.82	9.31	0.64	3.02	3.36	2.92	C	1510
	25+2.5+3.5+5.0	1.67	2.33	2.33	3.33	---	3.39	9.00	9.49	0.68	3.04	3.39	2.96	C	1520
	25+2.5+3.5+6.5	1.55	1.55	2.18	3.72	---	3.54	9.00	9.95	0.71	2.75	3.46	3.27	A	1375
	25+2.5+3.5+7.1	1.44	1.44	2.02	4.10	---	3.70	9.00	10.42	0.71	2.68	4.01	3.36	A	1340
	25+2.5+5.0+5.0	1.50	1.50	3.00	3.00	---	3.61	9.00	10.25	0.71	2.92	4.18	3.08	B	1460
	25+3.5+3.5+3.5	1.74	2.42	2.42	2.42	---	3.32	9.00	9.34	0.68	3.15	3.36	2.86	C	1575
	25+3.5+3.5+5.0	1.56	2.17	2.17	3.10	---	3.54	9.00	9.50	0.71	3.04	3.39	2.96	C	1520
	25+3.5+3.5+6.0	1.46	2.03	2.03	3.48	---	3.69	9.00	10.40	0.71	2.75	4.01	3.27	A	1375
	35+3.5+3.5+3.5	2.25	2.25	2.25	2.25	---	3.46	9.00	9.32	0.71	3.15	3.36	2.86	C	1575
	35+3.5+3.5+5.0	2.03	2.03	2.03	2.91	---	3.69	9.00	9.95	0.75	3.04	3.91	2.96	C	1520
	20+2.0+2.0+2.0+2.0	1.63	1.63	1.63	1.63	1.63	2.88	8.15	9.03	0.58	2.30	2.81	3.54	A	1150
	20+2.0+2.0+2.0+2.5	1.58	1.58	1.58	1.98	2.95	8.30	9.25	9.58	0.58	2.36	2.95	3.52	A	1180
	20+2.0+2.0+2.0+3.5	1.50	1.50	1.50	1.50	2.65	3.10	8.65	9.64	0.61	2.55	3.24	3.39	A	1275
	20+2.0+2.0+2.0+5.0	1.38	1.38	1.38	1.38	3.48	3.32	9.00	10.09	0.65	2.70	3.49	3.33	A	1350
	20+2.0+2.0+2.0+6.0	1.29	1.29	1.29	1.29	3.84	3.46	9.00	10.31	0.65	2.50	3.40	3.60	A	1250
	20+2.0+2.0+2.0+7.1	1.19	1.19	1.19	1.19	4.24	3.63	9.00	10.46	0.68	2.47	3.48	3.64	A	1235
	20+2.0+2.0+2.5+2.5	1.54	1.54	1.54	1.92	1.92	3.02	8.46	9.45	0.61	2.49	3.09	3.40	A	1245
	20+2.0+2.0+2.5+3.5	1.47	1.47	1.47	1.84	2.57	3.17	8.82	9.81	0.61	2.68	3.39	3.29	A	1340
	20+2.0+2.0+2.5+5.0	1.33	1.33	1.33	1.67	3.34	3.39	9.00	10.15	0.65	2.70	3.49	3.33	A	1350
	20+2.0+2.0+2.5+6.0	1.24	1.24	1.24	1.55	3.73	3.54	9.00	10.38	0.68	2.50	3.40	3.60	A	1250
	20+2.0+2.0+2.5+7.1	1.15	1.15	1.15	1.44	4.11	3.70	9.00	10.50	0.7					

## COOLING

OUTDOOR UNIT	INDOOR UNITS	COOLING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT COOLING (KW)			EER	ENERGY LABEL	AEC (kWh)
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX			
<b>SMXS90E7V3B</b>	20+25+35+35+35	1.20	1.50	2.10	2.10	2.10	3.61	9.00	10.42	0.71	2.82	4.01	3.19	B	1410
	25+25+25+25+25	1.80	1.80	1.80	1.80	1.80	3.24	9.00	9.95	0.65	2.81	3.46	3.20	A	1405
	25+25+25+25+35	1.67	1.67	1.67	1.67	2.32	3.39	9.00	9.96	0.68	2.75	3.46	3.27	A	1375
	25+25+25+25+50	1.50	1.50	1.50	1.50	3.00	3.61	9.00	10.45	0.71	2.70	3.88	3.33	A	1350
	25+25+25+35+35	1.56	1.56	2.16	2.16	2.16	3.54	9.00	9.97	0.68	2.82	3.46	3.19	B	1410
	25+25+35+35+35	1.44	1.44	2.04	2.04	2.04	3.69	9.00	10.42	0.71	2.75	4.01	3.27	A	1375

## HEATING

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			EER	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX		
<b>SMXS90E7V3B</b>	2.0	2.44	---	---	---	---	1.36	2.44	4.20	0.35	0.68	1.38	3.59	B
	25	3.05	---	---	---	---	1.42	3.05	4.65	0.37	0.90	1.48	3.39	C
	35	4.27	---	---	---	---	1.54	4.27	5.11	0.39	1.43	1.95	2.99	D
	50	6.09	---	---	---	---	1.98	6.09	7.42	0.48	1.91	2.48	3.19	D
	60	7.31	---	---	---	---	2.28	7.31	8.53	0.60	2.30	2.89	3.18	D
	7.1	8.65	---	---	---	---	2.60	8.65	9.02	0.67	2.87	3.04	3.01	D
<b>SMXS90E7V3B</b>	20+2.0	2.44	2.44	---	---	---	1.69	4.88	6.85	0.39	1.21	1.87	4.03	A
	20+2.5	2.44	3.05	---	---	---	1.84	5.49	7.25	0.41	1.40	2.05	3.92	A
	20+3.5	2.44	4.26	---	---	---	2.13	6.70	7.74	0.50	1.99	2.44	3.37	C
	20+5.0	2.44	6.09	---	---	---	2.57	8.53	9.09	0.63	2.45	2.66	3.48	B
	20+6.0	2.32	6.95	---	---	---	2.86	9.27	9.88	0.65	2.63	2.96	3.52	B
	20+7.1	2.20	7.83	---	---	---	3.17	10.03	10.37	0.69	3.01	3.18	3.33	C
<b>SMXS90E7V3B</b>	25+2.5	3.04	3.04	---	---	---	1.98	6.08	7.46	0.47	1.76	2.35	3.45	B
	25+3.5	3.05	4.26	---	---	---	2.28	7.31	8.53	0.60	2.34	2.94	3.12	D
	25+5.0	2.98	5.95	---	---	---	2.72	8.93	9.70	0.66	2.61	2.99	3.42	B
	25+6.0	2.83	6.79	---	---	---	3.00	9.62	9.88	0.67	2.86	3.03	3.36	C
	25+7.1	2.70	7.68	---	---	---	3.31	10.38	10.77	0.72	3.22	3.46	3.22	C
	35+3.5	4.27	4.27	---	---	---	2.57	8.54	9.02	0.65	2.91	3.15	2.93	D
<b>SMXS90E7V3B</b>	35+5.0	3.96	5.66	---	---	---	3.00	9.62	9.70	0.71	2.93	2.98	3.28	C
	35+6.0	3.80	6.51	---	---	---	3.28	10.31	10.75	0.72	3.19	3.43	3.23	C
	35+7.1	3.43	6.97	---	---	---	3.59	10.40	10.78	0.77	3.11	3.35	3.34	C
	50+5.0	5.20	5.20	---	---	---	3.42	10.40	10.64	0.76	3.28	3.40	3.17	D
	50+6.0	4.73	5.67	---	---	---	3.70	10.40	10.88	0.75	3.08	3.31	3.38	C
	50+7.1	4.30	6.10	---	---	---	4.01	10.40	10.51	0.83	3.01	3.06	3.46	B
<b>SMXS90E7V3B</b>	60+6.0	5.20	5.20	---	---	---	3.99	10.40	10.71	0.76	2.88	3.04	3.61	A
	60+7.1	4.76	5.64	---	---	---	4.30	10.40	10.74	0.84	2.86	3.03	3.64	A
	7.1+7.1	5.20	5.20	---	---	---	4.61	10.40	10.77	0.89	2.85	3.02	3.65	A
	20+20+2.0	2.44	2.44	2.44	---	---	2.28	7.32	8.67	0.53	1.84	2.32	3.98	A
	20+20+2.5	2.44	2.44	3.04	---	---	2.43	7.92	9.21	0.55	2.05	2.58	3.86	A
	20+20+3.5	2.38	2.38	4.17	---	---	2.72	8.93	9.89	0.60	2.42	2.89	3.69	A
<b>SMXS90E7V3B</b>	20+20+5.0	2.21	2.21	5.54	---	---	3.14	9.96	10.48	0.65	2.84	3.07	3.51	B
	20+20+6.0	2.08	2.08	6.24	---	---	3.42	10.40	10.71	0.66	2.87	3.04	3.62	A
	20+20+7.1	1.87	1.87	6.66	---	---	3.73	10.40	10.75	0.70	2.86	3.03	3.64	A
	20+25+2.5	2.43	3.05	3.05	---	---	2.57	8.53	9.21	0.57	2.28	2.58	3.74	A
	20+25+3.5	2.31	2.90	4.06	---	---	2.86	9.27	9.89	0.62	2.57	2.89	3.61	A
	20+25+5.0	2.17	2.71	5.43	---	---	3.28	10.31	10.48	0.67	3.02	3.07	3.41	B
<b>SMXS90E7V3B</b>	20+25+6.0	1.98	2.48	5.94	---	---	3.56	10.40	10.71	0.68	2.87	3.04	3.62	A
	20+25+7.1	1.79	2.24	6.37	---	---	3.87	10.40	10.75	0.73	2.86	3.03	3.64	A
	20+35+3.5	2.22	3.87	3.87	---	---	3.14	9.96	10.36	0.69	2.89	3.12	3.45	B
	20+35+5.0	1.98	3.47	4.95	---	---	3.56	10.40	10.90	0.72	3.07	3.30	3.39	C
	20+35+6.0	1.80	3.17	5.43	---	---	3.84	10.40	10.72	0.73	2.87	3.04	3.62	A
	20+35+7.1	1.65	2.89	5.86	---	---	4.15	10.40	10.75	0.81	2.86	3.03	3.64	A
<b>SMXS90E7V3B</b>	20+50+5.0	1.74	4.33	4.33	---	---	3.99	10.40	10.63	0.80	2.96	3.08	3.51	B
	20+50+6.0	1.60	4.00	4.80	---	---	4.27	10.40	10.86	0.79	2.77	2.99	3.75	A
	20+50+7.1	1.47	3.69	5.24	---	---	4.58	10.40	10.89	0.86	2.75	2.97	3.78	A
	20+60+6.0	1.48	4.46	4.46	---	---	4.55	10.40	11.09	0.82	2.62	2.90	3.97	A
	20+60+7.1	1.38	4.13	4.89	---	---	4.86	10.40	11.12	0.87	2.61	2.89	3.98	A
	25+25+2.5	2.98	2.98	2.98	---	---	2.72	8.94	9.88	0.60	2.42	2.89	3.69	A
<b>SMXS90E7V3B</b>	25+25+3.5	2.83	2.83	3.96	---	---	3.00	9.62	9.89	0.67	2.73	2.89	3.52	B
	25+25+5.0	2.60	2.60	5.20	---	---	3.42	10.40	10.89	0.70	3.07	3.30	3.39	C
	25+25+6.0	2.36	2.36	5.68	---	---	3.70	10.40	10.71	0.71	2.87	3.04	3.62	A
	25+25+7.1	2.15	2.15	6.10	---	---	4.01	10.40	10.75	0.78	2.86	3.03	3.64	A
	25+35+3.5	2.71	3.80	3.80	---	---	3.28	10.31	10.76	0.72	3.12	3.35	3.30	C
	25+35+5.0	2.36	3.31	4.73	---	---	3.70	10.40	10.90	0.75	3.07	3.30	3.39	C
<b>SMXS90E7V3B</b>	25+35+6.0	2.17	3.03	5.20	---	---	3.99	10.40	10.72	0.76	2.87	3.04	3.62	A
	25+35+7.1	1.98	2.78	5.64	---	---	4.30	10.40	10.75	0.83	2.86	3.03	3.64	A
	25+50+5.0	2.08	4.16	4.16	---	---	4.13	10.40	10.63	0.83	2.96	3.08	3.51	B
	25+50+6.0	1.93	3.85	4.62	---	---	4.41	10.40	10.86	0.84	2.77	2.99	3.75	A
	25+50+7.1	1.78	3.56	5.06	---	---	4.72	10.40	10.89	0.89	2.75	2.97	3.78	A
	25+60+6.0	1.80	4.30	4.30	---	---	4.69	10.40	11.09	0.85	2.62	2.90	3.97	A
<b>SMXS90E7V3B</b>	25+60+7.1	1.67	4.00	4.73	---	---	5.00	10.40	11.12	0.90	2.61	2.89	3.98	A
	35+35+3.5	3.46	3.46	3.46	---	---	3.56	10.38	10.76	0.77	3.12	3.35	3.33	C
	35+35+5.0	3.03	3.03	4.34	---	---	3.99	10.40	10.91	0.83	3.07	3.30	3.39	C
	35+35+6.0	2.80	2.80	4.80	---	---	4.27	10.40	10.73	0.84	2.87	3.04	3.62	A
	35+35+7.1	2.58	2.58	5.24	---	---	4.58	10.40	10.76	0.89	2.86	3.02	3.64	A
	35+50+5.0	2.70	3.85	3.85	---	---	4.41	10.40	10.64	0.89	2.96	3.07</td		

## **HEATING**

OUTDOOR UNIT	INDOOR UNITS	HEATING CAPACITY (KW)					TOTAL CAPACITY (KW)			POWER INPUT HEATING (KW)			EER	ENERGY LABEL
		ROOM A	ROOM B	ROOM C	ROOM D	ROOM E	MIN	NOM	MAX	MIN	NOM	MAX		
5MXS90E7V3B	20+20+20+35	2.17	2.17	2.17	3.80	---	3.28	10.31	10.73	0.63	2.81	3.04	3.67	A
	20+20+20+50	1.89	1.89	1.89	4.73	---	3.70	10.40	10.86	0.68	2.76	2.99	3.77	A
	20+20+20+60	1.73	1.73	1.73	5.21	---	3.99	10.40	11.09	0.69	2.62	2.90	3.97	A
	20+20+20+71	1.59	1.59	1.59	5.63	---	4.30	10.40	11.12	0.74	2.61	2.88	3.98	A
	20+20+25+25	2.21	2.21	2.77	2.77	---	3.14	9.96	10.72	0.61	2.65	3.04	3.76	A
	20+20+25+35	2.08	2.08	2.60	3.64	---	3.42	10.40	10.73	0.66	2.87	3.04	3.62	A
	20+20+25+50	1.81	1.81	2.26	4.52	---	3.84	10.40	10.86	0.71	2.76	2.99	3.77	A
	20+20+25+60	1.66	1.66	2.08	5.00	---	4.13	10.40	11.09	0.72	2.62	2.90	3.97	A
	20+20+25+71	1.53	1.53	1.91	5.43	---	4.44	10.40	11.12	0.79	2.61	2.88	3.98	A
	20+20+35+35	1.89	1.89	3.31	3.31	---	3.70	10.40	10.74	0.71	2.87	3.03	3.62	A
	20+20+35+50	1.66	1.66	2.91	4.17	---	4.13	10.40	10.87	0.76	2.76	2.98	3.77	A
	20+20+35+60	1.54	1.54	2.70	4.62	---	4.41	10.40	11.10	0.77	2.61	2.89	3.98	A
	20+20+35+71	1.42	1.42	2.49	5.07	---	4.72	10.40	11.13	0.84	2.60	2.88	4.00	A
	20+20+50+50	1.49	1.49	3.71	3.71	---	4.55	10.40	11.01	0.84	2.71	2.93	3.84	A
	20+20+50+60	1.39	1.39	3.47	4.15	---	4.83	10.40	11.23	0.85	2.51	2.90	4.14	A
	20+25+25+25	2.18	2.71	2.71	2.71	---	3.28	10.31	10.72	0.64	2.82	3.04	3.66	A
	20+25+25+35	1.97	2.48	2.48	3.47	---	3.56	10.40	10.73	0.68	2.87	3.04	3.62	A
	20+25+25+50	1.73	2.17	2.17	4.33	---	3.99	10.40	10.86	0.73	2.76	2.99	3.77	A
	20+25+25+60	1.60	2.00	2.00	4.80	---	4.27	10.40	11.09	0.74	2.62	2.90	3.97	A
	20+25+25+71	1.48	1.84	1.84	5.24	---	4.58	10.40	11.12	0.82	2.61	2.88	3.98	A
	20+25+35+35	1.80	2.26	3.17	3.17	---	3.84	10.40	10.74	0.73	2.87	3.03	3.62	A
	20+25+35+50	1.60	2.00	2.80	4.00	---	4.27	10.40	10.87	0.78	2.76	2.98	3.77	A
	20+25+35+60	1.48	1.86	2.60	4.46	---	4.55	10.40	11.10	0.82	2.61	2.89	3.98	A
	20+25+35+71	1.38	1.72	2.41	4.89	---	4.86	10.40	11.13	0.87	2.60	2.88	4.00	A
	20+25+50+50	1.43	1.79	3.59	3.59	---	4.69	10.40	11.01	0.87	2.71	2.93	3.84	A
	20+25+50+60	1.34	1.68	3.35	4.03	---	4.97	10.40	11.23	0.88	2.51	2.90	4.14	A
5MXS90E7V3B	20+35+35+35	1.67	2.91	2.91	2.91	---	4.13	10.40	10.74	0.78	2.86	3.03	3.64	A
	20+35+35+50	1.49	2.60	2.60	3.71	---	4.55	10.40	10.88	0.87	2.76	2.98	3.77	A
	20+35+35+60	1.38	2.43	2.43	4.16	---	4.83	10.40	11.11	0.87	2.61	2.89	3.98	A
	20+35+50+50	1.35	2.35	3.35	3.35	---	4.97	10.40	11.01	0.92	2.65	2.93	3.92	A
	25+25+25+25	2.60	2.60	2.60	2.60	---	3.42	10.40	10.72	0.66	2.87	3.04	3.62	A
	25+25+25+35	2.36	2.36	2.36	3.32	---	3.70	10.40	10.73	0.71	2.87	3.04	3.62	A
	25+25+25+50	2.08	2.08	2.08	4.16	---	4.13	10.40	10.86	0.76	2.76	2.99	3.77	A
	25+25+25+60	1.93	1.93	1.93	4.61	---	4.41	10.40	11.09	0.77	2.62	2.90	3.97	A
	25+25+25+71	1.78	1.78	1.78	5.06	---	4.72	10.40	11.12	0.84	2.61	2.88	3.98	A
	25+25+35+35	2.17	2.17	3.03	3.03	---	3.99	10.40	10.74	0.76	2.87	3.03	3.62	A
	25+25+35+50	1.93	1.93	2.70	3.84	---	4.41	10.40	10.87	0.84	2.76	2.98	3.77	A
	25+25+35+65	1.79	1.79	2.51	4.31	---	4.69	10.40	11.10	0.85	2.61	2.89	3.98	A
	25+25+35+71	1.67	1.67	2.33	4.73	---	5.00	10.40	11.13	0.90	2.60	2.88	4.00	A
	25+25+50+50	1.73	1.73	3.47	3.47	---	4.83	10.40	11.01	0.90	2.71	2.93	3.84	A
	25+35+35+35	2.00	2.80	2.80	2.80	---	4.27	10.40	10.74	0.84	2.86	3.03	3.64	A
	25+35+35+60	1.67	2.35	2.35	4.03	---	4.97	10.40	11.11	0.90	2.61	2.89	3.98	A
	35+35+35+35	2.60	2.60	2.60	2.60	---	4.55	10.40	10.75	0.89	2.86	3.03	3.64	A
5MXS90E7V3B	35+35+35+50	2.35	2.35	2.35	3.35	---	4.97	10.40	10.89	0.95	2.76	2.98	3.77	A
	20+20+20+20+20	2.08	2.08	2.08	2.08	3.42	10.40	11.10	0.58	2.62	2.89	3.97	A	
	20+20+20+20+25	1.98	1.98	1.98	1.98	3.56	10.40	11.10	0.60	2.62	2.89	3.97	A	
	20+20+20+20+35	1.81	1.81	1.81	1.81	3.16	3.84	10.40	11.11	0.67	2.61	2.89	3.98	A
	20+20+20+20+50	1.60	1.60	1.60	1.60	4.00	4.27	10.40	11.24	0.71	2.51	2.90	4.14	A
	20+20+20+20+60	1.49	1.49	1.49	1.49	4.44	4.55	10.40	11.47	0.72	2.38	2.81	4.37	A
	20+20+20+20+71	1.38	1.38	1.38	1.38	4.88	4.86	10.40	11.50	0.79	2.36	2.79	4.41	A
	20+20+20+25+25	1.90	1.90	1.90	2.35	2.35	3.70	10.40	11.10	0.62	2.62	2.89	3.97	A
	20+20+20+25+35	1.73	1.73	1.73	2.17	3.04	3.99	10.40	11.11	0.69	2.61	2.89	3.98	A
	20+20+20+25+50	1.54	1.54	1.54	1.93	3.85	4.41	10.40	11.24	0.74	2.51	2.90	4.14	A
	20+20+20+25+60	1.43	1.43	1.43	1.80	4.31	4.69	10.40	11.47	0.74	2.38	2.81	4.37	A
	20+20+20+25+71	1.33	1.33	1.33	1.67	4.74	5.00	10.40	11.50	0.82	2.36	2.79	4.41	A
	20+20+20+35+35	1.90	1.90	1.90	2.35	2.35	3.70	10.40	11.10	0.62	2.62	2.89	3.97	A
	20+20+20+35+50	1.43	1.43	1.43	2.51	3.60	4.69	10.40	11.25	0.82	2.51	2.89	4.14	A
	20+20+20+35+60	1.34	1.34	1.34	2.35	4.03	4.97	10.40	11.48	0.82	2.37	2.80	4.39	A
	20+20+25+25+15	1.81	1.81	2.26	2.26	3.84	10.40	11.10	0.67	2.62	2.89	3.97	A	
	20+20+25+25+35	1.66	1.66	2.08	2.08	2.92	4.13	10.40	11.11	0.71	2.61	2.89	3.98	A
	20+20+25+25+50	1.49	1.49	1.86	1.86	3.70	4.55	10.40	11.24	0.76	2.51	2.90	4.14	A
	20+20+25+25+60	1.39	1.39	1.73	1.73	4.16	4.83	10.40	11.47	0.80	2.38	2.81	4.37	A
	20+20+25+35+50	1.39	1.39	1.72	2.43	3.47	4.83	10.40	11.25	0.84	2.51	2.89	4.14	A
	20+20+35+35+35	1.44	1.44	2.52	2.50	2.50	4.69	10.40	11.12	0.84	2.61	2.89	3.98	A
	20+25+25+25+25	1.72	2.17	2.17	2.17	3.99	10.40	11.10	0.69	2.62	2.89	3.97	A	
	20+25+25+25+35	1.60	2.00	2.00	2.00	2.80	4.27	10.40	11.11	0.74	2.61	2.89	3.98	A
	20+25+25+25+50	1.44	1.44	1.79	1.79	3.59	4.69	10.40	11.24	0.82	2.51	2.90	4.14	A
	20+25+25+25+60	1.33	1.68	1.68	1.68	4.03	4.97	10.40	11.47	0.82	2.38	2.81	4.37	A
	20+25+25+35+35	1.48	1.86	1.86	2.60	4.55	10.40	11.11	0.77	2.61	2.89	3.98	A	
	20+25+25+35+50	1.34	1.68	1.68	2.35	3.35	4.97	10.40	11.25	0.87	2.51	2.89	4.14	A
	20+25+35+35+35	1.38	1.73	2.43	2.43	4.83	10.40	11.12	0.87	2.61	2.89	3.98	A	
	25+25+25+25+25	2.08	2.08	2.08	2.08	4.13	10.40	11.10	0.72	2.62	2.89	3.97	A	
	25+25+25+25+35	1.93	1.93	1.93	1.93	2.68	4.41	10.40	11.11	0.77	2.61	2.89	3.98	A
	25+25+25+25+50	1.73	1.73	1.73	3.48	4.83	10.40	11.24	0.85	2.51	2.90	4.14	A	
	25+25+25+35+35	1.80	1.80	1.80	2.50	2.50	4.69	10.40	11.11	0.85	2.61	2.89	3.98	A
	25+25+35+35+35	1.69	1.69	2.34	2.34	2.34	4.97	10.40	11.12	0.90	2.61	2.89	3.98	A

Note: Connected to 2.0, 2.5, 3.5, 5.0 class: wall mounted D type / 6.0, 7.1 class: wall mounted E type

Note: EER = Energy Efficiency Ratio

COP = Coefficient of Performance

AEC = Annual Energy Consumption



AIR CONDITIONING

### Head Office

#### Daikin Airconditioning UK Limited

The Heights, Brooklands, Weybridge, Surrey KT13 0NY  
Tel 0845 6419000 Fax 0845 6419109

[www.daikin.co.uk](http://www.daikin.co.uk)



Daikin Europe N.V. is approved by LRQA for its Quality Management System in accordance with the ISO9001 standard. ISO9001 pertains to quality assurance regarding design, development, manufacturing as well as to services related to the product.



ISO14001 assures an effective environmental management system in order to help protect human health and the environment from the potential impact of our activities, products and services and to assist in maintaining and improving the quality of the environment.



Daikin units comply with the European regulations that guarantee the safety of the product.



Daikin Europe N.V. participates in the Eurovent Certification Programme for Air Conditioners (AC), Liquid Chilling Packages (LCP) and Fan Coil Units (FC); the certified data of certified models are listed in the Eurovent Directory. Multi units are Eurovent certified for combinations up to 2 indoor units.

Daikin products are distributed by:

"The present catalogue is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this catalogue to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this catalogue. All content is copyrighted by Daikin Europe N.V."